

## ACH Adjustable horizontal plate clamps

**Working load limit (WLL) 1300 - 10000 kg**

The ACH horizontal plate clamps offer superb flexibility because of the large adjustable jaw opening. The jaw is adjusted using a simple ratchet mechanism.

These clamps are to be used in pairs and are especially suited to the transportation of large plate bundles.

### Workmanship and parts

These plate clamps are service-friendly, making it easy to exchange parts, which are readily available. Clamp repairs must be done by a trained person.

**Product group: I2**


## INFO

The sling angle from the vertical must not exceed 45°!

The capacity applies to a pair of lifting clamps.

Use a spreader beam for larger plates.


Chain slings and shackle are not included.



### Technical data ACH

| Model   | Art.-No.  | *WLL<br>kg | Jaw capacity<br>Z<br>mm | *Weight<br>kg |
|---------|-----------|------------|-------------------------|---------------|
| ACH1.3L | N50601624 | 1300       | 0 - 250                 | 17            |
| ACH3.3L | N50601626 | 3300       | 0 - 250                 | 28            |
| ACH6.6L | N50601628 | 6650       | 0 - 250                 | 64            |
| ACH10.0 | 192065646 | 10000      | 50 - 300                | 90            |

\*Per pair, up to an angle of 45° from the vertical

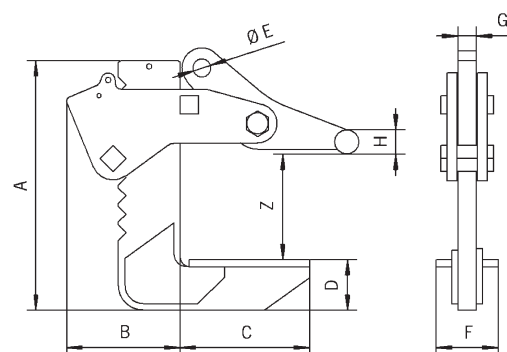

### Dimensions ACH

| Model   | ACH1.3L | ACH3.3L | ACH6.6L | ACH10.0 |
|---------|---------|---------|---------|---------|
| A, mm   | 298     | 321     | 405     | 495     |
| B, mm   | 122     | 130     | 185     | 210     |
| C, mm   | 160     | 160     | 210     | 240     |
| D, mm   | 41      | 50      | 82      | 100     |
| Ø E, mm | 20      | 23      | 30      | 40      |
| F, mm   | 80      | 80      | 100     | 120     |
| G, mm   | 20      | 25      | 30      | 50      |
| Ø H, mm | 25      | 25      | 40      | 40      |