

## TBG/TST Block grabs

Working load limit (WLL) 200 - 1000 kg


These block grabs are designed to transport any material with parallel surfaces that can withstand a clamping pressure twice as high as the weight of the load being lifted. The range offers jaw capacities from 0 - 1100mm. They are extremely easy and simple to use and make for safe lifting. The TBG has rubber lined jaws and the TST model has serrated steel jaws.

Product group: I4




## INFO

When using the models fitted with rubber protective lining, it is important that the surfaces are dry, clean and free of oil and grease.

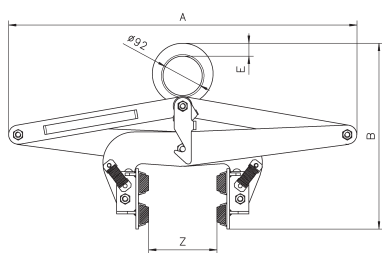

Grab with small jaw capacity

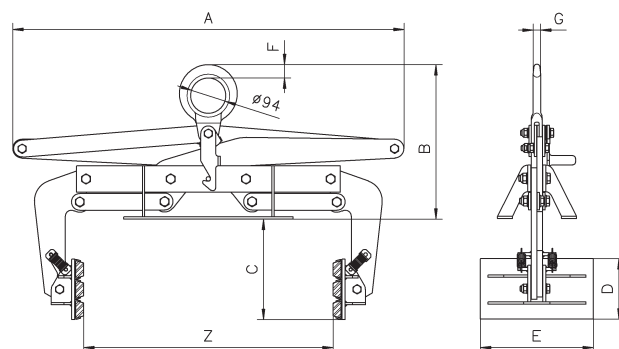

Grab with large jaw capacity

## Technical data

| Model        | Art.-No.<br>TBG rubber lined | Art.-No.<br>TST steel jaw | WLL<br>kg | Jaw capacity<br>mm | Weight<br>kg |
|--------------|------------------------------|---------------------------|-----------|--------------------|--------------|
| TBG/TST500S  | N52604009                    | N4300000396               | 500       | 0 - 150            | 27           |
| TBG/TST1000S | N52604010                    | N4300000392               | 1000      | 50 - 250           | 50           |
| TBG/TST200L  | N52604156                    | N4300000393               | 200       | 200 - 500          | 49           |
| TBG/TST300L  | N52604157                    | N4300000394               | 300       | 400 - 700          | 52           |
| TBG/TST500L  | N52604158                    | N4300000395               | 500       | 600 - 900          | 55           |
| TBG/TST1000L | N52604159                    | N4300000391               | 1000      | 800 - 1100         | 72           |