


Hack8 Reeveable Egg Link

All William Hackett Grade 8 lifting components comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

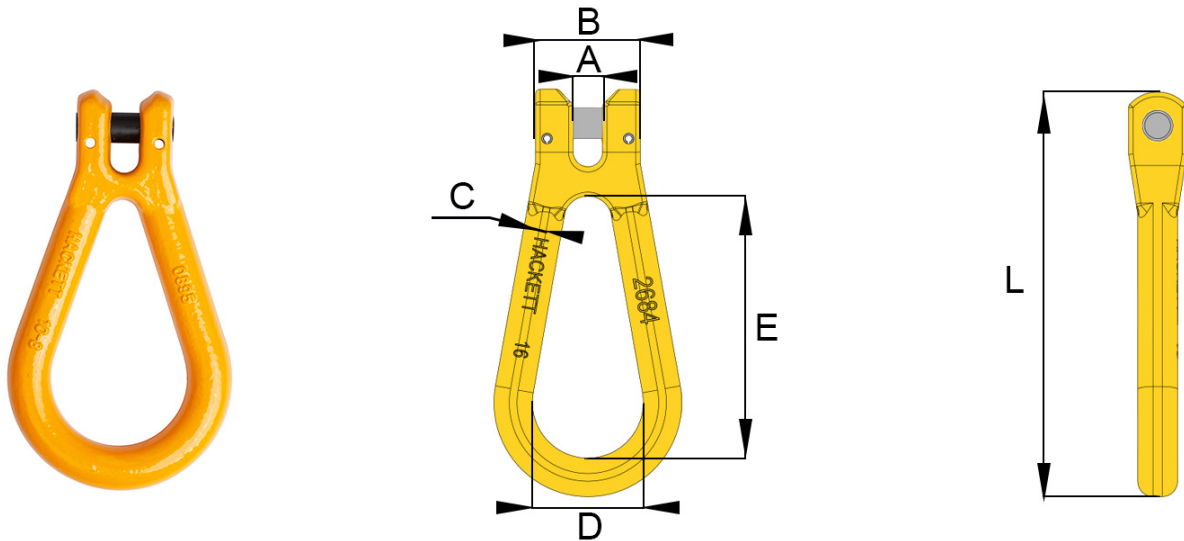

Metric Specifications

| Part Code | Chain Size mm | A mm | B mm | D mm | E mm | L mm | C mm | Box Qty. | WLL tonnes | Mass kg |
|-----------|---------------|------|------|------|-------|------|------|----------|------------|---------|
| 8-H07-08 | 7/8 | 10 | 32.8 | 45.0 | 87.0 | 139 | 4.0 | 35 | 2.00 | 0.53 |
| 8-H07-10 | 10 | 12 | 42.0 | 60.0 | 108.0 | 174 | 5.0 | 20 | 3.15 | 0.74 |
| 8-H07-13 | 13 | 15 | 58.0 | 66.5 | 137.5 | 228 | 6.5 | 10 | 5.30 | 1.80 |
| 8-H07-16 | 16 | 19 | 68.0 | 72.0 | 165.0 | 264 | 7.0 | 6 | 8.00 | 2.80 |

Imperial Specifications

| Part Code | Chain Size inch | A inch | B inch | D inch | E inch | L inch | C inch | Box Qty. | WLL lbs | Mass lbs |
|-----------|-----------------|--------|--------|--------|--------|--------|--------|----------|---------|----------|
| 8-H07-08 | 1/4 - 5/16 | 0.39 | 1.29 | 1.77 | 3.42 | 5.47 | 0.15 | 35 | 4500 | 1.16 |
| 8-H07-10 | 3/8 | 0.47 | 1.65 | 2.36 | 4.25 | 6.85 | 0.19 | 20 | 71000 | 1.63 |
| 8-H07-13 | 1/2 | 0.59 | 2.28 | 2.61 | 5.41 | 8.97 | 0.25 | 10 | 12000 | 3.96 |
| 8-H07-16 | 5/8 | 0.74 | 2.67 | 2.83 | 6.49 | 10.39 | 0.27 | 6 | 18100 | 6.17 |