

## Hack8 Clevis C Hook

The Hack8 clevis c hook is typically used in multi-leg chain sling lifting applications that involve chokage. This hook is capable of attachment directly onto chain thanks to its clevis attachment type. Manufactured from alloy steel, the Hack8 clevis c hook delivers an excellent balance between toughness and ductility.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.


**Product sizes:** available for chain sizes from 7/8mm to 16mm and with working load limits from 2.0 tonnes to 8.0 tonnes.

**Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

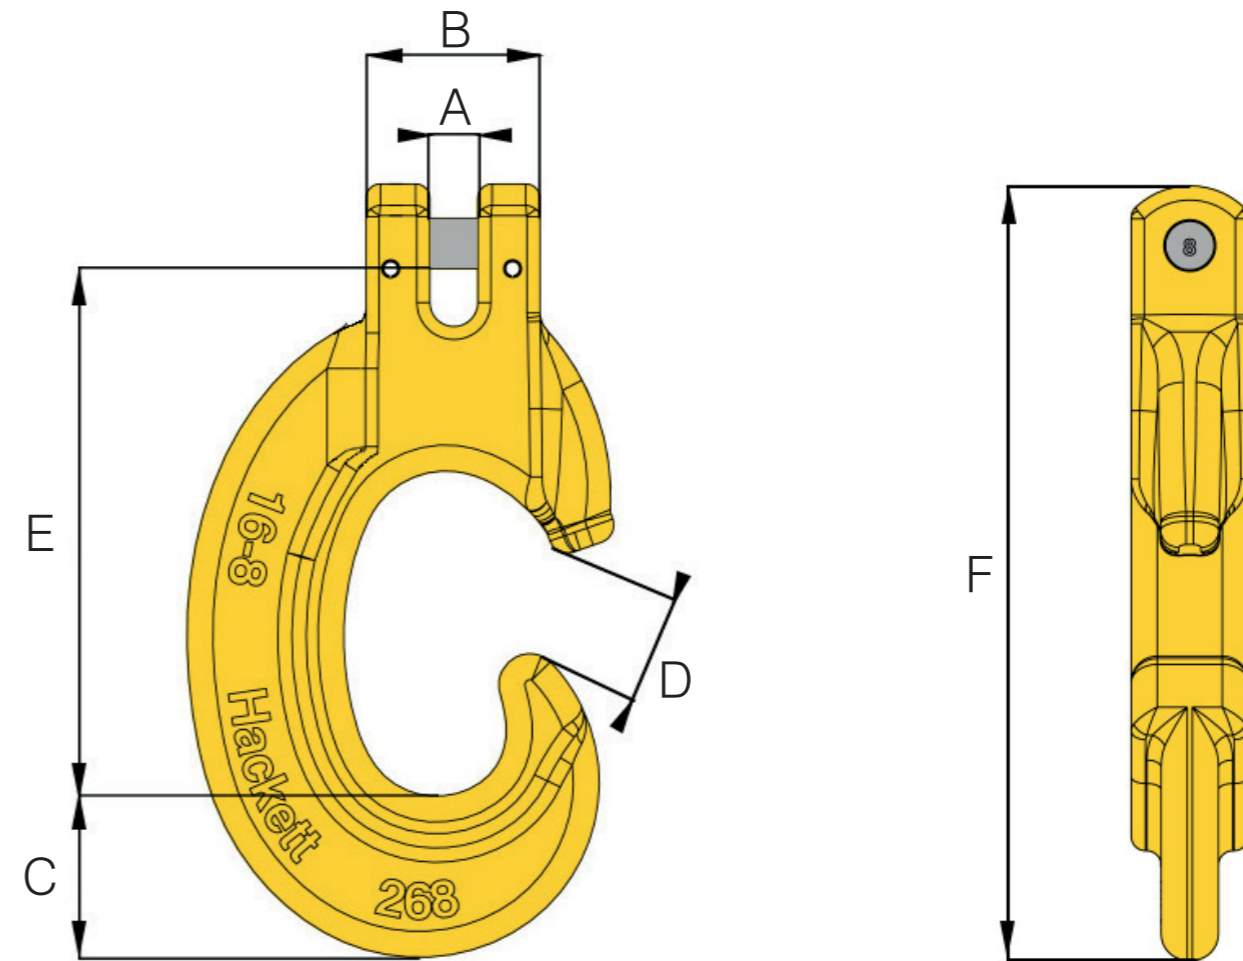

## Specifications

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	F mm	Box Qty.	WLL tonnes	Mass kg
8-H09-08	7/8	9.5	35.0	28.0	20.0	90.0	136.0	30	2.00	0.57
8-H09-10	10	13.0	46.0	39.5	29.5	127.0	189.0	15	3.15	1.40
8-H09-13	13	16.8	59.0	52.0	39.5	166.5	246.0	6	5.30	3.00
8-H09-16	16	18.5	72.0	59.0	46.5	206.0	298.0	3	8.00	5.40

## Hack8 Clevis C Hook

The Hack8 clevis c hook is typically used in multi-leg chain sling lifting applications that involve chokage. This hook is capable of attachment directly onto chain thanks to its clevis attachment type. Manufactured from alloy steel, the Hack8 clevis c hook delivers an excellent balance between toughness and ductility.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.


**Product sizes:** available for chain sizes from 9/32 - 5/16 inch to 5/8 inch and with working load limits from 4,500 lbs to 18,100 lbs.

**Temperature:** operational temperature range of -40°F to +392°F (-40°C to + 200°C) without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

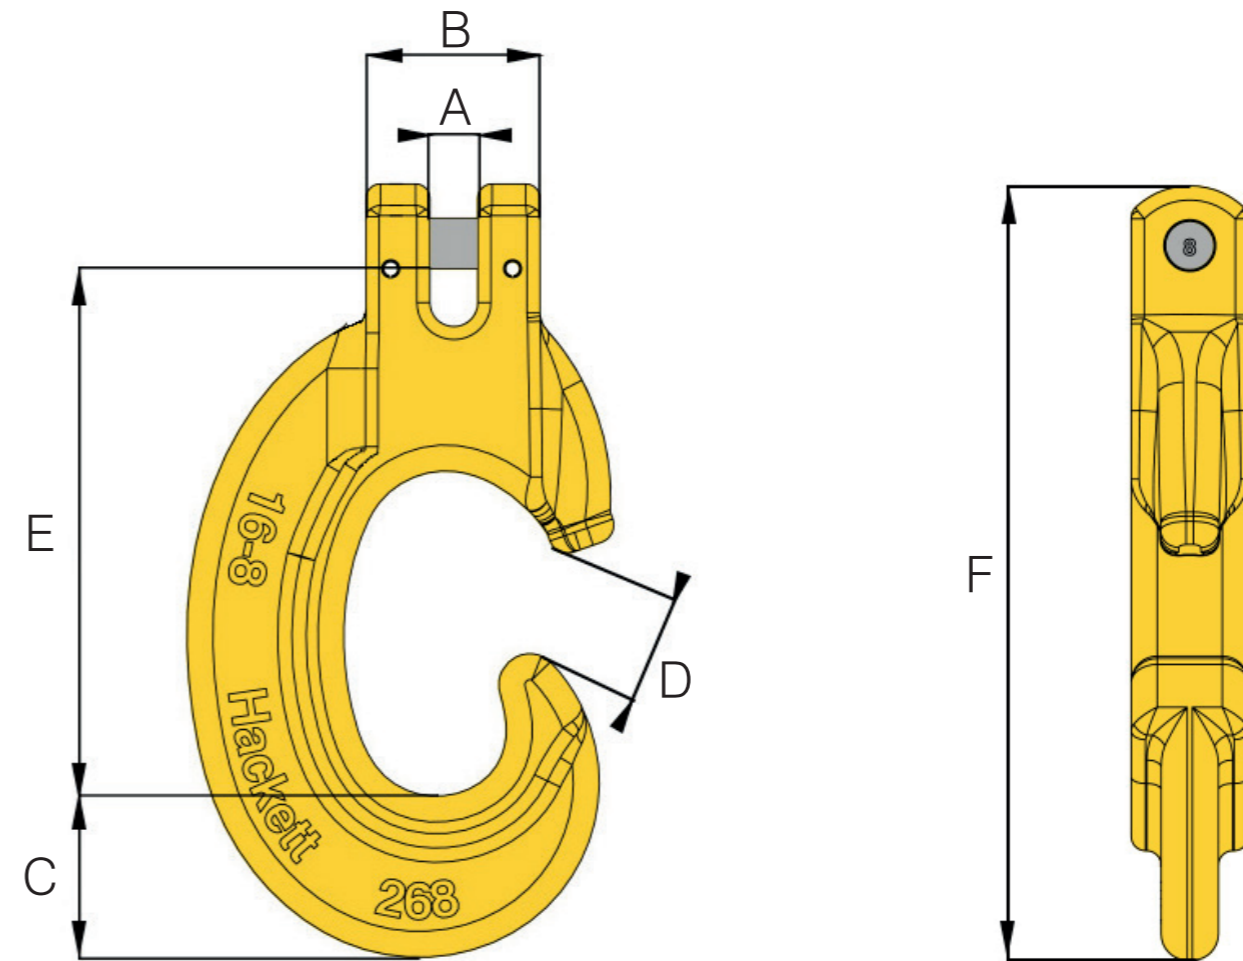

## Specifications

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	F inch	Box Qty.	WLL lbs	Mass lbs
8-H09-08	9/32 - 5/16	0.37	1.38	1.10	0.79	3.54	5.35	30	4500	1.26
8-H09-10	3/8	0.51	1.81	1.56	1.16	5.00	7.44	15	7100	3.09
8-H09-13	1/2	0.66	2.32	2.05	1.56	6.56	9.69	6	12000	6.61
8-H09-16	5/8	0.73	2.83	2.32	1.83	8.11	11.73	3	18100	11.91