

## Grade 10 Short Link Chain


**Mechanical properties in accordance with EN818-2 +25% and ASTM A391/A391M.**

**Chemical composition and dimensions conform to EN818-2.**

The Grade 10 chain is embossed with manufacturer's mark and grade (MA10) and class leading batch code traceability.

All sizes for the William Hackett Grade 10 are proof tested at manufacture to 2.5 times the given working load limit and have a range of diameters from 6mm – 32mm. The Hackett Grade 10 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

Surface Finish: Blue Painted.

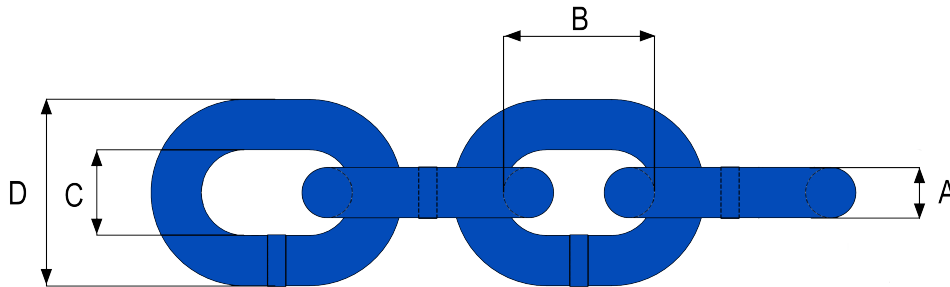

## METRIC SPECIFICATIONS

Part Code	Chain Size A mm (Nominal)	B mm (Nominal)	C mm (Minimum)	D mm (Maximum)	WLL tonnes	kgs per metre	Metres per drum
ASV.060.5	6	18	9.1	25.9	1.4	0.80	500
ASV.080.5	8	24	10.4	29.6	2.5	1.51	350
ASV.100.5	10	30	13.0	37.0	4.0	2.35	250
ASV.130.5	13	39	16.9	48.1	6.7	3.99	150
ASV.160.5	16	48	20.8	59.2	10.0	5.99	100
ASV.200.5	20	60	26.0	74.0	16.0	9.76	60
ASV.220.5	22	66	28.6	81.4	19.0	11.70	50
ASV.260.5	26	78	33.8	96.2	26.5	16.12	30
ASV.320.5	32	96	41.6	118.0	40.0	24.80	25

# IMPERIAL SPECIFICATIONS

Part Code	Chain Size A inch (Nominal)	B inch (Nominal)	C inch (Minimim)	D inch (Maximum)	WLL lbs	lbs per ft	feet per drum
ASV.060.5	7/32	0.70	0.35	1.02	3000	0.54	1640
ASV.080.5	5/16	0.90	0.40	1.17	5700	1.00	1148
ASV.100.5	3/10	1.18	0.51	1.46	8800	1.58	820
ASV.130.5	1/2	1.54	0.66	1.90	15000	2.68	492
ASV.160.5	5/8	1.89	0.82	2.33	22600	4.02	328
ASV.200.5	3/4	2.36	1.02	2.91	35300	6.56	196
ASV.220.5	7/8	2.59	1.12	3.20	42700	7.86	164
ASV.260.5	1	3.07	1.33	3.79	59600	10.83	98
ASV.320.5	1-1/4	3.78	1.63	4.65	90400	16.66	82