


Hack8 Barrel Hook

The Hack8 barrel hook is specifically designed for use in barrel sling assemblies. Manufactured from alloy steel, the Hack8 barrel hook delivers an excellent balance between toughness and ductility.

- Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.
- Product sizes:** available for chain size 7/8mm and with a working load limit of 2.0 tonnes.
- Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.
- Material:** alloy steel.
- Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:** 4 : 1.

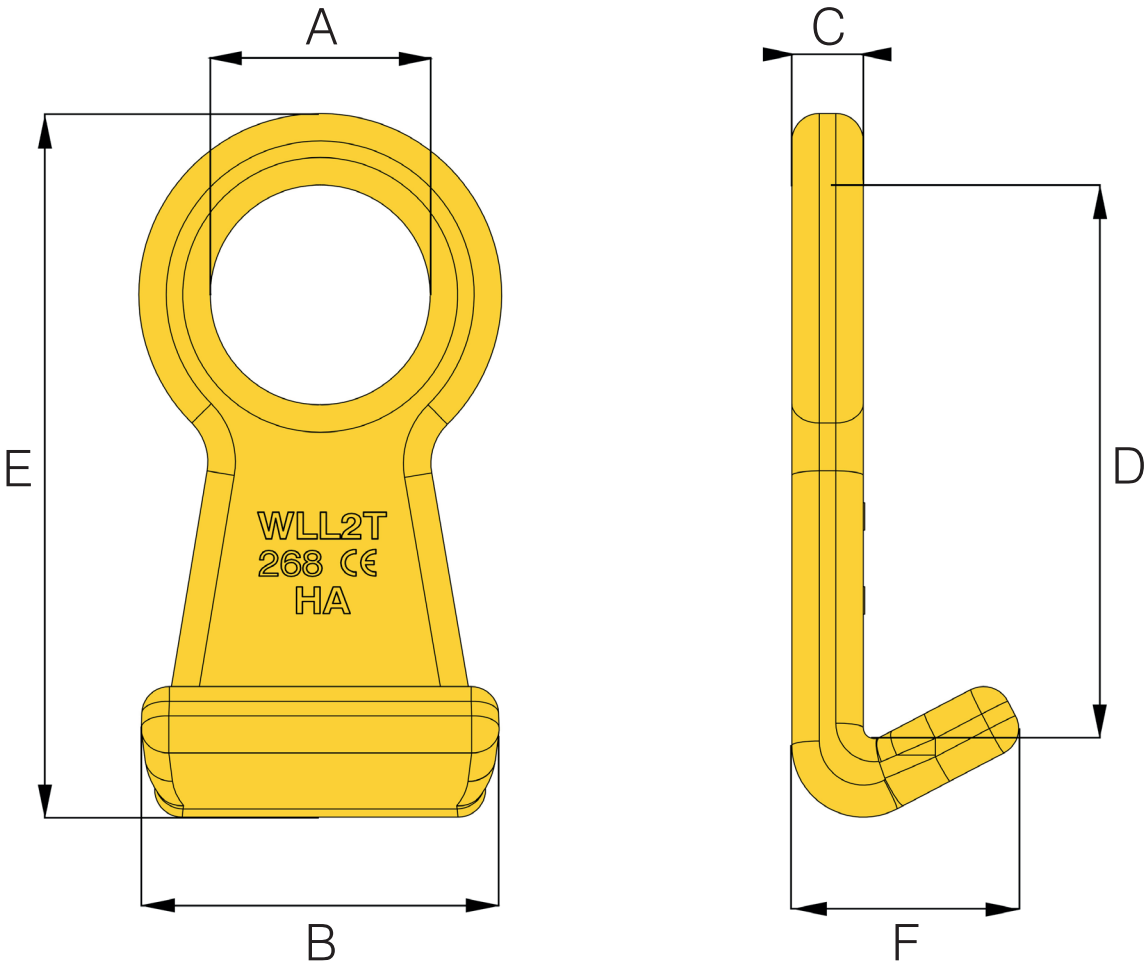


Specifications

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	F mm	Box Qty.	WLL tonnes	Mass kg
8-H18-08	7/8	40.0	50.0	13.0	102.0	128.0	43.0	15	2.00	0.55

Hack8 Barrel Hook

The Hack8 barrel hook is specifically designed for use in barrel sling assemblies. Manufactured from alloy steel, the Hack8 barrel hook delivers an excellent balance between toughness and ductility.

- Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.
- Product sizes:** available for chain size 9/32 - 5/16 inch and with a working load limit of 4,500 lbs.
- Temperature:** operational temperature range of -40°F to +392°F (-40°C to + 200°C) without reduction in working load limit.
- Material:** alloy steel.
- Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:** 4 : 1.

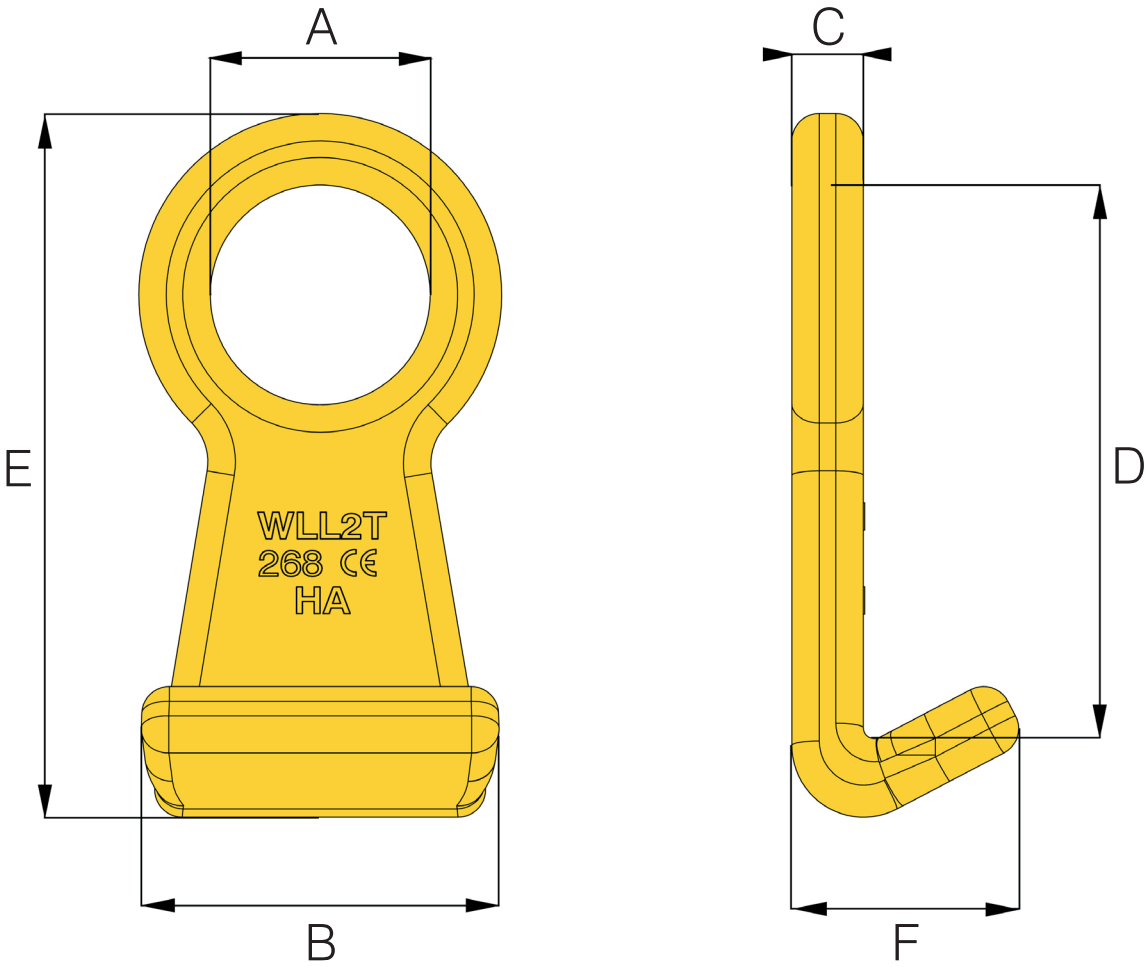

Specifications

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	F inch	Box Qty.	WLL lbs	Mass lbs
8-H18-08	9/32 - 5/16	1.57	1.97	0.51	4.02	5.04	1.69	15	4500	1.21