


G-213



- Forged, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Hot-dip galvanized.
- Sizes 3/8 inch and below are mechanically galvanized.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are Quenched & Tempered and can meet DNV impact requirements of 42 Joules (31 ft-lb) at -20° C (-4° F).
- G-213 Round pin anchor shackles meet the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 1, except for those provisions required of the contractor.
- **DO NOT SIDE LOAD ROUND PIN SHACKLES.**
- Look for the Red Pin®... the mark of genuine Crosby quality.

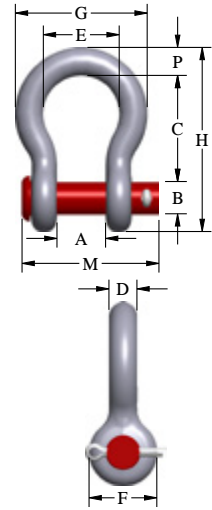

G-213 Round Pin Anchor Shackles

Nominal Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)													Replacement Pin Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	E	F	G	H	M	P		
1/4	1/2	1018017	.06	12	1.5	8	29	1.5	6	20	16	32	47	34	6	-	
5/16	3/4	1018035	.08	14	1.5	10	31	1.5	8	21	19	37	53	41	8	-	
3/8	1	1018053	.13	17	1.5	11	37	3.3	10	26	23	46	64	47	10	-	
7/16	1 1/2	1018071	.17	19	1.5	13	43	3.3	11	30	27	52	74	54	11	-	
1/2	2	1018099	.32	21	1.5	16	48	3.3	13	33	30	59	83	60	13	-	
5/8	3 1/4	1018115	.68	27	1.5	20	60	3.3	16	43	38	74	106	74	18	-	
3/4	4 3/4	1018133	1.05	32	1.5	22	71	6.4	19	51	46	89	126	87	21	-	
7/8	6 1/2	1018151	1.58	37	1.5	26	84	6.4	22	58	53	103	148	97	25	-	
1	8 1/2	1018179	2.27	43	1.5	30	95	6.4	25	68	60	119	167	115	27	-	
1-1/8	9 1/2	1018197	3.16	46	1.5	32	108	6.4	30	74	68	131	190	130	32	1082232	
1-1/4	12	1018213	4.42	52	1.5	36	119	6.4	33	83	76	146	210	140	35	1082250	
1-3/8	13 1/2	1018231	6.01	57	3.3	39	133	6.4	36	92	84	162	233	156	38	1082278	
1-1/2	17	1018259	7.82	60	3.3	42	146	6.4	39	99	92	176	254	165	41	1082296	
1-3/4	25	1018277	13.4	73	3.3	52	178	6.4	47	127	106	224	313	197	57	1082312	
2	35	1018295	20.8	83	3.3	58	197	6.4	53	146	122	258	348	222	61	1082330	

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

