

Yalelift 360

ARCTIC EDITION

Hand chain hoist

Capacity 500 - 20000 kg

As with the Yalelift 360, we are also introducing the Yale UNOplus Series A in ARCTIC EDITION, a hand lever hoist for extreme applications.

It was ensured that all functions even under extremes temperatures work satisfactory. Materials used for this purpose as well as lubricants adapted to the requirements and tested and certified in complex low-temperature test procedures, which means that the user can work safely and productively with the YaleUNOplus Series A, allows temperatures down to -40°C.

In addition to static tests, dynamic low-temperature tests were also carried out to rule out malfunctions and material failure.

We can confirm the user's suitability with a certificate!



EXPERIENCE THE
ADVANTAGE OF 360°



INFO

Standard hoists according to EN13157
(cranes - safety - hand operated cranes)

5.1.12 Temperature

Hand chain blocks and their components shall be capable of operating within an ambient temperature range of -10°C to +50°C unless another temperature range is agreed between the manufacturer and the purchaser. Standard hoist products from CMCO are suitable for a temperature range of -20°C to +50°C!




Technical data Yalelift 360 ARCTIC EDITION


Model	Art-No.	Capacity kg	Number of chain falls	Chain dimensions d x p in mm/ design	Lift per 1 m hand chain overhaul mm	Handle pull at WLL daN	Weight at standard lift (3 m) kg
YL 500 ARCTIC EDITION	192099205	500	1	5 x 15 - T	33	21	9
YL 1000 ARCTIC EDITION	192099206	1000	1	6 x 18 - T	20	30	13
YL 2000 ARCTIC EDITION	192099207	2000	1	8 x 24 - T	14	32	21
YL 3000 ARCTIC EDITION	192099208	3000	1	10 x 30 - V	12	38	34
YL 5000 ARCTIC EDITION	192099209	5000	2	10 x 30 - T	6	34	48
YL 10000 ARCTIC EDITION	192099210	10000	3	10 x 30 - V	4	44	71
YL 20000 ARCTIC EDITION	192099211	20000	6	10 x 30 - V	2	2 x 44	196

Dimensions Yalelift 360 ARCTIC EDITION


Model	YL 500 ARCTIC EDITION	YL 1000 ARCTIC EDITION	YL 2000 ARCTIC EDITION	YL 3000 ARCTIC EDITION	YL 5000 ARCTIC EDITION	YL 10000 ARCTIC EDITION	YL 20000 ARCTIC EDITION
A min., mm	300	335	395	520	654	825	1065
B, mm	17	22	30	38	45	68	85
C, mm	24	29	35	40	47	68	64
D, mm	133	156	182	220	220	220	303
E, mm	148	175	203	250	250	383	555
F, mm	148	167	194	219	219	219	250
G, mm	139	164	192	225	242	326	391
H, mm	206	242	283	335	352	436	501
I, mm	24	24	31	34	21	136	-
K, mm	61	70	83	95	95	95	396
L, mm	87	97	111	124	124	124	125
M, mm	110	125	156	178	285	401	471
N, mm	14	19	22	30	37	50	56

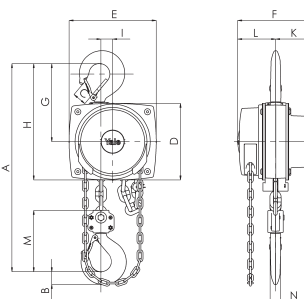


Yalelift 360, 500 - 3000 kg, single fall

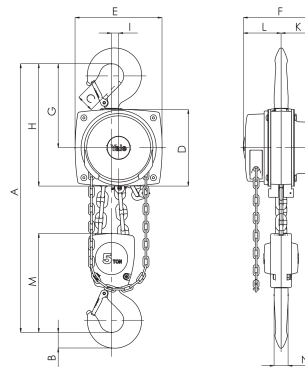

Yalelift 360, 5000 kg, double fall

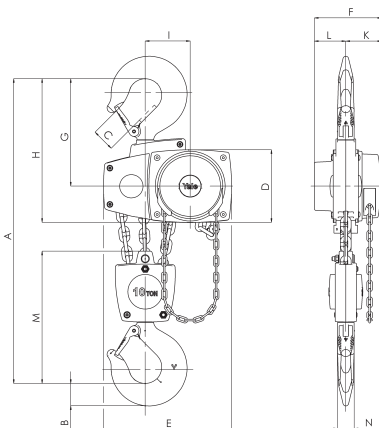

Yalelift 360, 10000 kg, three falls

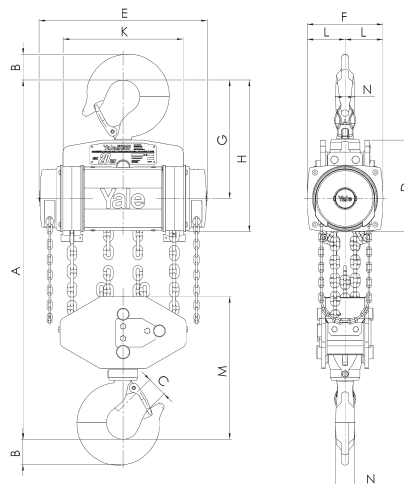

Yalelift 360, 20000 kg, six falls