



SLINGCO UTILITY PRODUCTS

CABLE INSTALLATION AND SUPPORT
MADE A WHOLE LOT EASIER

A GLOBAL BUSINESS BUILT ON QUALITY, INNOVATION, SERVICE ...AND REAL FAMILY TIES



We've been living and breathing manufacturing for as long as we can remember. You can blame our Dad for that!

He founded Slingco more than 40 years ago. Since then, we've grown up and so has the company, evolving into an expert design and manufacturing operation, producing high quality tools for cable and conductor installation - products that are renowned for high performance in quality-critical applications.

Slingco America is based in Atlanta, Georgia, but you'll find our products around the world, making heavy-duty cable installation and support a whole lot easier for people working in industries as varied as public

utilities, overhead line construction, oil and gas, marine and offshore, civil engineering, aerospace, transport, the military, performing arts, vehicle building, construction, and more.

You can't make mistakes when you're dealing with products like ours. Too much depends on them. That's why we're obsessive about quality and innovation in design and manufacturing, and why nothing leaves our hands that isn't 100% dependable.

Because we understand exactly what your operation needs, we also know cost is a factor. We keep our prices realistic and hold a vast range of stock for fast – even same day – delivery.

We're brothers, partners, and the driving force behind Slingco, but we're only a small part of the whole picture. We've got a fantastic team of skilled people who share our obsession with quality and great service. We're proud of every one of them.

Together, we're going to carry on developing outstanding products. We're going to carry on getting them out to you in record time. And we're going to carry on being the sort of company it's a pleasure to deal with.



MATT DYKINS
PRESIDENT, SLINGCO AMERICA



NICK DYKINS
CEO, SLINGCO LIMITED



CABLE GRIPS AND ACCESSORIES

A Type - High Strength Cable Grip (Heavy Duty)	5
Anti Rotational Device	8
Conduit Riser Cable Grip - Stainless Steel	16
Connectors: 90°, Rope To Rope, Rope To Swivel	7
Double Eye Closed Mesh Cable Support Grip	11
Double Eye Split Mesh Lace Closing Cable Support Grip	11
Double Eye Split Mesh Rod Closing Cable Support Grip	11
Extended Thimble Eye Heavy Duty Double Weave Stainless Steel Cable Grip	17
Fast Banding	9
Feed Tube	5
Heavy Duty Support Grips - Single Eye	14
Heavy Duty Support Grips - Single Eye Lace-Up	14
Heavy Duty Support Grips - Single Eye Rod Closing	14
Heavy Duty Support Grips - Double Eye	15
Heavy Duty Support Grips - Double Eye Lace-Up	15
Heavy Duty Support Grips - Double Eye Rod Closing	15
Hooked Eye Riser Pole Cable Support Grip	16
Line Pulling Swivel - Bright Zinc Plated Steel	6
Line Pulling Swivel - Galvanized	6
MU Type - High Strength Cable Grip (Heavy-Medium Duty)	5
Offset Eye Closed Mesh Cable Support Grip	12
Offset Eye Split Mesh Lace Closing Cable Support Grip	12
Offset Eye Split Mesh Rod Closing Cable Support Grip	12
R Type - Rotating Eye Multi-Weave Cable Grip (Underground)	8
RT Type - Rotating Eye Double Weave Cable Grip (Underground)	9
Single Eye Closed Mesh Cable Support Grip	10
Single Eye Split Mesh Lace Closing Cable Support Grip	10
Single Eye Split Mesh Rod Closing Cable Support Grip	10
Universal Eye Closed Mesh Cable Support Grip	13
Universal Eye Split Mesh Lace Closing Cable Support Grip	13
Universal Eye Split Mesh Rod Closing Cable Support Grip	13
Ultra-Flex Single Eye Double Weave Non-Metallic Cable Grip	7
Wind Turbine Support Grip - Heavy Duty Thimble Offset Eye	17

CATCHBLOCK

Bollard Clamp	20
Catchblock Overhead Line Catenary Roller	18-19
Conductor Replacement Roller	21
Remotely Operated Cable Tug Unit	20
Roblon High Voltage Pulling Rope	21

CONDUCTOR SUPPORT

Fiberglass Extension Arm	22
Jib Head Adapter	22

GROUNDING AND JUMPER

35kv Jumper Clamp	23
Grounding Clamps	23

CUTTING TOOLS

Bolt Cutters	24
Ratchet Cutters	24

CRIMPING TOOLS

Mechanical Crimping Tool	25
60 Ton Hydraulic Crimping Tool	26
100 Ton Hydraulic Crimping Tool	27

LIVE LINE TOOLS AND ACCESSORIES

Glove And Sleeve Bags	31
Isolating Link And Spiral Link Sticks	29
Rubber Insulating Blankets	29
Rubber Blanket Accessories	30
Shotgun Sticks	28
Universal and Switch Head Sticks	28

POLE LINE HARDWARE

Heavy Duty Banding	32
Hold Down Weights	33
Light Duty Banding	33
Pole Band System	32
Pole Line Suspension Clamps	34
Pole Staples	33

POLE SETTING AND GROUND MATERIALS

10k Drive Wrench Assembly	36
Anchor Buster	35
Anchor Rod Pulling Eye	35
Dirt Tarps	39
Pole Light Kit	35
Pole Puller	38
Pole Stand	39

RIGGING AND STRINGING

2k Strap Hoist	44
3k Strap Hoist	45
4k Strap Hoist	45
Distribution Stringing Blocks and Accessories	40-41
Guy Wire Dispenser	42
Hand Line Tools	43
Reel Lifter	43
Triplex Dispenser	42

WARNING


Cancer and Reproductive Harm www.P65Warnings.ca.gov

Some of the products in this catalog are subject to Prop65 health warnings. For details, please contact us.

PLEASE NOTE: While every effort has been made to ensure accuracy of all content in this catalog, please confirm with your Slingco contact any critical information before purchase.

Cable Grips and Accessories


High-strength grips, swivels, and accessories for stringing, trench cabling, and utility maintenance.

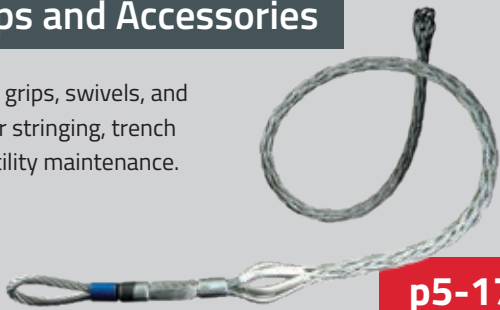

p5-17

CatchBlock


Two-rope catenary roller system enabling safe conductor recovery without accessing property or infrastructure beneath transmission lines.



p18-21

Conductor Support

Fiberglass extension arms for moving conductors to create working clearance in congested areas or temporary aid for replacing insulators and existing conductors.

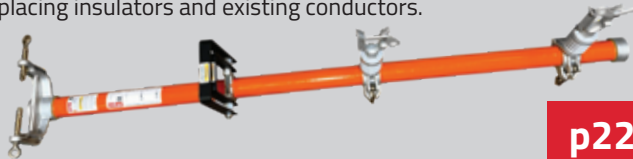

p22

Grounding and Jumper

Clamps for a wide variety of electrical grounding in utility and industrial settings. Jumpers to bypass work areas when equipment is under repair or being upgraded.



p23

Cutting Tools

Tough, ergonomic cutting tools designed for comfort, leverage, and dependable performance on the job.



p24-25

Crimping Tools

Hydraulic and Manual crimpers that secure sleeves and lugs on ACSR and ACAR cables with utility-standard dies.



p26-27

Live Line Tools and Accessories

Hot sticks, isolating link sticks, and safety gear providing insulation and protection in high-voltage environments.



p28-31

Pole Line Hardware

Light and heavy-duty banding systems that securely fasten cables and hardware to poles.



p32-34

Pole Setting and Ground Materials

Durable solutions for pole framing, anchoring, installation, and removal—built for safety and efficiency.



p35-39

Rigging and Stringing

Stringing blocks, brackets, dispensers, and hoists that streamline pulls and speed up installations.




p40-45

A TYPE - HIGH STRENGTH CABLE GRIP (HEAVY DUTY)



The strongest grip we produce; can be used for metal wire and synthetic rope pulls. Perfect for overhead transmission and distribution line pulling or any applications with heavy load ratings, e.g. gas, electric railroad, rigging lines and construction pulls. When pulling synthetic rope use a Slingco Feed Tube (see below) to make rope insertion a breeze. To avoid the effects of torsion a line pulling swivel that rotates under load should be used. Use A-Type grips when pulling Guy or Static wire. Galvanized Steel and color coded for ease of identification.

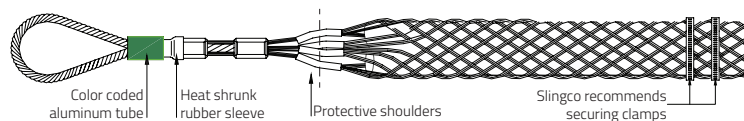

Slingco Part No	Color Code	Rope Diameter Range		Conductor Diameter		Overall Length		Lattice Length		Approx. Break Load	
		in	mm	in	mm	in	mm	in	mm	lb	kg
ZCS1799	Black	0.25 - 0.65	6-16	0.19 - 0.40	5-10	38	965	26	665	7,000	3,180
ZCS3020	Purple	0.30 - 0.40	7.5-10	0.25 - 0.40	6-10	42	1,067	30	760	10,000	4,530
ZCS1800	Dark Green	0.50 - 0.90	13-23	0.38 - 0.63	9.7-16	52	1,326	38	966	14,000	6,360
ZCS3522	Grey	0.44 - 0.90	11-23	0.44 - 0.63	11-16	106	2,685	93	2,355	20,000	9,072
ZCS1801	Red	0.75 - 1.10	19-28	0.63 - 0.88	16-22	69	1,760	53	1,355	20,000	9,072
ZCS5543	Brown	0.75 - 1.10	19-28	0.63 - 0.88	16-22	81	2,060	62	1,579	30,700	13,925
ZCS1802	Blue	1.00 - 1.50	25-38	0.88 - 1.13	22-29	80	2,032	61	1,549	30,700	13,955
ZCS1803	Yellow	1.25 - 1.70	32-43	1.13 - 1.38	29-35	105	2,660	82	2,072	47,000	21,360
ZCS1804	Aluminum	1.50 - 2.10	38-53	1.38 - 1.90	35-50	119	3,020	89	2,265	67,000	30,455

Contact Slingco if you require high strength pulling grips for conductor sizes greater than 1.90".

FEED TUBE


Due to the tight construction of the A Type cable grip, we recommend using the Slingco Feed Tube when inserting cable or rope into the grips. For ease of use, our feed tubes are color-coded to match the A Type Cable grip.



Slingco part no.	Tube to fit rope diameter inches (mm)	Feed tube length inches (mm)	Matches Slingco Cable Grip part no.	Cable grip color
FTU1890	0.25 - 0.65 (6 - 16)	29 (730)	ZCS1799, ZCS3020	Black
FTU1891	0.50 - 0.90 (13 - 23)	41 (1,041)	ZCS1800, ZCS3522	Dark green
FTU1892	0.75 - 1.10 (19 - 28)	53 (1,356)	ZCS1801	Red
FTU1893	1.00 - 1.50 (25 - 38)	69 (1,743)	ZCS1802	Blue
FTU1894	1.25 - 1.70 (32 - 43)	85 (2,156)	ZCS1803	Yellow
FTU1895	1.50 - 2.10 (38 - 53)	98 (2,498)	ZCS1804	Aluminum


MU TYPE - HIGH STRENGTH CABLE GRIP (HEAVY-MEDIUM DUTY)

This grip's multi-weave construction is ideal for heavy loads. MU cable grips are color coded for ease of identification. Perfect for stringing overhead transmission and distribution lines and heavy-load pulls of any kind. Use with bare or insulated cable, conductor or wire. The flexible eye connects with Slingco line pulling swivels for trouble free pulling applications. Recommend use of A-Type grips when pulling Guy or Static wire. Made of Galvanized Steel.



Slingco Part No	Color Code	Range		Lattice Length		Approx. Break Load	
		in	mm	in	mm	lb	kg
ZCS1710	Dark Green	0.25 - 0.50	6-13	28	720	7,000	3,170
ZCS1711	Brown	0.50 - 0.75	13-19	39	978	10,500	4,760
ZCS1712	Light Blue	0.75 - 1.00	19-25	43	1,092	14,100	6,395
ZCS1713	Gold	1.00 - 1.25	25-32	58	1,470	25,000	11,340
ZCS1714	Black	1.25 - 1.50	32-38	51	1,291	31,000	14,065
ZCS1715	Red	1.50 - 1.75	38-44	68	1,739	31,000	14,065
ZCS1716	Dark Blue	1.75 - 2.25	44-57	69	1,747	49,000	22,230
ZCS1750	Yellow	2.00 - 2.50	51-63	54	1,370	49,000	22,230
ZCS1751	Orange	2.50 - 3.00	63-76	52	1,311	49,000	22,230
ZCS1752	Aluminum	3.00 - 3.50	76-89	53	1,342	49,000	22,230
ZCS1753	Light Green	3.50 - 4.00	89-102	53	1,351	49,000	22,230

LINE PULLING SWIVEL - BRIGHT ZINC PLATED STEEL

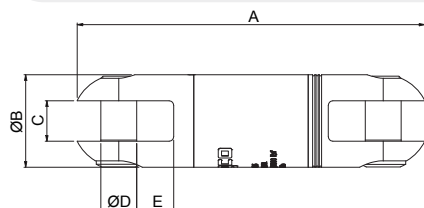

Swivels designed for use in stringing high tension wires for electrical transmission and distribution. Swivels are important in pulling when the lines develop torsion during installation. Swivels will release torque and prevent it from reaching dangerous levels, which can cause damage to the cable. All swivels are stringently quality tested and inspected to ensure optimum performance and reliability.

Slingco part no.	Safe working load (lb)		A (in)	Ø B (in)	C (in)	Ø D Pin (in)	E Recess (in)	Weight (lb)
	3:1 FOS	5:1 FOS						
ZSW2091	2,250	1,350	3.39	0.87	0.39	0.31	0.39	0.43
ZSW2092	3,500	2,100	3.98	0.98	0.43	0.39	0.43	0.56
ZSW2093	5,000	3,000	4.96	1.26	0.55	0.39	0.55	1.13
ZSW2094	7,000	4,200	5.22	1.38	0.55	0.5	0.54	1.44
ZSW2096	10,000	6,000	6.1	1.62	0.71	0.63	0.65	2.35
ZSW2097	15,000	9,000	7.34	2.09	0.79	0.71	0.83	4.59


Note: 3:1 factor of safety and 5:1 factor of safety provided for reference only

Swivel and MU & R Type Cable Grip match-up

Approx. breaking strength of cable grip (lb)	MU & R Type cable grip color code	Size range O.D. (in)	Recommended swivel	Safe working load of swivel (lb) 3:1 FOS	Revolving Eye	Flexible Eye MU
7,000	Dark green	0.25 - 0.50	ZSW2092	3,500	ZCS2177	ZCS1710
10,500	Brown	0.50 - 0.75	ZSW2093	5,000	ZCS2178	ZCS1711
14,100	Light blue	0.75 - 1.00	ZSW2093	5,000	ZCS2179	ZCS1712
25,000	Gold	1.00 - 1.25	ZSW2096	10,000	ZCS2180	ZCS1713
31,000	Black	1.25 - 1.50	ZSW2096	10,000	ZCS2181	ZCS1714
31,000	Red	1.50 - 1.75	ZSW2096	10,000	ZCS2182	ZCS1715
43,000-48,000†	Dark blue	1.75 - 2.25	ZSW2097	15,000	ZSC2183*	ZCS1716†

Note: The above is intended as a rough guide. The recommended working load should be determined by the competent person(s) using the cable grip and/or Slingco swivel.

LINE PULLING SWIVEL - GALVANIZED

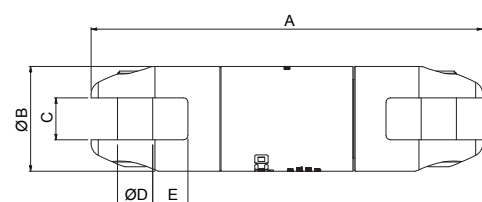

Slingco Line Swivels are designed to the highest specifications for underground and overhead pulling applications. All swivels are stringently quality tested and inspected to ensure optimum reliability and performance.

Slingco part no.	Safe working load (lb)		A Length (in)	Ø B (in)	C (in)	Ø D Pin (in)	E Recess (in)	Weight (lb)
	3:1 FOS	5:1 FOS						
ZSW2649	4,000	2,400	4.74	1.26	0.61	0.52	0.37	1.01
ZSW2929	8,000	4,800	5.38	1.5	0.63	0.61	0.43	1.75
ZSW6122	10,000	6,000	7	1.87	0.75	0.63	0.63	3.72
ZSW6123	16,000	9,600	10.2	2.44	1	1.12	0.87	9.19
ZSW2857	30,000	18,000	11.13	2.5	1	1.13	0.87	10.44

Note: 3:1 factor of safety and 5:1 factor of safety provided for reference only

Swivel or Connector Model	ZSW2091 ZSW6554	ZSW2092	ZSW2093 ZSW6555	ZSW2094	ZSW6122	ZSW2096	ZSW2097	ZSW2929	ZSW2649	ZSW2857	ZSW6123	ZSW6556	ZSW6557 ZSW6558 ZSW6559 ZSW6560
Replacement Pin (HEX)	SWI2859	SWI2810	SWI2339	SWI2341	SWI2343	SWI4079	SWI2344	SWI2801	SWI2648	SWI2748	SWI5184	SWI5309	SWI5310

SAFETY NOTE: All Slingco Line Pulling Swivels are designed for straight line pulling and will not support side loads as would be encountered traveling over a bull wheel. Swivel selection should be based on pulling line diameter, grip size, opening dimensions, pin sizes, working load, and sheave groove diameter. Swivels are not designed for general lifting

ULTRA-FLEX SINGLE EYE DOUBLE WEAVE NON-METALLIC CABLE GRIP




Slingco Single eye Double Weave non-metallic aramid grips are perfect for supporting power cables in salt water and wastewater applications. These grips are highly resistant to corrosion and salt.

Slingco Part No	Range		Color code	Approx. Break Load	
	in	mm		lb	kg
ULTRA-FLEX SINGLE EYE DOUBLE WEAVE NON-METALLIC CABLE GRIP					
ZCS09336	0.63 - 0.75	16 - 19	Yellow	5,000	2,267
ZCS09337	0.75 - 1.00	19 - 25	Red	6,000	2,721
ZCS09338	1.00 - 1.25	25 - 32	Blue	6,000	2,721
ZCS09339	1.25 - 1.50	32 - 38	White	6,000	2,721

CONNECTORS: 90°, ROPE TO ROPE, ROPE TO SWIVEL

Use to connect rope, swivels and other objects. With high strength pins and smooth rollers you can safely connect rope without fear of fraying or damage. Use the convenient 90° connectors to link wire and other non-rope items. Connectors have high strength hex pins. The Rope to Rope connector has two rollers to protect rope from becoming frayed.

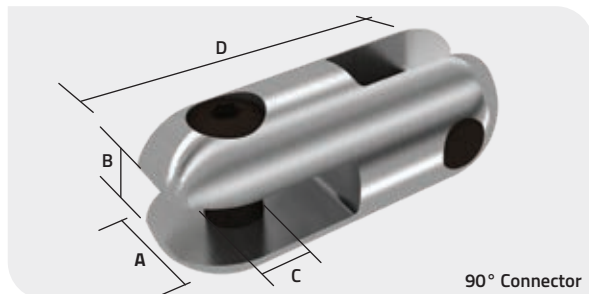

90° Connector

90° Connector

Slingco part no.	Safe working load lb (kg)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	Weight lb (kg)
ZSW6554	2,500 (1,134)	$\frac{7}{8}$ (22)	$\frac{3}{8}$ (9.6)	$\frac{5}{16}$ (8)	$2\frac{1}{8}$ (54.0)	0.17 (0.08)
ZSW6555	5,000 (2,240)	$1\frac{1}{4}$ (31.8)	$\frac{17}{32}$ (13.5)	$\frac{13}{32}$ (10)	$2\frac{7}{8}$ (73.0)	0.46 (0.21)
ZSW6556	9,000 (4,030)	$1\frac{1}{2}$ (38.1)	$\frac{19}{32}$ (15)	$1\frac{1}{2}$ (12.5)	$3\frac{3}{8}$ (86)	0.73 (0.33)
ZSW6557	15,000 (6,800)	2 (50.8)	$\frac{25}{32}$ (20)	$1\frac{11}{16}$ (18.0)	$4\frac{9}{16}$ (116)	2.00 (0.91)


Rope to Rope Connector

Slingco part no.	Safe working load lb (kg)	Max rope dia. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	Weight lb (kg)
ZSW6558	15,000 (6,800)	$\frac{7}{8}$ (22.2)	2 (50.8)	$\frac{15}{16}$ (24)	$\frac{11}{16}$ (18)	$5\frac{1}{2}$ (140)	2.70 (1.23)


Rope to Swivel Connector

Slingco part no.	Safe working load lb (kg)	Max rope dia. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	Weight lb (kg)
ZSW6559	7,000 (3,170)	$\frac{7}{8}$ (22.2)	2 (50.8)	$\frac{15}{16}$ (24)	$\frac{11}{16}$ (18)	$5\frac{5}{16}$ (135)	$\frac{1}{2}$ (12.7)	$\frac{17}{32}$ (13.5)	2.20 (1.00)
ZSW6560	15,000 (6,800)	$\frac{7}{8}$ (22.2)	2 (50.8)	$\frac{15}{16}$ (24)	$\frac{11}{16}$ (18)	$5\frac{3}{8}$ (137)	$2\frac{1}{32}$ (16.7)	$\frac{3}{4}$ (18)	2.50 (1.13)

Safe working load based upon 3:1 factor of safety.



Rope to Rope



Rope to Swivel

**Built by people who get it.
Designed for people who live it.**

Products for cable and conductor installation, support and protection

slingco

SAME DAY SHIPPING · NATIONAL DISTRIBUTOR NETWORK · HUGE INVENTORY



CALL US TOLL FREE AT 888 685 9478


ANTI ROTATIONAL DEVICE



The device prevents the cable from twisting as it travels over pulling blocks. Left uncontrolled, the optical cable's delicate glass fibers could be permanently damaged during installation.

- Stops cables from twisting as they pass over pulling blocks
- For use with fiber optic and OPGW cable
- Prevents irreparable damage to delicate fiber optics caused by cable twists during installation
- The ARD has weighted attachments that hang down while stringing, keeping the ARD vertical to stop cable rotation
- ARD attachments collapse in line, enabling them to travel easily over pulling blocks
- The ARD includes one 5,000 lb swivel attached to the head of the device

Specification	
Slingco Part No.	ZAD3799
Overall Length	29' Approx.
Working load (@3:1 Safety Factor)	5,000 lbs
Length of Attachments	8' Approx.
Weight of Attachment	14 lbs each Approx.

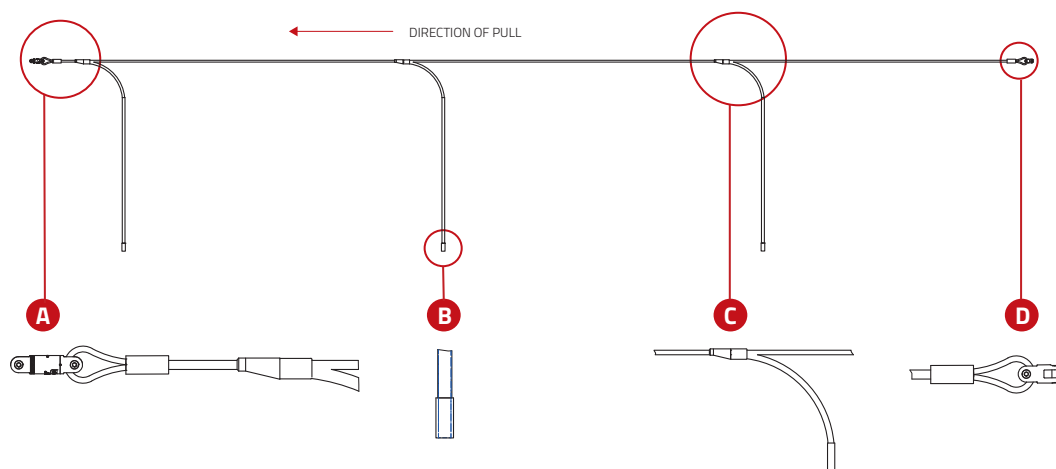


R TYPE - ROTATING EYE MULTI-WEAVE CABLE GRIP (UNDERGROUND)

Like the MU type, the rotating eye cable grip has a triple weave construction and is color coded for ease of identification. The steel forged revolving head is ideal for connecting to Slingco swivels. Warning: The Slingco rotating eye does not revolve under load and does not replace the use of a line swivel. Please see page 5 for swivel and grip match-up and safety and technical information. Made of Galvanized Steel.



Slingco Part No	Color Code	Range		Lattice Length		Approx. Break Load	
		in	mm	in	mm	lb	kg
ZCS2177	Dark Green	0.25 - 0.50	6-12	28	720	7,000	3,175
ZCS2178	Brown	0.50 - 0.75	12-19	39	978	10,500	4,760
ZCS2179	Light Blue	0.75 - 1.00	19-25	47	1,199	14,100	6,395
ZCS2180	Gold	1.00 - 1.25	25-32	60	1,529	25,000	11,340
ZCS2181	Black	1.25 - 1.50	32-38	51	1,289	31,000	14,061
ZCS2182	Red	1.50 - 1.75	38-44	73	1,860	31,000	14,061
ZCS2183	Dark blue	1.75 - 2.25	44-57	69	1,747	48,000	21,772
ZCS2779	Yellow	2.00 - 2.50	51-63	54	1,370	48,000	21,772
ZCS2780	Orange	2.50 - 3.00	63-76	52	1,311	48,000	21,772
ZCS2781	Aluminum	3.00 - 3.50	76-89	53	1,342	48,000	21,772
ZCS2782	Light Green	3.50 - 4.00	89-102	53	1,351	48,000	21,772

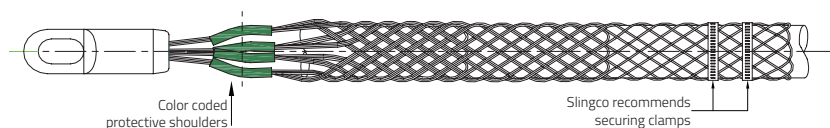

RT TYPE - ROTATING EYE DOUBLE WEAVE CABLE GRIP (UNDERGROUND)



Double weave construction for medium to heavy pulling applications in underground installations. Additionally its steel forged revolving head is ideal for connecting to Slingco swivels. Warning: The Slingco RT Type Rotating Eye Cable Grip does not revolve under load. The rotating eye does not replace the need for a swivel. Please see page 5 for swivel and grip match-up and safety and technical information.

Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
SHORT LENGTH - GALVANIZED STEEL						
ZCS2734	0.50 - 0.62	13 - 16	12	300	5,600	2,540
ZCS2735	0.62 - 0.75	16 - 19	12	305	6,800	3,084
ZCS2736	0.75 - 1.00	19 - 25	19	474	6,800	3,084
ZCS2738	1.00 - 1.50	25 - 38	22	549	12,800	5,806
ZCS2739	1.50 - 2.00	38 - 51	22	552	16,400	7,440
ZCS2740	2.00 - 2.50	51 - 63	23	587	27,200	12,338
ZCS2741	2.50 - 3.00	63 - 76	25	642	33,000	14,969
ZCS2742	3.00 - 3.50	76 - 89	29	731	43,000	19,504
ZCS2743	3.50 - 4.00	89 - 102	34	854	43,000	19,504
ZCS2744	4.00 - 4.50	102 - 114	33	826	43,000	19,504
STANDARD - LONGER LENGTH - GALVANIZED STEEL						
ZCS2745	0.50 - 0.62	13 - 16	16	405	5,600	2,540
ZCS2746	0.62 - 0.75	16 - 19	17	436	6,800	3,084
ZCS2747	0.75 - 1.00	19 - 25	30	765	6,800	3,084
ZCS2748	1.00 - 1.50	25 - 38	32	812	16,400	7,439
ZCS2749	1.50 - 2.00	38 - 51	30	747	16,400	7,439
ZCS2750	2.00 - 2.50	51 - 63	29	740	27,200	12,338
ZCS2751	2.50 - 3.00	63 - 76	35	893	33,000	14,969
ZCS2752	3.00 - 3.50	76 - 89	40	1,005	41,000	18,597
ZCS2753	3.50 - 4.00	89 - 102	40	1,014	43,000	19,504
ZCS2754	4.00 - 4.50	102 - 114	37	947	48,000	21,772
ZCS2755	4.50 - 5.00	114 - 127	53	1,350	48,000	21,772
ZCS2756	5.00 - 6.00	127 - 153	54	1,361	48,000	21,772
ZCS2757	6.00 - 7.00	153 - 178	62	1,563	48,000	21,772

FAST BANDING: Pre-Looped Bands for quickly securing grips and other simple banding applications



Use pre-looped punch style bands to quickly and securely band cable grips, hoses or other cylindrical items.


The bands are pre-looped through the buckle to slide over the end of the item being banded. Just tighten the band using the Slingco Punch Banding Tool then, when the band is tight, just punch the head of the tool and snip off the extra banding. Simple!

Banding tool					
Description					Slingco part no.
Standard punch-style banding tool.					CPC2875
Bands Pre-Looped					
Width	Thickness	Loop diameter		Pack quantity	Slingco part no.
3/8"	0.025"	13/16"		100/box	CPC2876
5/8"	0.030"	1"		100/box	CPC2880
5/8"	0.030"	1.5"		100/box	CPC2879
5/8"	0.030"	2.0"		100/box	CPC2878
5/8"	0.030"	2.5"		50/box	CPC2877
5/8"	0.030"	3.0"		50/box	CPC8532
Open End Band – 201 SS					
Width	Thickness	Length	Loop diameter	Pack quantity	Slingco part no.
5/8"	0.030"	24"	6" Single Wrap 3" Double Wrap	50/box	CPC08596

The sizes opposite refer to the inner loop diameter of the band. Select the size that will comfortably fit over the item being banded.

Open End Band – non pre-looped 201 SS 5/8" wide band with attached buckle. Includes punch style buckle. Use as single loop for larger diameter or double looped for smaller diameters and added strength. Maximum diameter for single or double loops is listed.

Note: Slingco recommends double banding the ends of cable grips.



SINGLE EYE CLOSED MESH CABLE SUPPORT GRIP

Slingco closed mesh support grip in 304 Stainless Steel. Closed mesh for when end of cable is available.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS1893	0.50 - 0.63	13 - 16	10	247	570	255
ZCS1894	0.63 - 0.75	16 - 19	10	247	890	400
ZCS1895	0.75 - 1.00	19 - 25	14	345	1,040	470
ZCS1896	1.00 - 1.25	25 - 32	14	345	1,700	770
ZCS1897	1.25 - 1.50	32 - 38	15	382	1,700	770
ZCS1898	1.50 - 1.75	38 - 44	18	450	1,700	770
ZCS1899	1.75 - 2.00	44 - 51	19	490	2,300	1,040
ZCS1900	2.00 - 2.50	51 - 64	23	574	3,400	1,540
ZCS1901	2.50 - 3.00	64 - 76	25	638	3,400	1,540
ZCS1902	3.00 - 3.50	76 - 89	29	741	5,000	2,265
ZCS1903	3.50 - 4.00	89 - 102	35	880	5,000	2,265
ZCS5032	3.50 - 4.50	89 - 114	46	1,168	5,000	2,265

SINGLE EYE SPLIT MESH LACE CLOSING CABLE SUPPORT GRIP

In 304 stainless steel. Split mesh is for when end of cable is not available.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS1904	0.50 - 0.63	13 - 16	10	247	530	240
ZCS1905	0.63 - 0.75	16 - 19	10	247	790	400
ZCS1906	0.75 - 1.00	19 - 25	14	345	1,020	460
ZCS1907	1.00 - 1.25	25 - 32	14	344	1,610	730
ZCS1908	1.25 - 1.50	32 - 38	15	382	1,610	730
ZCS1909	1.50 - 1.75	38 - 44	18	450	1,610	730
ZCS1910	1.75 - 2.00	44 - 51	19	490	2,150	975
ZCS1911	2.00 - 2.50	51 - 63	23	574	3,260	1,480
ZCS1912	2.50 - 3.00	63 - 76	25	638	3,260	1,480
ZCS1913	3.00 - 3.50	76 - 89	29	742	4,900	2,220
ZCS1914	3.50 - 4.00	89 - 102	35	880	4,900	2,220

SINGLE EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIP

Similar to the lace up grip, in 304 Stainless Steel, but in this design it is closed by inserting a metal rod down the length of the grip. For when end of cable is not available.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2362	0.50 - 0.63	13 - 16	10	247	567	255
ZCS2363	0.63 - 0.75	16 - 19	10	247	890	400
ZCS2162	0.75 - 1.00	19 - 25	13	331	1,040	470
ZCS2163	1.00 - 1.25	25 - 31	14	343	1,700	770
ZCS2164	1.25 - 1.50	31 - 38	15	382	1,700	770
ZCS2165	1.50 - 1.75	38 - 44	16	419	2,300	770
ZCS2166	1.75 - 2.00	44 - 51	20	509	3,400	1,540
ZCS2167	2.00 - 2.50	51 - 63	21	535	3,400	1,540
ZCS2168	2.50 - 3.00	63 - 76	24	611	5,000	2,265
ZCS2169	3.00 - 3.50	76 - 89	26	662	5,000	2,265
ZCS2372	3.50 - 4.00	89 - 102	29	738	5,000	2,265

DOUBLE EYE CLOSED MESH CABLE SUPPORT GRIP

Double eye closed mesh support grip in 304 stainless steel. Two eyes for two connect/support points. Closed mesh for when end of cable is available.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2038	0.50 - 0.63	13 - 16	10	247	512	230
ZCS2039	0.63 - 0.75	16 - 19	10	247	740	335
ZCS2040	0.75 - 1.00	19 - 25	14	345	1,000	450
ZCS2041	1.00 - 1.25	25 - 32	14	344	1,540	695
ZCS2042	1.25 - 1.50	32 - 38	15	382	1,540	695
ZCS2043	1.50 - 1.75	38 - 44	18	450	2,010	910
ZCS2044	1.75 - 2.00	44 - 51	19	490	2,300	1,045
ZCS2045	2.00 - 2.50	51 - 63	23	574	3,230	1,465
ZCS2046	2.50 - 3.00	63 - 76	25	638	4,000	1,815
ZCS2047	3.00 - 3.50	76 - 89	29	741	4,000	1,815
ZCS2048	3.50 - 4.00	89 - 102	35	880	4,000	1,815
ZCS6404	4.00 - 4.50	102 - 114	30	762	4,000	1,815
ZCS6405	4.50 - 5.00	114 - 127	30	762	4,000	1,815
ZCS6406	5.00 - 5.50	127 - 140	30	762	4,000	1,815

DOUBLE EYE SPLIT MESH LACE CLOSING CABLE SUPPORT GRIP

Double eye split mesh lace closing, in 304 Stainless Steel, for secure attachment and support where the cable end is not accessible.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2998	0.50 - 0.63	13 - 16	10	254	530	240
ZCS2999	0.63 - 0.75	16 - 19	10	254	790	360
ZCS3000	0.75 - 1.00	19 - 25	14	345	1,020	460
ZCS3001	1.00 - 1.25	25 - 32	14	345	1,610	730
ZCS3002	1.25 - 1.50	32 - 38	15	381	1,610	730
ZCS3003	1.50 - 1.75	38 - 44	18	450	1,610	730
ZCS3004	1.75 - 2.00	44 - 51	19	482	2,150	975
ZCS3005	2.00 - 2.50	51 - 63	23	574	3,260	1,480
ZCS3006	2.50 - 3.00	63 - 76	25	638	3,260	1,480
ZCS3007	3.00 - 3.50	76 - 89	29	742	4,900	2,222
ZCS3008	3.50 - 4.00	89 - 102	35	880	4,900	2,222

DOUBLE EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIP

Double eye split mesh rod closing, in 304 Stainless Steel, for secure attachment and support where the cable end is not accessible.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS3009	0.50 - 0.63	13 - 16	9	216	790	355
ZCS3010	0.63 - 0.75	16 - 19	9	216	790	355
ZCS3011	0.75 - 1.00	19 - 25	11	267	1,020	460
ZCS3012	1.00 - 1.25	25 - 32	12	317	1,610	730
ZCS3013	1.25 - 1.50	32 - 38	14	368	1,610	730
ZCS3014	1.50 - 1.75	38 - 44	16	394	1,610	730
ZCS3015	1.75 - 2.00	44 - 51	16	419	2,150	975
ZCS3016	2.00 - 2.50	51 - 63	19	495	3,260	1,475
ZCS3017	2.50 - 3.00	63 - 76	21	546	3,260	1,475
ZCS3018	3.00 - 3.50	76 - 89	24	597	5,750	2,600
ZCS3019	3.50 - 4.00	89 - 102	26	648	5,750	2,600

OFFSET EYE CLOSED MESH CABLE SUPPORT GRIP

This offset eye grip, in 304 Stainless Steel, is designed to support cable as it hangs vertically or horizontally when the end of the cable is available.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS1915	0.50 - 0.63	13 - 16	10	247	512	230
ZCS1916	0.63 - 0.75	16 - 19	10	247	740	335
ZCS1917	0.75 - 1.00	19 - 25	14	345	1,000	450
ZCS1918	1.00 - 1.25	25 - 32	14	345	1,540	695
ZCS1919	1.25 - 1.50	32 - 38	16	415	1,540	695
ZCS1920	1.50 - 1.75	38 - 44	18	450	2,010	910
ZCS1921	1.75 - 2.00	44 - 51	21	530	2,010	910
ZCS1922	2.00 - 2.50	51 - 63	23	574	3,230	1,465
ZCS1923	2.50 - 3.00	63 - 76	31	779	3,230	1,815
ZCS1924	3.00 - 3.50	76 - 89	36	915	4,000	1,815
ZCS1925	3.50 - 4.00	89 - 102	41	1,050	4,000	1,815
ZCS6408	4.00 - 4.50	102 - 114	30	762	4,000	1,815
ZCS6409	4.50 - 5.00	114 - 127	30	762	4,000	1,815
ZCS6410	5.00 - 5.50	127 - 140	30	762	4,000	1,815

OFFSET EYE SPLIT MESH LACE CLOSING CABLE SUPPORT GRIP

This grip, in 304 Stainless Steel, is ideal for several support points along the same cable when the cable ends are not accessible.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS1926	0.50 - 0.63	13 - 16	10	249	500	225
ZCS1927	0.63 - 0.75	16 - 19	10	249	750	340
ZCS1928	0.75 - 1.00	19 - 25	14	345	950	430
ZCS1929	1.00 - 1.25	25 - 32	14	345	1,500	680
ZCS1930	1.25 - 1.50	32 - 38	16	415	1,500	680
ZCS1931	1.50 - 1.75	38 - 44	18	450	1,500	680
ZCS1932	1.75 - 2.00	44 - 51	21	530	2,000	905
ZCS1933	2.00 - 2.50	51 - 63	23	574	2,150	975
ZCS1934	2.50 - 3.00	63 - 76	25	638	2,150	975
ZCS1935	3.00 - 3.50	76 - 89	29	742	3,800	1,720
ZCS1936	3.50 - 4.00	89 - 102	35	880	3,800	1,720

OFFSET EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIP

Ideal for several support points along the same cable when the cable ends are not accessible. Made from 304 Stainless Steel.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS3031	0.50 - 0.63	13 - 16	7	178	500	225
ZCS3032	0.63 - 0.75	16 - 19	9	229	750	340
ZCS3033	0.75 - 1.00	19 - 25	10	254	950	430
ZCS3034	1.00 - 1.25	25 - 32	12	305	1,500	680
ZCS3035	1.25 - 1.50	32 - 38	14	359	1,500	680
ZCS3036	1.50 - 1.75	38 - 44	15	381	1,500	680
ZCS3037	1.75 - 2.00	44 - 51	16	406	2,000	905
ZCS3038	2.00 - 2.50	51 - 63	19	483	3,100	975
ZCS3039	2.50 - 3.00	63 - 76	20	508	3,100	975
ZCS3040	3.00 - 3.50	76 - 89	21	533	4,300	1,720
ZCS3041	3.50 - 4.00	89 - 102	21	533	4,300	1,720

UNIVERSAL EYE CLOSED MESH CABLE SUPPORT GRIP

Fitted with an adjustable eye for easy and secure attachment, where the end of the cable can be inserted in to the support grip. Made from 304 Stainless Steel.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2664	0.50 - 0.63	13 - 16	10	254	530	240
ZCS4272	0.58 - 0.68	14.7 - 17.3	12	305	1,050	469
ZCS2665	0.63 - 0.75	16 - 19	10	254	790	360
ZCS2666	0.75 - 1.00	19 - 25	14	345	1,020	460
ZCS4273	0.75 - 0.87	19 - 22.1	13	330	1,390	620
ZCS4274	0.87 - 1.00	22.1 - 25.4	14	355	1,790	799
ZCS2667	1.00 - 1.25	25 - 32	14	355	1,610	730
ZCS2324	1.25 - 1.50	32 - 38	15	381	1,610	730
ZCS2668	1.50 - 1.75	38 - 44	18	450	1,610	730
ZCS2669	1.75 - 2.00	44 - 51	19	483	2,150	975
ZCS2670	2.00 - 2.50	51 - 63	23	574	3,260	1,480
ZCS2671	2.50 - 3.00	63 - 76	25	638	3,260	1,480

UNIVERSAL EYE SPLIT MESH LACE CLOSING CABLE SUPPORT GRIP

Fitted with an adjustable eye for easy and secure attachment, where the end of the cable is not accessible. Made from 304 Stainless Steel.



Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2672	0.50 - 0.63	13 - 16	10	254	530	240
ZCS2673	0.63 - 0.75	16 - 19	10	254	790	360
ZCS2674	0.75 - 1.00	19 - 25	14	345	1,020	460
ZCS2675	1.00 - 1.25	25 - 32	14	355	1,610	730
ZCS2676	1.25 - 1.50	32 - 38	15	381	1,610	730
ZCS2677	1.50 - 1.75	38 - 44	17	432	1,610	730
ZCS2678	1.75 - 2.00	44 - 51	19	483	2,150	975
ZCS2679	2.00 - 2.50	51 - 63	21	533	3,260	1,480
ZCS2680	2.50 - 3.00	63 - 76	23	584	3,280	1,480
ZCS2681	3.00 - 3.50	76 - 89	25	635	4,900	2,222
ZCS2682	3.50 - 4.00	89 - 102	27	686	4,900	2,222



UNIVERSAL EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIP

Fitted with an adjustable eye for easy and secure attachment, where the end of the cable is not accessible. Made from 304 Stainless Steel.




Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lbs	kg
ZCS2683	0.50 - 0.63	12 - 16	9	216	530	240
ZCS2684	0.63 - 0.75	16 - 19	9	216	790	360
ZCS2685	0.75 - 1.00	19 - 25	11	267	1,020	460
ZCS2686	1.00 - 1.25	25 - 32	13	317	1,610	730
ZCS2687	1.25 - 1.50	32 - 38	15	368	1,610	730
ZCS2688	1.50 - 1.75	38 - 44	16	394	1,610	730

Heavy Duty support grips made from Stainless Steel are perfect for supporting heavier cable, conduit, or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.




HEAVY DUTY SUPPORT GRIPS - SINGLE EYE

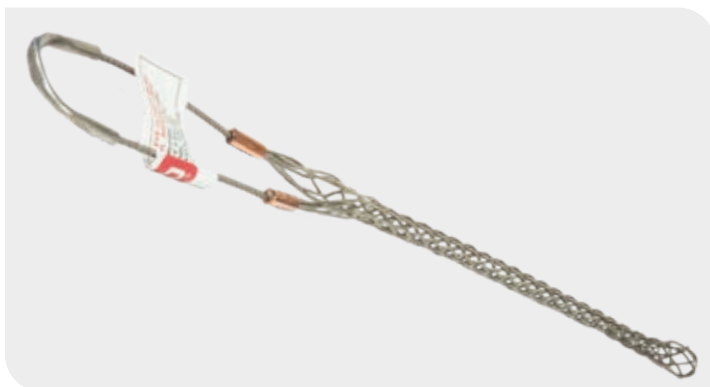


Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS7065	0.50 - 0.63	13 - 16	10	254	Stainless Steel	1,370	621
ZCS7066	0.63 - 0.75	16 - 19	11	267	Stainless Steel	2,080	944
ZCS7067	0.75 - 1.00	19 - 25	13	340	Stainless Steel	2,080	944
ZCS7068	1.00 - 1.25	25 - 32	15	381	Stainless Steel	2,680	1,216
ZCS7069	1.25 - 1.50	32 - 38	18	445	Stainless Steel	4,490	2,037
ZCS7070	1.50 - 1.75	38 - 44	19	495	Stainless Steel	4,490	2,037
ZCS7071	1.75 - 2.00	44 - 51	21	533	Stainless Steel	5,000	2,269
ZCS7072	2.00 - 2.50	51 - 63	21	546	Stainless Steel	8,940	4,056
ZCS7073	2.50 - 3.00	63 - 76	23	572	Stainless Steel	8,940	4,056
ZCS7074	3.00 - 3.50	76 - 89	27	686	Stainless Steel	10,250	4,649
ZCS7075	3.50 - 4.00	89 - 102	32	820	Stainless Steel	10,250	4,649

HEAVY DUTY SUPPORT GRIPS - SINGLE EYE LACE-UP

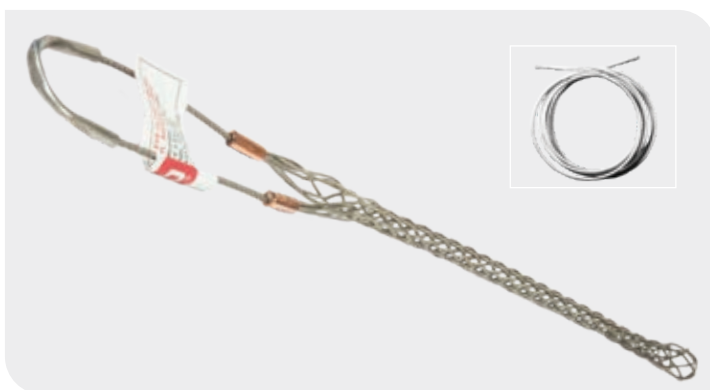

Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS6907	0.50 - 0.63	13 - 16	11	279	316 SS	1,370	621
ZCS6908	0.63 - 0.75	16 - 19	13	340	316 SS	2,080	944
ZCS6909	0.75 - 1.00	19 - 25	13	340	316 SS	2,080	944
ZCS6910	1.00 - 1.25	25 - 32	13	340	316 SS	2,670	1,211
ZCS6911	1.25 - 1.50	32 - 38	17	430	316 SS	4,490	2,037
ZCS6912	1.50 - 1.75	38 - 44	19	470	316 SS	4,490	2,037
ZCS6913	1.75 - 2.00	44 - 51	23	572	316 SS	5,000	2,269
ZCS6914	2.00 - 2.50	51 - 63	23	572	316 SS	8,940	4,056
ZCS6915	2.50 - 3.00	63 - 76	25	635	316 SS	8,940	4,056
ZCS6916	3.00 - 3.50	76 - 89	29	724	316 SS	13,420	6,089
ZCS6917	3.50 - 4.00	89 - 102	29	724	316 SS	13,420	6,089

HEAVY DUTY SUPPORT GRIPS - SINGLE EYE ROD CLOSING

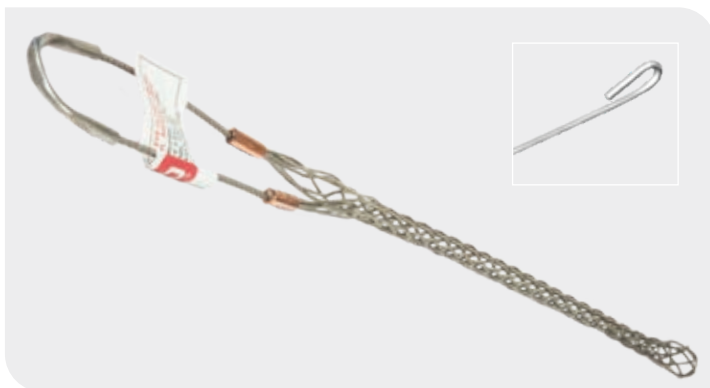

Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS7076	0.50 - 0.63	13 - 16	11	279	304 SS	1,370	621
ZCS7077	0.63 - 0.75	16 - 19	12	305	304 SS	2,080	944
ZCS7078	0.75 - 1.00	19 - 25	14	356	304 SS	2,080	944
ZCS7079	1.00 - 1.25	25 - 32	15	381	304 SS	2,680	1,215
ZCS7080	1.25 - 1.50	32 - 38	16	419	304 SS	4,490	2,037
ZCS7081	1.50 - 1.75	38 - 44	19	495	304 SS	4,490	2,037
ZCS7082	1.75 - 2.00	44 - 51	21	533	304 SS	5,000	2,269
ZCS7083	2.00 - 2.50	51 - 63	26	660	304 SS	8,940	4,056
ZCS7084	2.50 - 3.00	63 - 76	25	623	304 SS	8,940	4,056
ZCS7085	3.00 - 3.50	76 - 89	27	686	304 SS	13,420	6,089
ZCS7086	3.50 - 4.00	89 - 102	36	914	304 SS	13,420	6,089

HEAVY DUTY SUPPORT GRIPS - DOUBLE EYE



Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS3057	0.50 - 0.63	13 - 16	12	303	316 SS	1,370	621
ZCS3058	0.63 - 0.75	16 - 19	11	275	316 SS	2,080	944
ZCS3059	0.75 - 1.00	19 - 25	14	365	316 SS	2,080	944
ZCS3060	1.00 - 1.25	25 - 32	14	365	316 SS	2,670	1,211
ZCS7136	1.00 - 1.25	25 - 32	22	559	316 SS	2,670	1,211
ZCS7137	1.25 - 1.50	32 - 38	25	640	316 SS	4,490	2,037
ZCS7138	1.50 - 1.75	38 - 44	27	686	316 SS	4,490	2,037
ZCS7139	1.75 - 2.00	44 - 51	29	735	316 SS	5,000	2,268
ZCS3064	2.00 - 2.50	51 - 63	21	533	316 SS	8,940	4,056
ZCS7140	2.00 - 2.50	51 - 63	28	705	316 SS	8,940	4,056
ZCS3065	2.50 - 3.00	63 - 76	25	623	316 SS	8,940	4,056
ZCS7141	2.50 - 3.00	63 - 76	30	762	316 SS	8,940	4,056
ZCS7142	3.00 - 3.50	76 - 89	34	864	316 SS	12,000	5,445
ZCS7143	3.50 - 4.00	89 - 102	38	965	316 SS	12,000	5,445
ZCS7144	4.00 - 4.50	102 - 114	42	1,066	316 SS	12,000	5,445
ZCS7145	4.50 - 5.00	114 - 127	42	1,066	316 SS	12,000	5,445

HEAVY DUTY SUPPORT GRIPS - DOUBLE EYE LACE-UP



Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS7087	0.50 - 0.63	13 - 16	11	277	316 SS	1,370	621
ZCS7088	0.63 - 0.75	16 - 19	12	309	316 SS	2,080	944
ZCS7089	0.75 - 1.00	19 - 25	13	332	316 SS	2,080	944
ZCS7090	1.00 - 1.25	25 - 32	14	350	316 SS	2,670	1,211
ZCS7091	1.25 - 1.50	32 - 38	16	417	316 SS	4,490	2,037
ZCS7092	1.50 - 1.75	38 - 44	19	490	316 SS	4,490	2,037
ZCS7093	1.75 - 2.00	44 - 51	23	585	316 SS	5,000	2,269
ZCS7094	2.00 - 2.50	51 - 63	22	565	316 SS	8,940	4,056
ZCS7095	2.50 - 3.00	63 - 76	25	623	316 SS	8,940	4,056
ZCS7096	3.00 - 3.50	76 - 89	29	730	316 SS	13,420	6,089
ZCS7097	3.50 - 4.00	89 - 102	29	730	316 SS	13,420	6,089

HEAVY DUTY SUPPORT GRIPS - DOUBLE EYE ROD CLOSING



Slingco Part No.	Range		Lattice Length		Lattice Material	Approx. Break Load	
	in	mm	in	mm		lb	kg
ZCS7098	0.50 - 0.63	13 - 16	11	277	304 SS	1,370	621
ZCS7099	0.63 - 0.75	16 - 19	12	309	304 SS	2,080	944
ZCS7100	0.75 - 1.00	19 - 25	14	351	304 SS	2,080	944
ZCS7101	1.00 - 1.25	25 - 32	15	391	304 SS	2,680	1,215
ZCS7102	1.25 - 1.50	32 - 38	16	417	304 SS	4,490	2,037
ZCS7103	1.50 - 1.75	38 - 44	19	494	304 SS	4,490	2,037
ZCS7104	1.75 - 2.00	44 - 51	21	537	304 SS	5,000	2,269
ZCS7105	2.00 - 2.50	51 - 63	26	654	304 SS	8,940	4,056
ZCS7106	2.50 - 3.00	63 - 76	25	623	304 SS	8,940	4,056
ZCS7107	3.00 - 3.50	76 - 89	27	693	304 SS	13,420	6,089
ZCS7108	3.50 - 4.00	89 - 102	36	914	304 SS	13,420	6,089

NEED ADDITIONAL RODS OR LACE WIRE?

Call or email your Slingco representative now!

888 685 9478

sales@slingcoamerica.com

CONDUIT RISER CABLE GRIP - STAINLESS STEEL



Conduit riser grips are designed to support cables within conduit. Designed to match standard conduit sizes. These grips come in single and double weave as indicated in the chart below. Also available in Split Ring design for supporting cable already installed or when the end of the cable is not available.

Call 888-685-9478 for additional sizes and styles.

Slingco comparison reference numbers and Approximate breaking strengths (lb)

Conduit size inches	Cable sizes diameter inches																	
	0.50 - 0.63	0.63 - 0.75	0.75 - 1.00	1.00 - 1.25	1.25 - 1.50	1.50 - 1.75	1.75 - 2.00	2.0 - 2.5	2.0 - 3.0	2.5 - 3.0	2.5 - 3.5	3.0 - 3.5	3.5 - 4.0	3.5 - 4.0	3.5 - 4.5	4.0 - 4.5	4.5 - 5.0	4.5 - 5.5
Length inches																		
8	9	11	12	12	14	15	17	20	18	19	20	18	21	20	21	27	27	
0.75	ZCS2690 530																	
1	ZCS2691 490	ZCS2694 790																
1.25	ZCS2692 450	ZCS2695 740	ZCS2698 1,030															
1.5		ZCS2696 690	ZCS2699 970	ZCS2701 1,610														
2	ZCS2693 370	ZCS2697 640	ZCS2700 920	ZCS2702 1,520	ZCS2704 1,610													
2.5			ZCS2711 870		ZCS2705 1,510	ZCS2707 1,610	ZCS2708 2,150											
3				ZCS2703 1,340	ZCS2706 1,400	ZCS2709 1,490	ZCS2710 1,990	ZCS2711 3,260										
3.5								ZCS2714 2,970		ZCS2716 3,260								
4							ZCS2712 1,670	ZCS2713 2,680		ZCS2715 2,890	ZCS4282 4,080	ZCS2717 4,080						
								ZCS4500* 2,722		ZCS4501* 2,722	SPLIT ROD							
5								ZCS5645* 2,150	ZCS2719 2,150			ZCS2721 2,860	ZCS5646* 3,130	ZCS2723 3,130	ZCS3200* 10,000	ZCS4283 3,080	ZCS4277 3,130	
												ZCS4502* 2,722						
6												ZCS2722 2,240	ZCS2724 2,240	ZCS5647 2,240	ZCS4755 2,240	ZCS3259 4,995	ZCS4284 (4,995)	

*indicates Double Weave

HOOKED EYE RISER POLE CABLE SUPPORT GRIP



Heavy duty stainless steel grip for outdoor riser pole applications.

Slingco Part No	Range		Lattice Weave	Lattice Length		Approx. Break Load	
	in	mm		in	mm	lb	kg
ZCS5430	2.25 - 2.75	57 - 70	Double	21	533	2,000	910
ZCS5268	3.25 - 3.75	82 - 95	Double	21	533	6,500	2,950
ZCS5062	3.50 - 4.25	89 - 108	Double	21	533	6,500	2,950
ZCS4301	4.0 - 4.50	102 - 114	Double	21	533	6,500	2,950


WIND TURBINE SUPPORT GRIP - HEAVY DUTY THIMBLE OFFSET EYE

Slingco has developed a range of cable grips tailored for the renewable energy sector for use in:

- Cable installation – on-shore and off-shore
- Cable support inside wind turbines
- Cable management

For wind turbines, special features have been adapted to allow for minimal contact with the actual cable while still allowing excellent working loads and cable support.

The Slingco Wind Turbine Support Grip is manufactured from 316 Stainless Steel and provides cable support and control inside the wind turbine. It features rounded copper ferrules and offers reduced cable contact for high vibration environments. Custom grips can be adapted to meet any requirement.

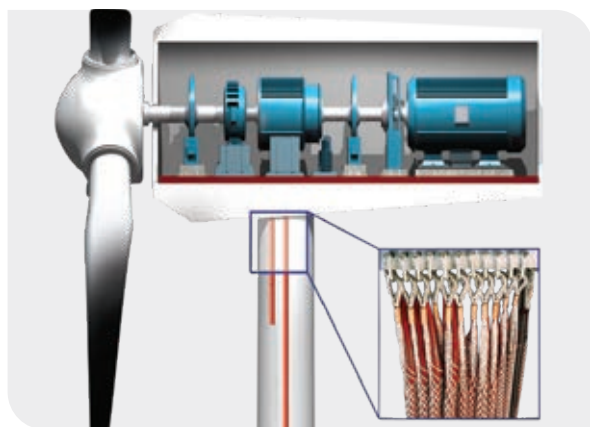

Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2844	0.31 - 0.40	8 - 10	19	480	1,455	660
ZCS2845	0.40 - 0.60	10 - 15	17	432	2,284	1,036
ZCS2846	0.60 - 0.80	15 - 20	17	432	2,901	1,316
ZCS2847	0.80 - 0.99	20 - 25	18	461	4,586	2,080
ZCS2848	1.0 - 1.19	25 - 30	16	413	5,467	2,480
ZCS2849	1.20 - 1.58	30 - 40	19	470	7,716	3,500
ZCS2850	1.58 - 1.98	40 - 50	32	825	10,781	4,890
ZCS2851	1.98 - 2.37	50 - 60	30	751	10,791	4,895
ZCS2852	2.38 - 2.77	60 - 70	31	788	14,163	6,424
ZCS2853	2.77 - 3.55	70 - 90	45	1,135	14,163	6,424
ZCS2854	3.55 - 4.33	90 - 110	31	799	18,367	8,331

EXTENDED THIMBLE EYE HEAVY DUTY DOUBLE WEAVE STAINLESS STEEL CABLE GRIP



Slingco Part No	Range		Lattice Length		Eye Extension Length		Approx. Break Load	
	in	mm	in	mm	in	mm	lb	kg
ZCS2870	0.39 - 0.60	10 - 15	17	438	17	435	2,295	1,040
ZCS2871	0.60 - 0.80	15 - 20	16	411	17	442	2,903	1,315
ZCS2872	0.80 - 0.99	20 - 25	18	461	18	450	4,590	2,082
ZCS2873	1.0 - 1.19	25 - 30	16	413	18	455	5,468	2,480
ZCS2874	1.20 - 1.58	30 - 40	17	440	18	463	7,898	3,582

Slingco: committed to the Renewable Energy sector

We offer a range of cable grips tailored to the renewable energy sector. Applications include cable installation (on-shore and off-shore), support of cables inside wind turbines and general cable management. We have also developed a range of cable pulling grips for use in the installation of inter-array and export cables from offshore wind farm installations.



In addition to our existing ranges, custom grips can be designed to meet any requirement.

Contact us at **888 685 9478**
or email sales@slingcoamerica.com for details.



CATCHBLOCK OVERHEAD LINE CATENARY ROLLER

**RECOVER BROKEN CONDUCTORS
WITHOUT ACCESSING PROPERTY
OR INFRASTRUCTURE BELOW**

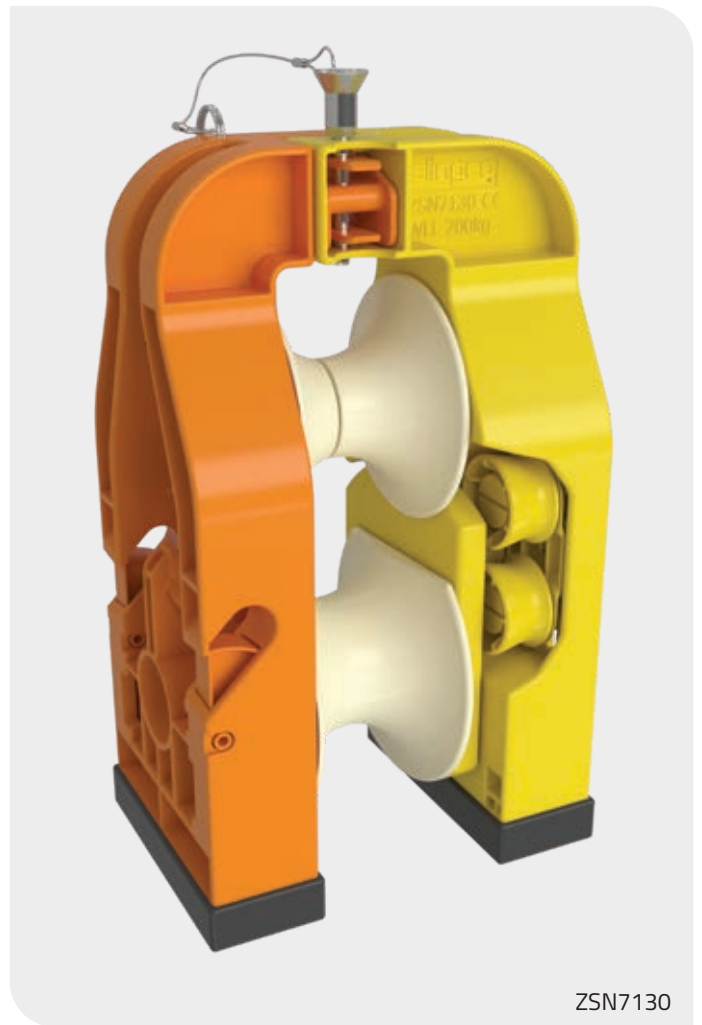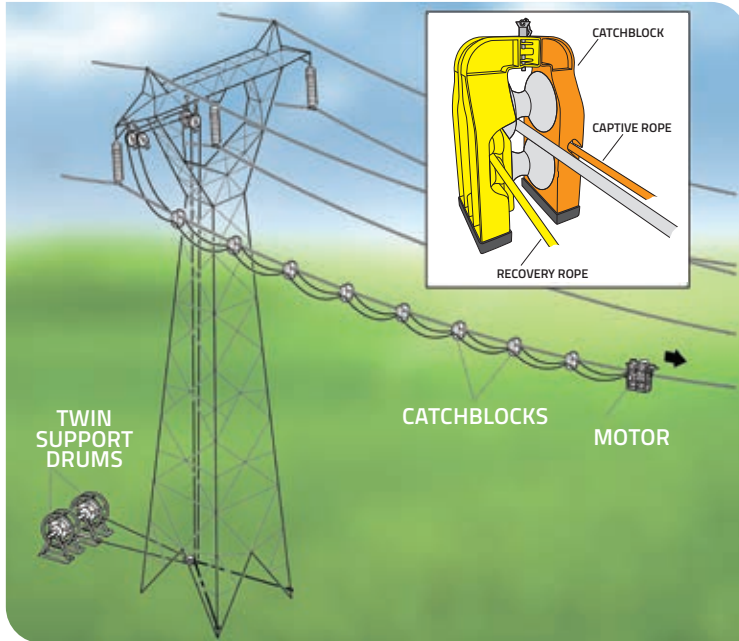

ZSN7130

About the CatchBlock system

The challenges faced by the overhead line (OHL) industry due to the growing number of infrastructure projects built beneath existing transmission and distribution networks – alongside increasingly stringent OHL regulations – can make maintenance costly, time-consuming and challenging. Lightweight, robust and easy to deploy, CatchBlock helps overcome these issues, increasing efficiency and reducing costs.

CatchBlock is an innovative OHL catenary roller system. Designed to deploy a two-rope system, it allows the recovery of broken conductors without accessing the property or infrastructure below.

Though most off-the-shelf systems offer efficient single rope deployment, they frequently fail to meet the specifications required by third party clients who own property below overhead conductors. The CatchBlock system not only satisfies the most demanding requirements, but also, because it eliminates the need to shut down essential infrastructure for conductor repairs or in the event of an emergency, estimating maintenance and refurbishment projects costs easier and more accurate.

KEY PRODUCT FEATURES

- Securely holds the deployment ropes without needing bonded ferrules
- Dual rope system tensioned simultaneously to prevent flipping
- CatchBlock prevents excess slack in sub-spans by automatically adjusting position via yellow rope
- Rope color coordinated to CatchBlock for easy deployment
- No tools required for CatchBlock installation
- System approved and accepted by National Grid and National Rail in the UK

Slingco Part No.	Description	WLL	Weight	Dimensions
ZSN7130	CatchBlock	440 lb (200 kg)	5.0 lb (2.26 kg)	6.9" x 4.7" x 11.4" (17.5 x 12 x 29 cm)

How the CatchBlock system works






Although off-the-shelf, single-rope systems are built to handle broken conductors, if a break happens in a span, over or near an obstacle, two loose ends of the conductor may be left hanging over the obstacle.

The CatchBlock system combines a support rope and a recovery rope so that, in the event of conductor failure (figure 1), both the conductor and CatchBlock system can be

returned to the towers on both sides of the obstacle by pulling back the support rope and leaving the recovery rope in place (figure 2).

The CatchBlock system can then be easily redeployed (figure 3) on the recovery rope and tensioned as normal. The initial recovery rope is then disconnected and joined up to the two conductor ends to pull one end towards the other and re-connect them (figure 4).

Unlike conventional systems, the Catchblock retains both deployment ropes at all times, avoiding any slack between the rollers. This means that even during the recovery phase the support rope is captured, and distance is maintained between the rollers. Both ropes are always controlled and are not allowed to run freely in any of the roller mechanisms.

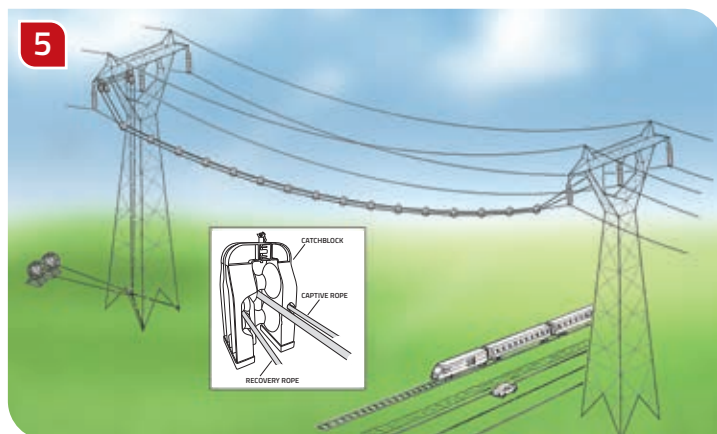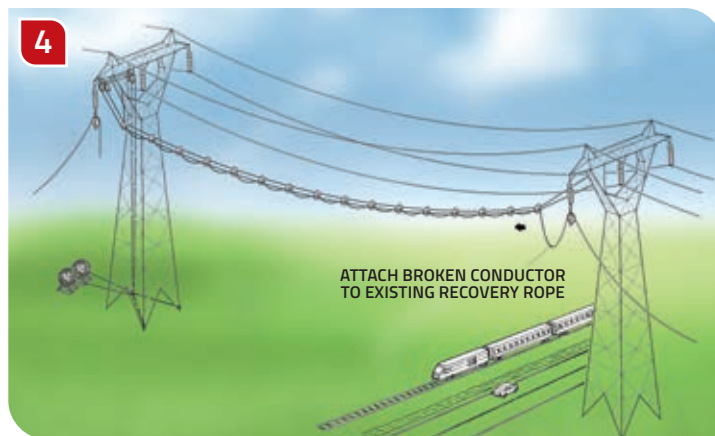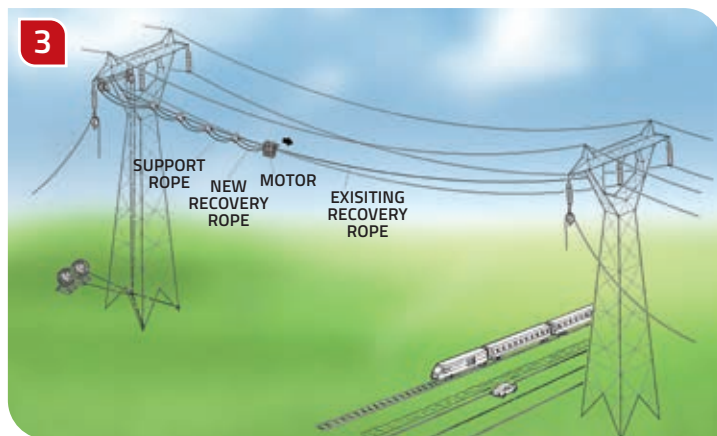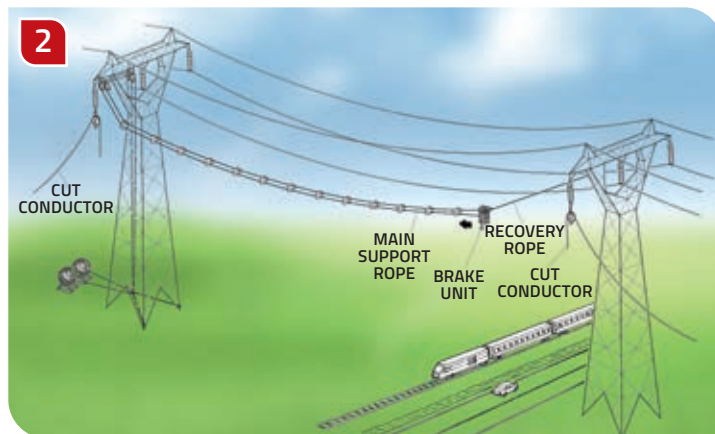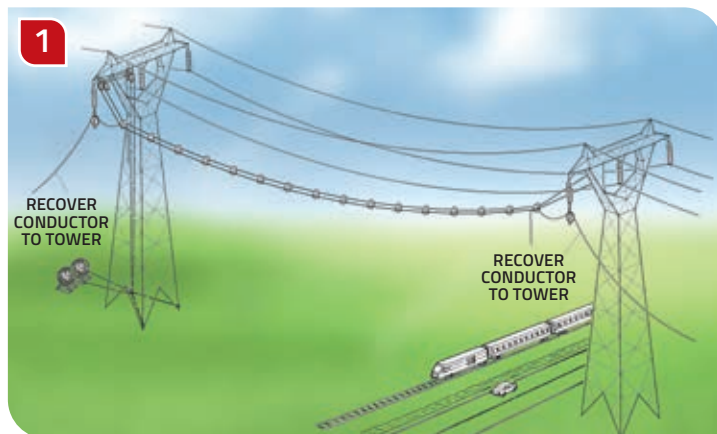

THE CATCHBLOCK SYSTEM
COMBINES A SUPPORT ROPE
AND A RECOVERY ROPE

IN THE EVENT OF CONDUCTOR
FAILURE BOTH CONDUCTOR AND
CATCHBLOCK CAN BE RECOVERED

REMOTELY OPERATED CABLE TUG UNIT



Slingco Part No	Description	Dimensions	Weight
ZSN13024	MFCR	31.5" x 19.7" x 11.8" (80 x 50 x 30 cm)	68 lb (31 kg) - including battery
	18V Rechargeable Li-Ion Battery		6.5 lb (3 kg)
ZSN13024	Recovery device	16.5" x 11.8" x 7.9" (42 x 30 x 20 cm)	32 lb (14.5 kg)

Slingco's Remotely Operated Cable Tug Unit is a remotely operated, motorized aluminum chassis tug unit used for reconductoring over hazards or infrastructure.

The compact unit is powered using a rechargeable Li-Ion battery which makes for quick onsite changeover in remote areas and designed to be used with conductor replacement systems and inspection devices. The unit comes complete with a standard recovery device.

- Max tractive effort of 132 lb (60 kg), up to 88 lb (40 kg) on a 20° incline and 0.787" (20 mm) conductor*
- Automatic soft start - 2.5 mph (4 kph) with approximately 120 minutes of run time using a fully charged 12 AH battery
- Electrically driven using a Milwaukee M18 rechargeable battery
- Remote controlled within 1,600 ft (500 m)
- Operates on conductor/rope diameters from 0.375" to 1.65" (14-42 mm)
- Smooth transition over mid-span joints/connectors up to 2.1" (54 mm)
- Deployable from any direction with forward and reverse modes
- Dedicated lifting point
- Fully recoverable from either end

* Tractive effort will be increased on larger diameter conductors

BOLLARD CLAMP



Slingco Part No.	WLL	Material	Weight	Barrel Diameter	Rope Compatibility
ZSN11372	3,800 lb (17 kN)	Aluminum (6082/1050)	6.5 lb (3 kg)	7.87" (200 mm)	12-20mm

Figures given above are indicative only. Nominal figures/actuals are as per datasheet with tolerances of +/-5%. Datasheets available on request.

The Bollard Clamp is an easy to use tensioning device that can be used without risk of damage to the tensioned rope. This is a major advantage over standard types of gripping devices, which could potentially crush or compress the rope or its outer coating.

Installation of the Bollard Clamp is simple, requiring no tools, and the device can be fitted anywhere along the length of the rope using a spring-loaded rope captivation lever. Once installed, the clamp utilizes the friction created over a large area of the rope to enable the required tension to the specified WLL.

- Tension without damage to rope, outer coating or underlying layers
- Secures the rope up to 3X WLL and proof loaded to 1.5X WLL
- Lightweight
- Compatible with 0.47" to 0.787" (12-20 mm) diameter ropes

CAN'T FIND THE SPECIFICATION YOU NEED?

Call or email for full ranges plus custom manufacture options

888 685 9478
sales@slingco.com

CONDUCTOR REPLACEMENT ROLLER



The Conductor Replacement Roller (CRR) provides a simple, conductor-deployed protection system using a lightweight aramid rope.

The CRR unit enables the safe exchange of conductors in three easy steps:

1. Laying out the pulling cable, e.g. with Remotely Operated Cable Tug Unit.
2. Tensioning the CRR Block assembly.
3. Feeding a new conductor through the cable pulleys of the CRR Block.

The CRR rollers have spring loaded gripping feature to secure the rope laterally without impinging any rotational movement as the rollers rotate around the axis of the conductor. Considerable effort has been made to reduce the complexity of the design to provide a simple mechanism to hold the rope and then connect around the conductor.

Designed for rapid deployment and secure connection, the external locking mechanism can be inspected from ground level.

- 30% glass filled Nylon 6 from custom mold tooling.
- Unique design incorporates aperture of 65mm to accept smooth passage of joints and connectors.
- Type registered to industry standards
- Non conductive through use of insulating materials

Slingco Part No.	Weight	WLL	FOS (industry standard)
ZSN11371	2.7 lb (1.25 kg)	401 lb (200 kg)	1,764 lb (800 kg)

ROBLON HIGH VOLTAGE PULLING ROPE




Roblon HVPR was initially designed for live-line stringing using the cradle-block method, but its excellent dielectric properties enable it to be used as helicopter longlines, guy lines for transmission towers and short-haul lines for work in live electrical environments, and other applications.

Roblon HVPR is a dielectric rope used for stringing and service operations, for installing OPGW, and similar operations. The rope is torque balanced and lightweight.

Roblon HVPR is manufactured from high performance aramid fibers with a thermoplastic polyurethane (TPU) coating. Roblon HVPR is available in four dimensions as standard (if other types are required, please contact us).

Diameter	0.35 in (9 mm)	0.55 in (13.85 mm)	0.74 in (18.8 mm)	0.99 in (25.1 mm)
Breaking strength (minimum)	7,868 lb (>35 kN)	19,108 lb (>85 kN)	29,225 lb (>130 kN)	44,961 lb (>200 kN)
Weight per metre (nom.)	2.4 oz (68 g/m)	5.7 oz (162 g/m)	8.1 oz (230 g/m)	12.1 (343 g/m)
Elongation at break	3.6%			
Thermal expansion factor	-4.5×10^{-6}			
Cross section area (outer)	2.5 in ² (63.6 mm ²)	5.9 in ² (150.6 mm ²)	7.9 in ² (201.0 mm ²)	12.4 in ² (314.2 mm ²)
Cross section (fibre core)	1.7 in ² (43.0 mm ²)	4.6 in ² (117.9 mm ²)	5.2 in ² (133.0 mm ²)	10.5 in ² (265.9 mm ²)
Stiffness	269,770 lb (1,200 kN)	876,755 lb (3,900 kN)	1,461,258 lb (6,500 kN)	2,697,708 lb (12,000 kN)
Final modulus of elasticity	18.8 GPa	26.4 GPa	32.7 GPa	38.6 GPa

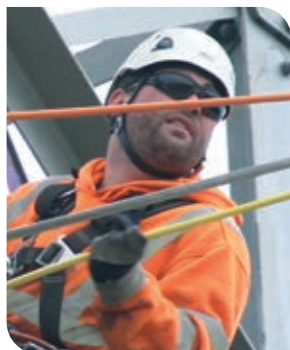

FIBERGLASS EXTENSION ARM



ITP10474




ITP14771



ITP14754

Slingco Fiberglass Extension Arms are used to move conductor to create working clearance in congested areas, or as a temporary aid in replacing insulators and/or conductor. The Fiberglass Extension Arm complies with ASTM F711, OSHA 1910.269 (j)(l), and OSHA 1926.957 (a)(l).

The arm is rated for 34.5kV with insulators and 15kV without insulators. It includes a double bracket system that will fit over crossarms up to 6" x 6". The wire holders will accommodate cables up to 1.6" in diameter.

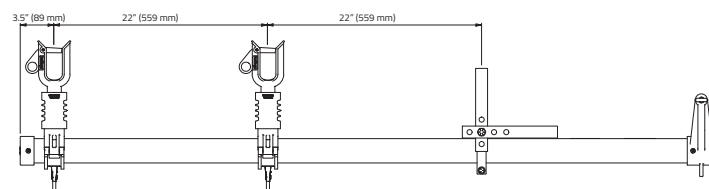

Part No.	Description	Weight (lb)	Weight (kg)	Phase-to-Phase Rating (as supplied)	Max Vertical Load per Wireholder lb (kg)
ITP10989	Crossarm FEA without Insulators	21.2	9.62	15kV	200 (90.72)
ITP10474	Crossarm FEA with Insulators	23.4	10.61	34.5kV	200 (90.72)
ITP10925	Fiberglass Crossarm Retrofit Kit				
ITP14754	Chain Binder Single Conductor	16.5	7.48	34.5kV	200 (90.72)
ITP14726	Chain Binder Double Conductor	21.6	9.79	34.5kV	200 (90.72)
ITP14767	Ratchet Strap Single Conductor	14.8	6.70	34.5kV	200 (90.72)
ITP14771	Ratchet Strap Double Conductor	20.0	9.08	34.5kV	200 (90.72)

JIB HEAD ADAPTER



- For mounting jib head attachments and assemblies
- Manufactured from zinc plated steel
- Supplied with machined pin and lanyard

Slingco Part No.	Dimensions (Square ID)		Type
	in	mm	
ZWH10911	4.1 x 4.1	104.1 x 104.1	Square to Round Adapter

CAN'T FIND THE SPECIFICATION YOU NEED?

Call or email for full ranges plus custom manufacture options

888 685 9478

sales@slingco.com

35KV JUMPER CLAMP



Slingco's Jumper Clamps are used as a part of jumper cable assemblies to bypass work areas when equipment is under repair or being upgraded. Jumper clamps are lightweight and impact resistant making them incredibly durable. We make inspection of the cable, ferrule, and clamp simple and easy via the transparent clamp body. The jaw of the Slingco Jumper Clamp and floating ring contact is made from a copper-based alloy.

Slingco Part No.	Main Line Range	Max. Continuous Amps	Threading	Length	Weight
ZSC09344	954 MCM (0.162 - 1.25)	400	5/8" - 11 threads per inch	11.5" (292mm)	2.5 lb (1.15 kg)
ZSC12110	477 MCM (0.162 - 0.9)	400	5/8" - 11 threads/inch	11.5" (292mm)	2.4 lb (1.09 kg)

NOTE: Slingco Jumper Clamps are sold individually. Slingco Jumper Clamps meet ASTM F2321 standard.

GROUNDING CLAMPS

Slingco's grounding clamps meet ASTM F855 and have a maximum line range of up to 2" (50.8mm) which allows them to be used in a wide variety of grounding applications.


Aluminum Grounding Clamps

Slingco's aluminum grounding clamps have a location for a grounding stud which allows for a wide variety of grounding applications. The Slingco aluminum clamps come with serrated and a smooth jaw offering.


Bronze Grounding Clamps

Slingco's bronze grounding clamps have set screws in the moveable jaw which allows the user to adjust and make sure there is a secure connection between the clamp and cable. The flat face clamps come with a serrated jaw and are available with a T-handle or Eye Bolt.

- Meets ASTM F855 specification
- Line range up to 2" (50.8 mm)



ZGC12033



ZGC12034




ZGC12035




ZGC12036



ZGC12037



ZGC12038



ZGC12039



ZGC12040

Slingco Part no.	Description	Clamp Material	Eye Type	Class/ASTM Grade	Line Range		Weight	
					mm	in	lb	kg
ZGC12033	Duckbill Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.85	0.84
ZGC12034	Duckbill Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.98	0.90
ZGC12035	1.5" (38 mm) C-Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.85	0.84
ZGC12036	1.5" (38 mm) C-Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.98	0.90
ZGC12037	2" (51 mm) C-Clamp w/ Serrated Jaw	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-2.00	4.06-50.80	2.25	1.02
ZGC12038	2" (51 mm) C-Clamp w/ Smooth Jaw	Aluminum	Eye Bolt	Class A/Grade 5H	0.16-2.00	4.06-50.80	2.20	1.00
ZGC12039	1.5" (38 mm) Flat Face Grounding	Bronze	Eye Bolt	Class B/Grade 5	0.125-1.50	3.18-38.10	1.98	0.90
ZGC12040	1.5" (38 mm) Flat Face Grounding	Bronze	T Handle	Class B/Grade 5	0.125-1.50	3.18-38.10	2.16	0.98

RATCHET CUTTERS



The Slingco ACSR, CUAL, and Guy wire Ratchet Cutters are designed to cut hard cables cleanly and smoothly. The ratchet design provides leverage, increasing cutting force with each open and close of the handles. Makes cutting cable easier compared to manual cutters.

The handles' surfaces are designed to allow a firm, secure grip. The ratcheting action makes these cutters easy to operate even in limited spaces with just moderate pressure.

WARNING: DO NOT use on energized lines.

- Versions for cutting ACSR, Copper/Aluminum cable, and Small Guy Wire
- Smooth ratchet operation even in small spaces
- Strong blades for added durability

Slingco Part No.	Type	Capacity	Length	Weight
TCU09280	ACSR Ratchet Cutter	1/2" Soft Steel, 954 KCMIL ACSR	30" (762 mm)	12 lb (5.44 kg)
TCU09281	CUAL Ratchet Cutter	1,500 KCMIL Copper/Aluminum	30" (762 mm)	12 lb (5.44 kg)
TCU11807	Small Guy Wire Ratchet Cutter	1/2" EHS Guy Wire	29.5" (750 mm)	10.4 lb (4.7 kg)

BOLT CUTTERS



- Superior cutting performance
- Ergonomic comfort
- Fiberglass and steel handles
- Available in 18", 24", 30" and 36" lengths
- Versatile application for hard and soft materials

When your work calls for a reliable, powerful cutting tool, turn to Slingco Bolt Cutters. Designed and built for the demanding, daily use of utility professionals and contractors, these cutters deliver consistent performance.

Our hardened steel blades provide clean, powerful cuts across a wide variety of materials, including soft metals, chain, and rebar. The ergonomic handles are engineered for optimal grip and leverage, which helps reduce operator fatigue and improves control during tough applications.

With a variety of sizes available, Slingco has the right tool for the job, helping you work efficiently and safely.

WARNING: DO NOT use on energized lines.

Material	Slingco Part No.	Part No. Suffix/Length (in)	Hard Cut Capacity (HRC 48)	Soft/Medium Cut Capacity (HRC 19)	Weight
Steel	TCU15812	-18	9/32" (7 mm)	3/8" (10 mm)	3.4 lb (1.5 kg)
		-24	5/16" (8 mm)	7/16" (11 mm)	5.3 lb (2.4 kg)
		-30	3/8" (10 mm)	1/2" (13 mm)	8.4 lb (3.8 kg)
		-36	7/16" (11 mm)	9/16" (14 mm)	11.3 lb (5.1 kg)
Fiberglass	TCU15813	-18	9/32" (7 mm)	3/8" (10 mm)	3.4 lb (1.5 kg)
		-24	5/16" (8 mm)	7/16" (11 mm)	5.2 lb (2.35 kg)
		-30	3/8" (10 mm)	1/2" (13 mm)	8.5 lb (3.85 kg)
		-36	7/16" (11 mm)	9/16" (14 mm)	11.6 lb (5.26 kg)

MECHANICAL CRIMPING TOOL



Slingco's Mechanical Crimping Tools have been created to complete the variety of utility distribution service connections that need to be made on the line, pole, and home. Our crimping tools have been designed to provide reliable crimps installing full-tension or non-tension connectors.

Slingco's Mechanical Crimping Tool's 'D3' groove allows 'W' style die inserts for installing taps, splices, and terminal connectors. The 'W' die inserts lock securely and easily into place with the positive lock, spring-loaded die buttons. Slingco also offers a Mechanical Crimping Tool that accepts Kearney type dies.

Our Mechanical Crimping Tools also have ergonomic handles for comfortable use and maximum leverage when making critical connections.

- 'D3' groove allows 'W' style die inserts for installing taps, splices, and terminal connectors
- The Kearney seat tool accepts Kearney type dies also available from Slingco
- Ergonomic handles for comfortable use and maximum leverage
- Slingco Insert Dies available

Slingco Part No.	Tool Type	Crimping Force		Length		Weight		Die Style
		lb	kg	in	mm	lb	kg	
TCR7002	O Nose Die & D3 Seat	9,000	4,082	25.75	654	7	3.18	Accepts 'W' Style Dies
TCR7004	BG Nose Die & D3 Seat	9,000	4,082	25.75	654	7	3.18	Accepts 'W' Style Dies
TCR08735	16 mm / 5/8 in Nose Die & Kearney Seat	9,000	4,082	25.75	654	7	3.18	Accepts 'Kearney' Type Dies

REPLACEMENT W-DIE SETS (D3 INSERT)



Slingco Part No.	Slingco Ref.	Burndy Equiv.
TCR7020	S6-K840	WK840
TCR7021	S6-BG	WBG
TCR7022	S6-O	WO
TCR7023	S6-247	W247
TCR7024	S6-249	W249
TCR7025	S6-121	W121
TCR7027	S6-163	W163
TCR7028	S6-164	W164
TCR7029	S6-165	W165
TCR7030	S6-166	W166
TCR7031	S6-167	W167
TCR7034	S6-237	W237
TCR7036	S6-239	W239
TCR7037	S6-241	W241
TCR7038	S6-243	W243
TCR7039	S6-245	W245
TCR7047	S6-C	WC
TCR7058	S6-25RT	W25RT
TCR7059	S6-26RT	W26RT

REPLACEMENT 12 TON WH2/WH3 KEARNEY TYPE




Slingco Part No.	Slingco Ref.	Kearney Die Size
TCR09866	WH2/WH3 Die - D	D
TCR09867	WH2/WH3 Die - N	N
TCR09868	WH2/WH3 Die - O	O
TCR09870	WH2/WH3 Die - U	U
TCR09873	WH2/WH3 Die - 635	635
TCR09875	WH2/WH3 Die - 737	737
TCR09876	WH2/WH3 Die - 747	747
TCR09878	WH2/WH3 Die - 840	840
TCR09880	WH2/WH3 Die - 5/16	5/16
TCR09882	WH2/WH3 Die - 1/2	1/2
TCR09883	WH2/WH3 Die - 9/16	9/16
TCR09885	WH2/WH3 Die - 5/8	5/8
TCR09887	WH2/WH3 Die - 15/16	15/16
TCR09890	WH2/WH3 Die - 15/16H	15/16H
TCR09892	WH2/WH3 Die - 1-1/8-1	1-1/8-1
TCR09893	WH2/WH3 Die - 1-1/8-2	1-1/8-2
TCR09895	WH2/WH3 Die - 1-1/2H	1-1/2H
TCR09896	WH2/WH3 Die - 840H Wide	840H Wide

REPLACEMENT O-DIE SETS (KEARNEY SEAT)



Slingco Part No.	Slingco Ref.	Kearney Die Size
TCR10117	O Die - 1/2	1/2
TCR10118	O Die - 1/4	1/4
TCR10119	O Die - 3/8	3/8
TCR10120	O Die - 5/8-1	5/8-1
TCR10121	O Die - 5/16	5/16
TCR10122	O Die - 9/16	9/16
TCR10123	O Die - 11/16	11/16
TCR10124	O Die - 19/32	19/32
TCR10125	O Die - 620	620
TCR10126	O Die - 635	635
TCR10127	O Die - 747	747
TCR10128	O Die - 781	781
TCR10129	O Die - 840	840
TCR10130	O Die - 845	845
TCR10131	O Die - B	B
TCR10132	O Die - 3/16	3/16
TCR10133	O Die - T	T
TCR10134	O Die - D	D
TCR10135	O Die - J	J
TCR10136	O Die - K	K
TCR10137	O Die - O	O
TCR10138	O Die - P	P
TCR10139	O Die - 737	737

60 TON HYDRAULIC CRIMPING TOOL AND DIES

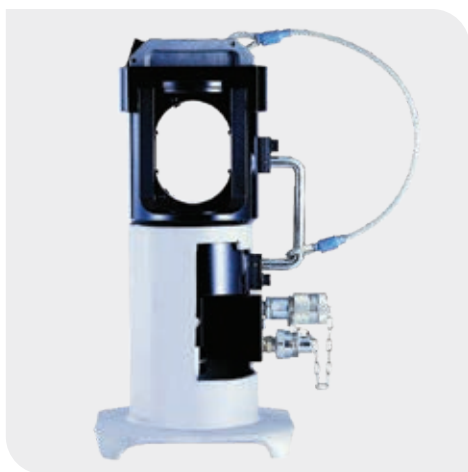

Slingco's Hydraulic Crimping Tools are designed to crimp sleeves and lugs on ACSR and ACAR transmission & distribution cables using dies that meet the standards of the utility industry. Our crimping tools are ideal for use in constructing substations and transmission lines.

The Single-Acting Crimping Tool uses hydraulic pressure to advance the ram into position, and an internal spring to return the ram to the original position. The Double-Acting Crimping Tool advances and returns the ram using hydraulic pressure alone, eliminating the possibility of the ram sticking or becoming jammed.

Our Hydraulic Crimping Tools come in a steel carrying case, and are lightweight and portable. Our crimping tools accept Slingco S60 Dies, or any shell-type dies used with Alcoa or Burndy 60-ton crimping tools.

- Accepts Slingco, Burndy L and Alcoa 6000 Series dies
- Steel Carrying Case Includes Ground Stand
- Lifting eye for hoist work
- For Crimping ACSR and ACAR transmission and distribution cables

Slingco Part No	Crimping Force	Operating Pressure	Action	Tool Weight	Oil Required
TCR7003	60 Tons	10,000 psi (700 bar)	Single-Action	47 lb	308 cc
TCR7018	60 Tons	10,000 psi (700 bar)	Double-Action	51 lb	314 cc

Replacement Dies for 60-Ton Hydraulic Crimping Tools



Repair kits

Slingco Part No.	Description	For Crimper No.
TCR09048	Seal Kit	TCR7003 60 Ton Single Action
TCR09937	Detent Kit	TCR7003 60 Ton Single and Double Action
TCR10356	Seal Kit	TCR7018 60 Ton Double Action

Slingco Part No.	Slingco Ref.	Alcoa Equivalent
TCR7067	S60-10SH	6010SH
TCR7068	S60-12SH	6012SH
TCR7069	S60-14SH	6014SH
TCR7070	S60-16SH	6016SH
TCR7071	S60-18SH	6018SH
TCR7072	S60-20SH	6020SH
TCR7073	S60-24SH	6024SH
TCR7074	S60-27SH	6027SH
TCR7075	S60-30SH	6030SH
TCR7076	S60-34SH	6034SH
TCR7077	S60-36SH	6036SH
TCR7078	S60-38SH	6038SH


Slingco Part No.	Slingco Ref.	Alcoa Equivalent
TCR7083	S60-40AH	6040AH
TCR7084	S60-44AH	6044AH
TCR7085	S60-48AH	6048AH
TCR7086	S60-52AH	6052AH
TCR7087	S60-56AH	6056AH
TCR7088	S60-60AH	6060AH
TCR7089	S60-64AH	6064AH
TCR7090	S60-68AH	6068AH
TCR7091	S60-72AH	6072AH
TCR7092	S60-76AH	6076AH
TCR7093	S60-80AH	6080AH
TCR7094	S60-84AH	6084AH
TCR7095	S60-88AH	6088AH
TCR7096	S60-92AH	6092AH
TCR7097	S60-96AH	6096AH

**When you don't need fancy.
You need 'finish the job'.**

We test to destruction here, to make sure it doesn't happen out there

slingco®

SAME DAY SHIPPING · NATIONAL DISTRIBUTOR NETWORK · HUGE INVENTORY

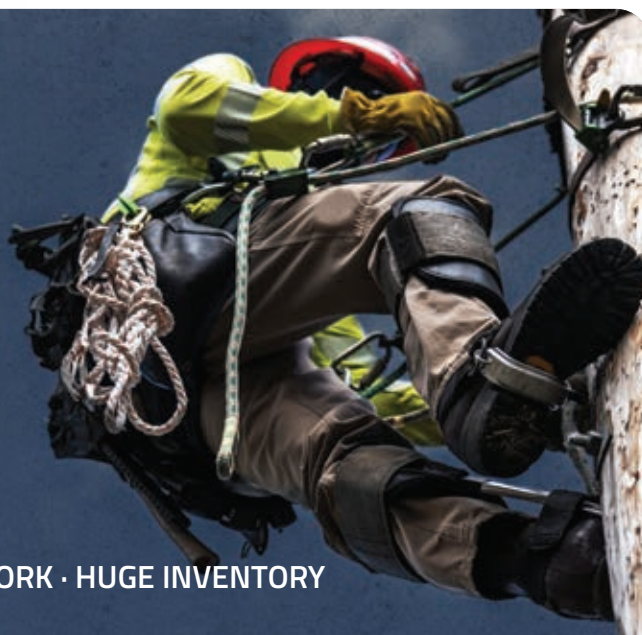

100 TON HYDRAULIC CRIMPING TOOL AND DIES



Slingco's 100 Ton Hydraulic Crimping Tool is ideal for use in constructing substations and transmission lines. This tool is designed to crimp sleeves and lugs on ACSR and ACAR transmission cables using dies that meet the standards of the utility industry.

The TCR0849 comes in a single-action configuration but can be converted to double-action functionality.

Crimping Range

- Copper: Up to 2.5" OD Sleeve
- Aluminum: Up to 3" OD Sleeve
- Steel: Up to 1.25" OD Sleeve

Comes with steel carrying case.

- Accepts U or shell type dies
- Steel Carrying Case
- Large handles for easy carrying
- Easy die installation

Slingco Part No	Crimping Force	Operating Pressure	Action	Tool Weight	Oil Required
TCR08490	100 Tons	10,000 psi (700 bar)	Single-Action	78 lb	422 cc

Replacement Dies for 100-Ton Hydraulic Crimping Tools



Slingco Part No.	Slingco Ref.	Alcoa Equivalent
TCR08544	S100-10SH	10010SH
TCR08545	S100-12SH	10012SH
TCR08546	S100-14SH	10014SH
TCR08547	S100-16SH	10016SH
TCR08548	S100-18SH	10018SH
TCR08549	S100-20SH	10020SH
TCR08550	S100-24SH	10024SH
TCR08551	S100-28SH	10028SH
TCR08552	S100-32SH	10032SH
TCR08553	S100-36SH	10036SH
TCR08554	S100-40SH	10040SH
TCR08555	S100-44SH	10044SH
TCR08556	S100-48SH	10048SH
TCR08557	S100-52SH	10052SH
TCR08558	S100-56SH	10056SH
TCR08559	S100-60SH	10060SH
TCR08560	S100-64SH	10064SH
TCR08561	S100-68SH	10068SH
TCR08562	S100-72SH	10072SH

Slingco Part No.	Slingco Ref.	Alcoa Equivalent
TCR08563	S100-42AH	10042AH
TCR08564	S100-44AH	10044AH
TCR08565	S100-46AH	10046AH
TCR08566	S100-48AH	10048AH
TCR08567	S100-07CD	10007CD
TCR08568	S100-08CD	10008CD
TCR08569	S100-09CD	10009CD
TCR08570	S100-10CD	10010CD
TCR08571	S100-11CD	10011CD
TCR08572	S100-12CD	10012CD
TCR08573	S100-13CD	10013CD
TCR08574	S100-14CD	10014CD
TCR08575	S100-15CD	10015CD
TCR08576	S100-16CD	10016CD
TCR08577	S100-17CD	10017CD
TCR08578	S100-18CD	10018CD
TCR08579	S100-19CD	10019CD
TCR08580	S100-20CD	10020CD

Repair kits

Slingco Part No.	Description	For Crimper No.
TCR09048	Seal Kit	TCR7003 60 Ton Single Action
TCR09937	Detent Kit	TCR7003 60 Ton Single and Double Action
TCR10356	Seal Kit	TCR7018 60 Ton Double Action



CAN'T FIND THE SPECIFICATION YOU NEED?

Call or email for full ranges plus custom manufacture options

888 685 9478

sales@slingco.com

CALL US TOLL FREE AT 888 685 9478

SHOTGUN STICKS



Slingco shotgun sticks are essential tools for live-line work, used by utility crews to safely apply and remove hot line clamps, operate cutouts and switches, apply temporary grounds, and handle energized jumpers and connectors.

- Universal end fitting on all models
- ASTM F711 and F1825 compliant
- Internal or external rod options
- Available in 4', 6', 8', 10', and 12' lengths
- Hook opens 90 degrees from handle

Slingco Part No.		Length		Weight		
		ft-in	m	lb	kg	
Shotgun Stick with Internal Operating Rod w/ Universal End						
HLT12963-4	4ft Internal Rod Shotgun Stick	4'10"	1.47	4.3	1.95	
HLT12963-6	6ft Internal Rod Shotgun Stick	6'10"	1.78	4.92	2.23	
HLT12963-8	8ft Internal Rod Shotgun Stick	8'10"	2.08	5.53	2.51	
HLT12963-10	10ft Internal Rod Shotgun Stick	10'10"	2.39	6.15	2.79	
HLT12963-12	12ft Internal Rod Shotgun Stick	12'10"	2.69	6.75	3.06	
Shotgun Stick with External Operating Rod w/ Universal End						
HLT12964-4	4ft External Rod Shotgun Stick	4'10"	1.47	4.5	2.04	
HLT12964-6	6ft External Rod Shotgun Stick	6'10"	1.78	5.22	2.37	
HLT12964-8	8ft External Rod Shotgun Stick	8'10"	2.08	6.15	2.79	
HLT12964-10	10ft External Rod Shotgun Stick	10'10"	2.39	7.03	3.19	
HLT12964-12	12ft External Rod Shotgun Stick	12'10"	2.69	7.78	3.53	

UNIVERSAL AND SWITCH HEAD STICKS






- Universal end fitting on all models
- ASTM F711 compliant
- Available in 4', 6', 8', 10', and 12' lengths
- Fits a wide range of lineman tools with a universal attachment
- Includes hanger for quick placement

Slingco's Universal and Switch Head Sticks are designed for safety and ease of operation in high-voltage environments. These hot sticks are trusted by linemen for performing switching, testing, grounding, and disconnect operations on live lines.

Made from high-dielectric strength fiberglass, each stick delivers dependable insulation while remaining lightweight and maneuverable.

Slingco Part No.		Length		Weight	
		ft	m	lb	kg
Universal Stick w/Universal Base					
HLT12961-4	4ft Universal Stick with Universal Base	4	1.22	2.26	1.03
HLT12961-6	6ft Universal Stick with Universal Base	6	1.83	2.00	1.36
HLT12961-8	8ft Universal Stick with Universal Base	8	2.44	3.77	1.71
HLT12961-10	10ft Universal Stick with Universal Base	10	3.05	4.52	2.05
HLT12961-12	12ft Universal Stick with Universal Base	12	3.66	5.27	2.39
Switch Head Stick w/Universal Base					
HLT12962-4	4ft Switch Head Stick with Universal Base	4	1.22	2.51	1.14
HLT12962-6	6ft Switch Head Stick with Universal Base	6	1.83	3.24	1.47
HLT12962-8	8ft Switch Head Stick with Universal Base	8	2.44	4.02	1.82
HLT12962-10	10ft Switch Head Stick with Universal Base	10	3.05	4.77	2.16
HLT12962-12	12ft Switch Head Stick with Universal Base	12	3.66	5.53	2.51

ISOLATING LINK AND SPIRAL LINK STICKS

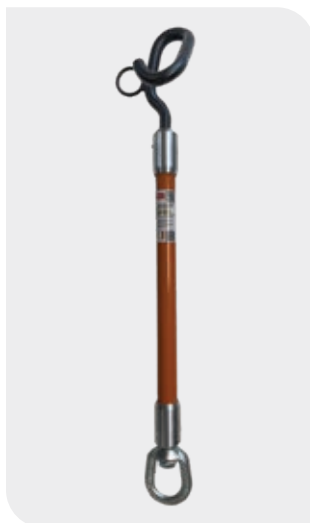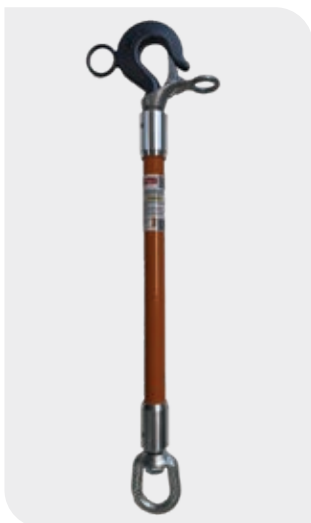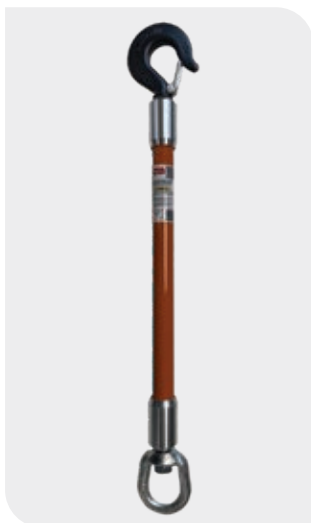

- Added protection when used properly with strap hoists on energized lines
- Compatible with most hoists
- Tested to ASTM F711 standards
- Isolating link sticks come as standard with swivel eye and choice of standard or hot stick operated hook
- Designed for quick connection and easy handling
- Rugged, utility-grade construction

Slingco's Isolating Link and Spiral Link Sticks provide enhanced electrical isolation when used with strap hoists on primary voltage lines. Built tough for utility crews, they're a reliable safeguard for energized work zones.

Slingco's **Isolating Link Sticks** are available in 6 inch (152.5 mm) and 12 inch (305 mm) lengths, each isolating link comes equipped with a swivel eye on one end and your choice of a standard hook or a hot stick operated hook, ensuring compatibility with various jobsite requirements.

Slingco's **Spiral Link Stick** has 12" (305 mm) of fiberglass and is 24" (610 mm) overall. It comes equipped with a swivel eye on one end and a spiral hook on the other.

Slingco Part No.	Description	Fiberglass length in (mm)	Working load limit lb (kg)
HLT13431-6	Isolating Link w/ Standard Hook & Swivel End (6")	6" (152.5)	4,000 (1,814)
HLT13431-12	Isolating Link w/ Standard Hook & Swivel End (12")	12" (305)	4,000 (1,814)
HLT13432-6	Isolating Link w/ Hot Stick Operated Hook & Swivel End (6")	6" (152.5)	4,000 (1,814)
HLT13432-12	Isolating Link w/ Hot Stick Operated Hook & Swivel End (12")	12" (305)	4,000 (1,814)
HLT13433	Spiral Link Stick (24")	12" (305)	2,000 (907)

RUBBER INSULATING BLANKETS



Slingco insulating rubber blankets provide essential electrical insulation for professionals working with high-voltage equipment. Designed for safety and durability, these blankets meet ASTM D1048 standards offering protection up to 36,000V AC.


Made from high-strength, ozone-resistant rubber, Slingco's Type II blankets provide flexibility in extreme temperatures. These blankets enhance workplace safety by protecting against electrical arcs, shocks, and flashes, making them ideal for utility workers.

- Protection up to 36KV
- Durable ozone resistant material
- Integrated eyelets for use with Slingco blanket magnets
- Compatible for use with Slingco blanket accessories

Slingco Part No.	Description	Blanket dimensions						Box dimensions				Blanket Weight		Box Weight	
		A		B		C		D		E					
		in	mm	in	mm	in	mm	in	mm	in	mm	lb	kg	lb	kg
PPE08434	Box of 6 Class 4 Type II 36" x 36"	36	910	36	910	37	950	10	250	9	240	9	4	54	24

RUBBER BLANKET ACCESSORIES

ZPE12136



ZPE10962

Used to hold insulating blankets and other types of rubber coverups in place, Slingco Blanket Clamp Pins, Pole Clamps and Blanket Magnets are constructed of ultraviolet stabilized fiberglass reinforced polymer.

The **Slingco Blanket Clamp Pin** has extra holes in the center of the body and is used to grip conductors and prevent linehose from sliding. Holes have also been placed in the handles to enable attachment of warnings, tags, and/or flags. The handles of the ZPE12136 pin are shaped to engage with the end ferrule of a clampstick (shotgun stick).

The **Slingco Pole Clamp** is meant to eliminate the use of tie wraps, bungee cords, tapes or any other items that can cause damage to insulated rubber products. With Slingco's unique tool handle lock system, the Pole Clamp can be set in an open position by engaging the handle lock. Once the product is in its intended location the lock can be released making installation easier.

The **Slingco Blanket Magnet** is designed to fit through the eyelets of an insulated blanket. Afterwards, the magnet along with the blanket can be placed over energized areas of transformers, switchboards and substations. Can be used with hot line tools.

Blanket Clamp Pin

Slingco Part No.	Length		Jaw Opening		Weight		Note
	in	mm	in	mm	oz	g	
ZPE10962	9.5	241	5	127	5	141.5	
ZPE12136	9.5	241	5	127	5.4	153	with Hot Stick Clip

Pole Clamp

Slingco Part No.	Length		Width		Jaw Opening		Weight	
	in	mm	in	mm	in	mm	lb	kg
ZPE11399	20.25	514.4	8.25	203.2	13.5	342.9	1.7	0.77
ZPE11398	28	711.2	11.5	291.2	19.75	501.7	2.2	1.0

Blanket Magnet

Slingco Part No.	Height		Diameter		Weight		Magnet rating	
	in	mm	in	mm	lb	g	lb	kg
PPE10785	2.4	60.6	1.75	44.4	0.2	90.7	120	54.4



ZPE11398



ZPE11399



PPE10785



Features:

- Durable Canvas construction
- Convenient flap closure
- Four Glove Bag options
- Combination Glove & Sleeve bags
- Sleeve only bag available

Protecting your gloves and sleeves is convenient with Slingco canvas bags. Bags feature a hook with latch for attaching to belt plus flap closure. Glove bags come in four sizes 12", 14", 16" and 18".

Compact and full-size Combination Glove & Sleeve bags are available. A Sleeve Bag option is available.

Slingco Part No.	Description	A - Width in (mm)		B - Height in (mm)		C - Depth in (mm)		Weight lb (kg)
GLOVE BAGS								
PPE11973	12" Glove Bag	7.78 (200)		11.73 (298)		2.36 (60)		0.4 (0.18)
PPE11974	14" Glove Bag	7.78 (200)		14.88 (378)		3.54 (90)		0.5 (0.23)
PPE11975	16" Glove Bag	7.78 (200)		16.85 (428)		3.54 (90)		0.6 (0.27)
PPE11976	18" Glove Bag	7.78 (200)		18.82 (478)		3.94 (100)		0.7 (0.32)
Slingco Part No.	Description	A - Width in (mm)	E - Glove Depth in (mm)	C - Glove Height in (mm)	B - Sleeve Width in (mm)	F - Sleeve Depth in (mm)	D - Sleeve Height in (mm)	Weight lb (kg)
GLOVE & SLEEVE BAGS								
PPE11977	Compact Glove & Sleeve Bag	7.78 (200)	3.15 (80)	15.67 (398)	7.78 (200)	3.15 (80)	19.21 (488)	0.9 (0.41)
PPE11978	Full-Size Glove & Sleeve	7.78 (200)	3.94 (100)	18.82 (478)	7.78 (200)	1.76 (70)	29.45 (748)	1.4 (0.64)
Slingco Part No.	Description	A - Width Top in (mm)		D - Width Bottom in (mm)		C - Depth in (mm)	B - Height in (mm)	Weight lb (kg)
SLEEVE BAGS								
PPE11979	Sleeve Bag	7.78 (200)		6.7 (170)		2.76 (70)	27.09 (688)	0.8 (0.36)



**When the job brings its worst,
you need tools that never quit.**

Products for cable and conductor
installation, support and protection

slingco

SAME DAY SHIPPING · NATIONAL DISTRIBUTOR NETWORK · HUGE INVENTORY

CALL US TOLL FREE AT 888 685 9478

HEAVY DUTY BANDING



CPC8780

Banding tool					
Description					Slingco part no.
Operates on bands widths 3/4", 1", and 1-1/4" and thickness of 0.044". Featuring a built-in cutter and a sliding block assembly.					CPC8780
Bands					
Width	Thickness	Average break strength	Pack quantity	Weight	Slingco part no.
1-1/4"	0.044"	5500 lb	100' roll in CARDBOARD BOX PACKAGING	17.2 lb	CPC8745
Buckles					
Width	Pack quantity		Weight	Slingco part no.	
1-1/4"	25/Box		3.2 lb	CPC8747	

Use the Slingco 1-1/4" 201 Stainless Steel Banding system to secure cables and other items to structures and poles where extra strength hold is required. The Heavy Duty Banding Tool allows you to easily tighten and secure any length band loop.

Perfect for use with concrete utility poles. The extra width of this band provides stronger tensile strength than the 3/4" band as well

as a wider holding surface. Useful in many application environments including Utility, Marine and manufacturing where securely attaching cables, hoses or tubes onto a cylindrical object is needed. 100 ft. band roll comes in easy to stack and store cardboard box.

Giant buckles are made of 201 Stainless Steel and designed for use with 1-1/4" wide bands.

POLE BAND SYSTEM



The Slingco Pole Band System includes bolt clamps and mounting plates and 3/4" or 1-1/4" banding. Packages with different band lengths make this system flexible for varying pole sizes. Just measure the circumference of the pole and add a minimum of 6" and select the next size up. Securely mount hardware to cylindrical or square wooden, metal or concrete poles.

The system includes aluminum hardware extrusions, bolt hardware and pre-cut lengths of stainless steel banding. The system is easy to attach and tighten onto poles. The optional mounting plates allow quick attachment of hardware.

Extrusions and mounting plates available separately for use with rolls of banding cut to length in the field.



Slingco Part No.	Description	Pack Quantity	Pre-Cut Band Length		Band Width	
			in	mm	in	mm
PRE-ASSEMBLED EXTRUSIONS AND BANDING						
ZPC10646-48	Two extrusions and pre-cut band	12	48	1,219	0.75	19
ZPC10646-72	Two extrusions and pre-cut band	12	72	1,829	0.75	19
ZPC10647-48	Two extrusions and pre-cut band	12	48	1,219	1.25	31.75
ZPC10647-72	Two extrusions and pre-cut band	12	72	1,829	1.25	31.75
BOLT CLAMPS AND MOUNTING PLATES						
ZPC10646	0.75" (19 mm) Bolt Clamp	12	N/A	N/A	0.75	19
ZPC10647	1.25" (31.75 mm) Bolt Clamp	12	N/A	N/A	1.25	31.75
ZPC10648	Mounting Plate with 2" (50.8 mm) Bolt	12	N/A	N/A	0.75 or 1.25	19 or 31.75
ZPC10910	Mounting Plate with 3" (76.2 mm) Bolt	12	N/A	N/A	0.75 or 1.25	19 or 31.75
Slingco Part No.	Description	Pack Quantity	Pre-Cut Band Length		Band Width	
			in	mm	in	mm
BANDING (100 FT ROLLS)						
CPC8743	201 SS banding	100 ft in BOX	N/A	N/A	0.75	19
CPC8744	201 SS banding	100 ft in PLASTIC TOTE	N/A	N/A	0.75	19
CPC8745	201 SS banding	100 ft in BOX	N/A	N/A	1.25	31.75

LIGHT DUTY BANDING



Use Slingco 3/4" wide 201 Stainless Steel, or the 1/2" wide 316 Stainless Steel, banding system to secure cables and other items to Utility poles, Light stands or other structures. The Light Duty Banding Tool allows you to easily tighten and secure any length band loop.

Slingco offers rolls of 3/4" and 1/2" wide banding material in 100 foot lengths. These 100 foot band rolls come in two convenient packages –

Banding tool					
Description					Slingco part no.
Operates on band widths 1/4" to 3/4" and thickness up to 0.030". Tool has a built in cutter with PVC coated handle for comfort and sliding block assembly with spring loaded lever.					CPC8748
Bands					
Width	Thickness	Avg break strength	Pack quantity	Weight	Slingco part no.
3/4"	0.030"	2250 lb	100' roll - Cardboard Box	7.7 lb	CPC8743
3/4"	0.030"	2250 lb	100' roll - Red Plastic Tote	7.7 lb	CPC8744
1/2"	0.030"	1200 lb	100' roll - Cardboard Box	5.1 lb	CPC08325
1/2"	0.030"	1200 lb	100' roll - Blue Plastic Tote	5.9 lb	CPC08326
Buckles					
Width	Pack quantity		Weight		Slingco part no.
3/4"	100/Box		3.7 lb		CPC8746
1/2"	100/Box		2.5 lb		CPC08327

standard stack-and-store cardboard packaging, or an easy to carry red plastic tote for the 3/4" and a blue plastic tote for the 1/2".

The buckles used to secure these bands are made of 201 Stainless Steel and designed for 3/4" width bands, and 316 Stainless Steel designed for 1/2" bands.



HOLD DOWN WEIGHTS



Slingco's Hold Down Weights for transmission work are made from ductile cast iron with corrosion resistant zinc rich organic paint finish. 1" center through-hole rod mounting design for easy and secure deployment.

Slingco Part No.	Weight (lb)	Dimensions (in)
HMI5126	67	7.5 Ø x 6
HMI5127	100	9 Ø x 6

POLE STAPLES



Slingco Staples are used to securely hold grounding and bonding wires while insulating the wire from the staple. The insulation minimizes TV and Radio Frequency Interference by preventing sparks. The insulator ensures that current cannot flow into the staple that could cause fires on the pole. The insulator also acts as a barrier to corrosion caused by contact with ground wires.


- Securely hold grounding and bonding wires
- Insulated inserts
- Barbed and non-barbed styles

Slingco Part No.	Description	For Use With Wire
ZMI6326	30mm (1.5") x 6.35mm (0.25") x 3.75mm (0.148") Galvanised barbed wood staple with TVI insulator	#6, #8 & #10 solid CU wire
ZMI6327	50.8mm (2") x 14.3mm (9/16") x 6.35mm (0.25") Galvanised bonding wire staple with TVI insulator	#4 CU wire

POLE LINE SUSPENSION CLAMPS



Slingco suspension conductor clamps provide safe and quick installation and removal of the conductor when attached to the insulator. A single fastener fully opens and closes the jaw. The clamps come in a variety of sizes to accommodate conductors from 0.16 to 1.50 inch diameter, and loadings of up to 18,000 lbs. To prevent loss, all moving parts of the clamps are captive. Suitable for hot line work.

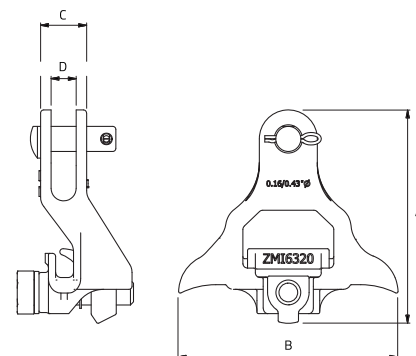

Depending on size, the clamps are either made from heat treated aluminum alloy 356-T6 or ductile iron 60-45-15 and hot dip galvanized for corrosion resistance.

Slingco Part No.	Range (in)	Material	A (in)	B (in)	C (in)	D (in)	Load (lb)
ZMI6320	0.16 – 0.43	Ductile iron	5.36	5.51	1.16	0.63	10,000
ZMI6321	0.30 – 0.70	Ductile iron	8.03	6.34	1.38	0.63	18,000
ZMI6322	0.50 – 0.687	Aluminum alloy 356-T6	6.22	6.89	1.61	0.63	12,000
ZMI6323	0.68 – 1.00	Aluminum alloy 356-T6	8.37	6.89	1.73	0.63	12,000
ZMI6324	1.00 – 1.313	Aluminum alloy 356-T6	9.53	6.97	1.74	0.63	12,000

Be informed. Be safe.

YOUR QUICK ACCESS GUIDE

At Slingco we're obsessed with quality and safety. And to that end, keeping you informed is key. We make finding information for our products quick and easy. You'll find QR codes on products so viewing manuals is simple while in the field with your mobile device.

Don't hesitate to contact our network of distributors or Slingco directly for information. We're here to help!



View our complete product range at slingcoamerica.com/products/


See all our manual and brochure downloads at slingcoamerica.com/resources/



Downloadable product instruction manuals and safety guides ensure you get the best from Slingco products while staying safe.



Scan the QR code to see our growing collection of online manuals.

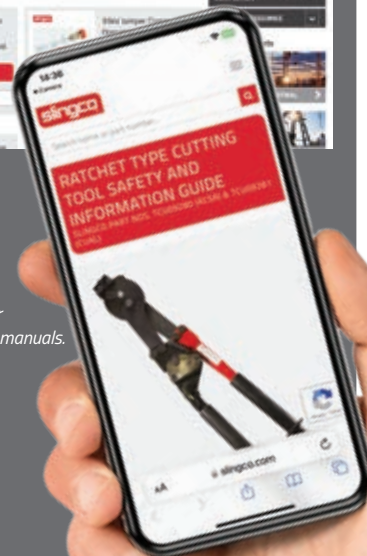

ANCHOR BUSTER



Item	Slingco Part No.	Description	Qty
1	SAE14487	Anchor Buster	1
2	SAN12680	Replacement Anchor Busting Tamping Head	1
3	SAE14788	Replacement hardware	1

Built to withstand heavy-duty field use, the Slingco Anchor Buster is a 10-foot expanding and tamping bar designed to bust open expanding anchors and serves as a tamping tool to pack dirt back into place.

Made from rugged materials and tested for repeat impact, the Anchor Buster is a reliable, manual solution for anchoring and tamping tasks where precision and strength are required.

ANCHOR ROD PULLING EYE



The Slingco anchor rod pulling eye installs on 0.5" to 1.25" anchor rods and is used in conjunction with hoist to tension and install pole guy wires. Attach guy wire to ground anchors safely.

Slingco Part No.		Capacity		Load rating		Weight	
		in	mm	lb	kg	lb	kg
SAE12540	Hot Dip Galvanized Steel	0.5-1.25	12.7 - 31.7	6,000	2721	5.3	2.4

POLE LIGHT KIT



Slingco's 360 degree, high visibility Pole Light Kit includes heavy duty frame, ratchet strap, two flags, two 'D' size batteries, and a 360 degree LED pole light with two settings (flash and solid). Slingco recommends that you comply with all DOT transportation regulations for your state. This product is intended to be temporary. Inspect item before each use for wear, tear, or damage of any kind.

The Slingco Pole Light Kit has a QR code on the product so its manual is always available.

Features:

- Lumens: 15,000 MCD

Available spares include:

- Flags (in pairs): TPE12579
- Ratchet straps: TPE12670
- Light (Red): TPE12589
- Light (Amber): TPE12409

Slingco Part No.	Description
TPE12606-A	Pole Light Kit with AMBER light
TPE12606-R	Pole Light Kit with RED light
TPE12606-2F	No Light, w/2 Flags
TPE12606-3F	No Light, w/3 Flags
SPARE PARTS	
TPE12409	AMBER Light for pole light kit
TPE12589	RED Light for pole light kit
TPE12579	Flags (pair)
TPE12670	Ratchet straps



10K DRIVE WRENCH ASSEMBLY

EFFICIENT INSTALLATION OF SCREW ANCHORS

Drive Wrench System for installation of screw anchors. Component and options include:


- Orange Drive Wrench (#SAE09639)
- Yellow Drive Wrench (#SAE08666)
- Square Shank Anchor Tool (#SAE11132)
- Drive Wrench Lock (#SAE10425)
- 2.5 in Hex Kelly Bar Adapter (#SAE10486)
- 2.625 in Hex Kelly Bar Adapter (#SAE10427)
- 1.5 in Square Shank Bolted Assembly (#SAE13513)

Slingco's 10k Drive Wrench Assembly is a tool system for the installation of screw anchors.

Designed to connect the square anchor of a drive motor or screw anchor to the hexagonal Kelly Bar of a bucket truck. System options include Drive Wrenches to suit different sized anchor rods; a Drive Wrench lock; two Kelly Bar Adapters to fit the most common drive bar dimensions (2.5 in and 2.625 in) and square shank adapter and tool assembly.

The Drive Wrench Lock attaches to the Kelly Bar Adapter and makes the installation of the Anchor Rod much easier. The three position rings of the lock assembly ensure easy capture of the Drive Wrench and Anchor Rod, holding them securely while under torque and releasing them when needed.

The Drive Wrenches are designed to allow Anchor Rods to telescope inside, and secure to, the Drive Wrench Lock. The Drive Wrench transfers the torque from the Drive motor to the Screw Anchor, and are rated to 10,000 ft-lb.

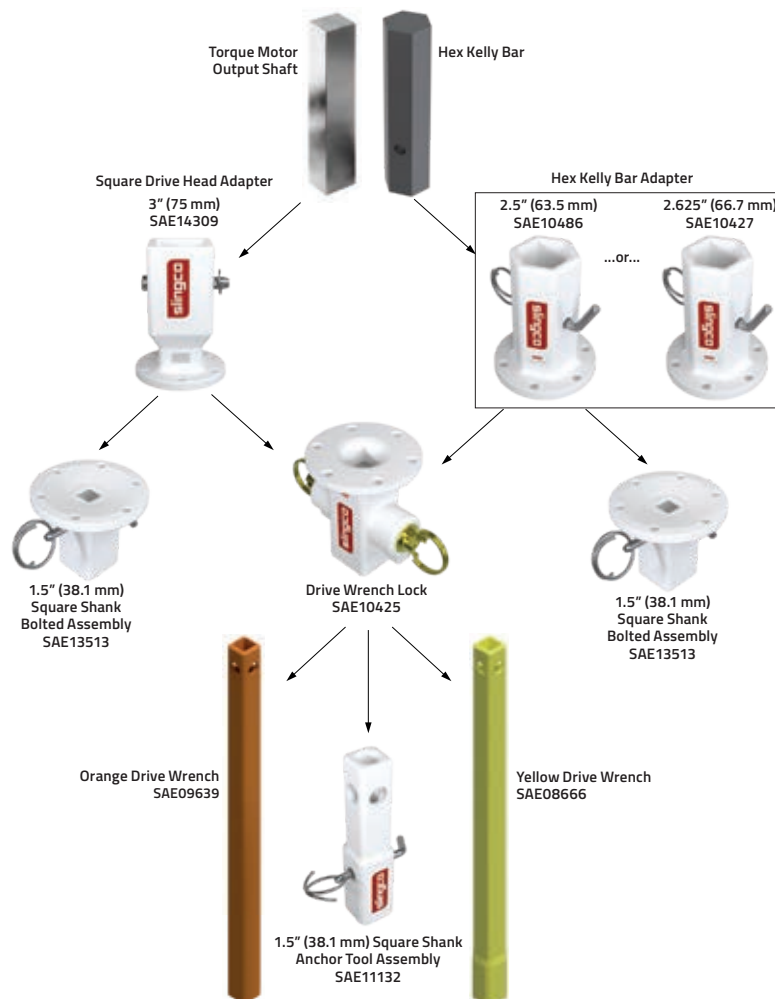


HEX KELLY BAR ADAPTERS



Slingco's Hex Kelly Bar Adapters are a key component in the Drive Wrench Assembly. The adapters are used to connect the Drive Wrench Lock Assembly to the Kelly Bar of the bucket truck. There are two versions available which fit the most common drive bar dimensions.

Slingco Part No.	Kelly Bar Shape	Adapter dimensions						Weight each	
		X		Y		Z		lb	kg
SAE10486	HEX	2.5	63.5	4.25	108	8.25	210	16.3	7.39
SAE10427	HEX	2.625	66.7	4.25	108	8.25	210	16.7	7.57

DRIVE WRENCH LOCK ASSEMBLY



SAE10425




SAE13513

Slingco's Drive Wrench Lock Assembly attaches to the adapter and makes the installation of the anchor rod much easier. The three-position rings allow for easy capture of the Drive Wrench and the anchor rod, holding them securely while under torque, and releasing each when needed.

Slingco Part No.	Description	Weight	
		lb	kg
SAE10425	Drive Lock Assembly	18.4	8.35
SAE13513	1-1/2" Square Shank Bolted Assembly	12.3	5.58

SQUARE HEAD ADAPTER

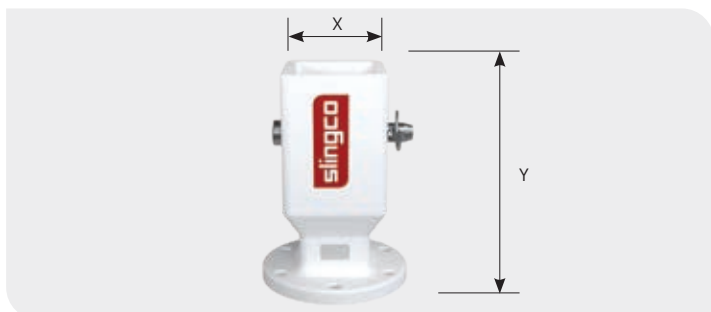

Slingco's Square Head Kelly Bar Adapters are a key component in the Drive Wrench Assembly. The adapters are used to connect the Drive Wrench Lock Assembly to a square torque motor output shaft.

Slingco Part No.	Kelly Bar Shape	Description	Adapter dimensions				Weight	
			X		Y		lb	kg
SAE14309	SQU	76 x 76 mm Square Head Adapter	3	76	9.4	240	16.5	7.5

DRIVE WRENCHES



Slingco's Drive Wrenches are designed to allow anchor rods to telescope inside them, and securing to the Drive Wrench Lock Assembly. The Drive Wrench transfers the torque from the drive motor to the screw anchor. Rated to 10,000 ft-lb of torque, Slingco's Drive Wrenches are tough and can handle anchor installs in tough environments.

Slingco Part No.	Description	Hub Size		Shaft Size	
		in	mm	in	mm
SAE09639	10,000ft-lb Orange Drive Wrench	2.25	57	1.375	35
SAE08666	10,000ft-lb Yellow Drive Wrench	2.5	63.5	1.5	38
Slingco Part No.	Description	Weight			
		lb		kg	
SAE11132	7,000ft-lb 1-1/2" Square Shank Anchor Tool Assembly			11.4	5.17
57 lb (28.85 kg) is the weight of each Drive Wrench					

57 lb (28.85 kg) is the weight of each Drive Wrench

POLE PULLER



Slingco's pole puller is a must have to comply with today's safe working practices, reducing the potential for boom damage and greatly reducing the potential of personal injury.

The pole puller is easily assembled and disassembled. The standard pole puller system is composed of four pieces and the deluxe system six pieces. These configurations make the Slingco pole puller easy to handle and lighter weight than typical units on the market.

The back plate weldment has angled teeth to increase hold on the pole during extraction. Slingco's pole puller offers a low point of attachment making it easy to remove even broken or cut poles. Convenient handles on the pole puller body make inserting over cylinder easy and pinch-free.

The Slingco Deluxe Pole Puller system includes the pole puller pad and back plate weldment. The pole puller pad has studs which keep the base plate in the optimum position when pulling poles.



Slingco Part No.	Description	Max. Operating Pressure		Recommended Flow Rate		Lift at Max. Pressure		System Total Weight	
		PSI		GPM		lb	kg	lb	kg
TPE09386	Deluxe Pole Puller System	2,800		4 – 8		50,120	22,734	157	71.2

DELUXE Pole Puller System consists of: hydraulic cylinder*, chain, base weldment, swivel assembly PLUS back plate weldment, and pole puller pad.

*hydraulic cylinder comes with flush face fittings installed.

TPE10551	Standard Pole Puller System	2,800		4 – 8		50,120	22,734	128	58
----------	-----------------------------	-------	--	-------	--	--------	--------	-----	----

STANDARD Pole Puller System consists of: hydraulic cylinder*, chain, base weldment, swivel assembly.

*Hydraulic cylinder comes with flush face fittings installed.

Slingco Part No.	Description	Weight	
		lb	kg
TPE09378	Pole Puller Pad	23	10.43
TPE09367	Back Plate Weldment	6	2.72
TPE09371	Pole Puller Chain	14	6.4
TPE10552	Swivel Weldment Assembly	35	15.9
TPE10491	Hydraulic Cylinder	57	25.9
TPE11999	Base Weldment	22	10

NOTE: See Pole Puller manual for complete parts breakout.

POLE STAND



Slingco's pole stands are lightweight and compact making them easy to place, remove, and store on your truck or jobsite. The support leg's swing-and-lock design make moving and storing the Slingco pole stand a breeze. The swing lock captures the legs in closed or open position for added safety.

- Lightweight and compact
- Quick swing-and-lock legs
- Positions poles for safe and comfortable framing

The pole stand positions the pole at an optimal height for easy and safe framing. The standard pole stand's capacity of 9,000 lb makes it capable of handling the majority of wood distribution poles. For larger poles the large pole stand has a capacity of 12,500 lb. The curved cradle allows for safe rotation of poles for proper framing positioning.

The pole stand's high visibility and durability make it a proven choice for any work location or environment.



Slingco Part No.	Description	Capacity		Height		Width		Weight	
		lb	kg	in	cm	in	cm	lb	kg
TPE09682	Pole Stand	9,000	4,082	23.75	60.33	30	76.2	32	14.5
TPE13932	Large Pole Stand	12,500	5,670	23.18	58.88	30.6	12	34.6	15.7

DIRT TARPS



Slingco's range of heavy-duty, re-usable dirt tarps have been created with safety in mind. Keeping workers out of awkward, injury-prone positions is better for their long-term health and the company's bottom line. Dirt tarps have become a must-have product at utility construction sites. You can find Slingco Dirt Tarps being used at pole change-outs, transformer terminations, pedestals, as well as underground gas, telephone, and other underground utility applications.

In fact, with the ability to move crushed rock, sand, dirt, damp cement, dig spoils, and other contaminated soil, there are few reasons NOT to have a Slingco Dirt Tarp on the project!

Slingco Part No.	Tarp Dimensions		Maximum Capacity	
	ft	mm	lb	kg
ZLD10015	10 x 10	3,048 x 3,048	5,000	2,267
ZLD10016	8 x 8	2,438 x 2,438	5,000	2,267
ZLD10793	7 x 7	2,133 x 2,133	4,000	1,814
ZLD10792	6 x 6	1,828 x 1,828	4,000	1,814

DISTRIBUTION STRINGING BLOCKS & ACCESSORIES LIGHTWEIGHT, RELIABLE AND VERSATILE

DISTRIBUTION STRINGING BLOCKS

- Distribution Stringing Blocks
- Crossarm Brackets
- Y-Ball and U-Ball Clevises
- Insulator Bracket

Distribution Stringing Blocks


Slingco offers two lightweight, rugged, reliable and durable aluminum distribution stringing blocks.

Used in conjunction with purpose-designed accessories, the Slingco 7" blocks have proven extremely popular with utility operators and their contractors for the exceptional versatility they offer in terms of installation applications and locations.

Their low-friction bearings deliver high efficiency, which helps to maximize stringing distances while minimizing pulling tensions and reducing loads on stringing equipment.



ZAB4004

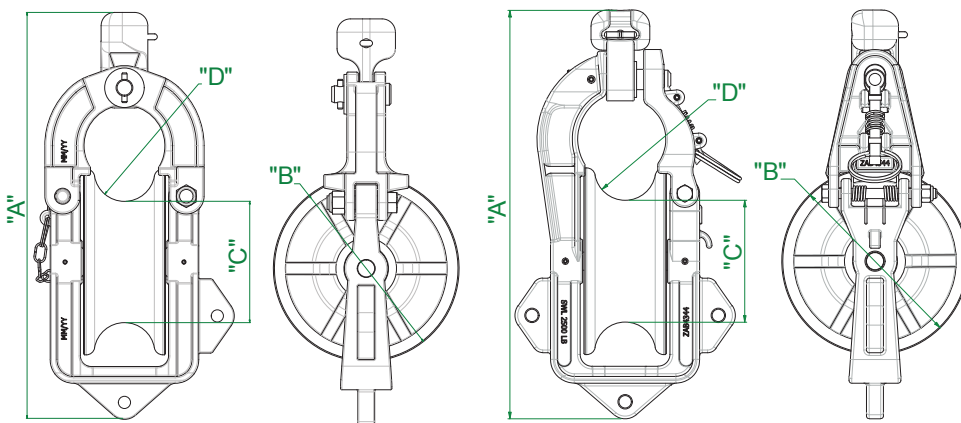

ZAB4004

ZAB4344

Slingco Part No.	Description	Weight		WLL		Height "A"		Sheave Diameter "B"		Bottom of Groove "C"		Groove Radius "D"	
		lb	kg	lb	kg	in	mm	in	mm	in	mm	in	mm
ZAB4004	7" Pin Gate Aluminum Distribution Block	8.3	3.76	2,500	1,134	15.125	384.2	7	177.8	4.5	114.3	2.25	57.15
ZAB4344	7" Spring Gate Aluminum Distribution Block	9.2	4.17	2,500	1,134	15.344	389.74	7	177.8	4.5	114.3	2.25	57.15



ZAB4344

CROSSARM BRACKETS



ZMI10017



ZMI10018

CROSSARM RATCHET STRAP BRACKET



ZMI14338

INSULATOR BRACKETS



ZMI14345



ZMI14346

Y BALL CLEVIS



CSB09094

U BALL CLEVIS



CSB09095

Crossarm Brackets

Slingco Crossarm Brackets are designed for easy attachment of distribution blocks to crossarms. Securely mount distribution blocks to crossarms at three convenient angles based upon the needs of your pull. Quick release pin for attachment of distribution block. Fits most crossarm sizes.

Two styles available: full frame (ZMI10018) and partial frame (ZMI10017).

Crossarm Ratchet Strap Bracket

Used in conjunction with Slingco's 7" Stringing Blocks, the Crossarm Ratchet Strap Bracket (ZMI14338) can be mounted on wooden, fiberglass or composite crossarms, as well as concrete, wood, or steel poles. This versatile crossarm bracket with ratchet strap allows stringing blocks to be mounted horizontally or vertically.

Strap length is 60" (1500 mm), with a WLL of 2500 lb (1,133 kg).

Insulator Bracket

Used in conjunction with Slingco 7" Stringing Blocks, the Slingco Insulator Bracket with bolt (ZMI14345) or handle (ZMI14346) fit insulators with a neck range of 2-1/8" – 3-1/2". The Slingco insulator brackets have a WLL of 2,500 lb (1,133 kg) in the vertical direction and 1,500 lb (680 kg) in the horizontal direction.

Slingco Part No.	Description	WLL	
		lb	kg
ZMI10017	Partial Frame Crossarm Bracket	2,500	1,133
ZMI10018	Full Frame Crossarm Bracket	2,500	1,133
ZMI14338	Crossarm Ratchet Strap Bracket	2,500	1,133
ZMI14345	Insulator Bracket with Bolt	2,500	1,133
ZMI14346	Insulator Bracket with Handle	2,500	1,133
CSB09094	Y Ball Clevis	30,000	13,600
CSB09095	U Ball Clevis	30,000	13,600

GUY WIRE DISPENSER



Slingco's Guy Wire Dispenser saves linemen time, effort, and keeps them safe. Efficiently dispense and take up excess guy wire from a permanently mounted source. Operation of the dispenser is kept smooth thanks to the high load sealed ball bearing. The Guy Wire Dispenser is constructed of high strength steel coated in a durable black and yellow finish to enable the unit to endure the harsh outdoor environment. Easy to operate release knobs allow for quick and easy loading and unloading.

- Handles Guy Wire OD up to 1/2"
- Permanently mounts to truck or other surface
- Smooth pay-out operation thanks to high load sealed bearings

Slingco Part No.	Max. Wire Size		Coil Width Capacity		Coil Diameter Range		Weight	
	in	mm	in	mm	in	mm	lb	kg
ZWM09207	0.5	12.7	4.75	120	22-31	559-787	45	20.5
ZWM12496	0.5	12.7	8.75	222.25	32 - 36	813-914	54	24.49
Slingco Part No.	Description							
ZWM09741	Guy Wire Knob Replacement Kit - contains all parts needed to replace securement knobs.							

TRIPLEX DISPENSER



The Slingco Triples dispenser is designed to be permanently mounted for the efficient dispensing of triplex. Slingco's triplex dispenser is designed to keep linemen safe while saving time and effort.

Constructed of high strength steel coated in a durable black and yellow finish allows the unit to endure the harsh outdoor environments. The high load sealed ball bearing keeps operation and rotation smooth.

Easily adjust break tension with a 3/4" wrench. Simple pull knob operation for loading of triplex coils.

Slingco Part No.	Coil OUTSIDE Diameter Range		Coil INSIDE Diameter Range		Coil Width Capacity		Weight	
	in	mm	in	cm	in	cm	lb	kg
ZWM09903	26 - 32	66 - 81.3	14 - 20	35.5 - 50.8	10.25	26	54	24.5
ZWM12698	Repair Kit - contains parts needed to replace securement knobs							

**Helping you cut through the job,
not wrestle with the tools**


Products for cable and conductor installation, support and protection

slingco


SAME DAY SHIPPING · NATIONAL DISTRIBUTOR NETWORK · HUGE INVENTORY



REEL LIFTER

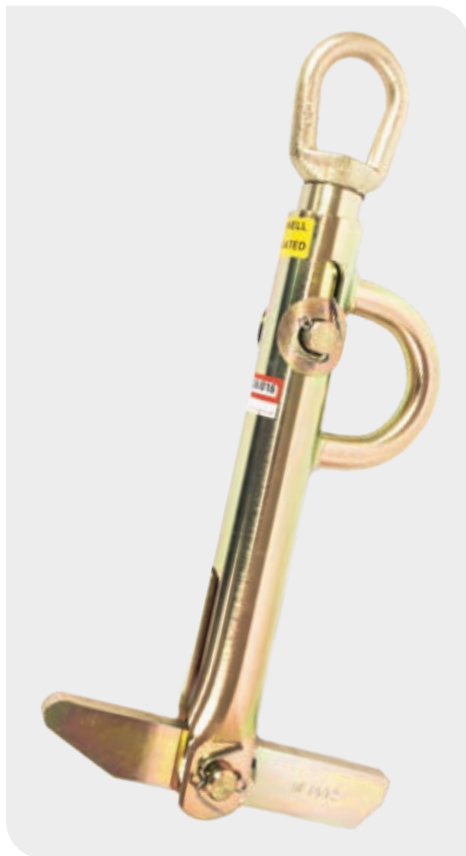

The Slingco Reel Lifter is a high capacity, compact unit that allows users in the construction industry to safely load, transport, and dispense wire and/or cable on-site. It is also used in many industrial applications to make moving and relocating reels in a warehouse easy. Now a task that normally used a team of three or four people can be done with just one, allowing the crew to operate more efficiently!

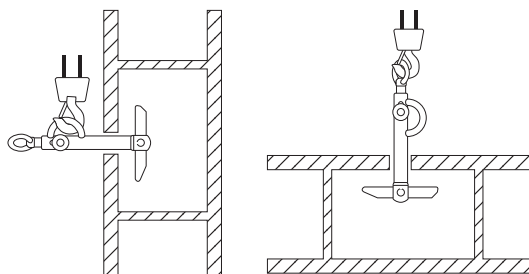


Makes handling large cable reels quick and easy, on-site or in warehouses.


- Rugged construction to lift and upend reels
- Easy rotation to unroll cable
- Counterweighted bottom arm for easy insertion in reel
- Side lifting eye allows reels to be flipped into a non-rolling position
- Repair kits available
- Complies with ASME B30.20.1

Reel Lifter					
Slingco Part No.	Arbor Hole Min. (ins)	Arbor Hole Max. (ins)	Capacity (lb)	Weight (lb)	Length (ins)
ZLD08729	2	4	3,000	6.50	16 1/8
ZLD09186	3	6	5,000	14.50	21 1/8
ZLD10807	3.25	6	12,000	32.33	30.53
Reel Lifter Repair Kit					
ZLD09708	3,000lb factory repair kit with extension springs, cable assemblies and all necessary pins for replacement of the interior cable system. Suitable for ZLD08729.				
ZLD09707	5,000lb factory repair kit with extension springs, cable assemblies and all necessary pins for replacement of the interior cable system. Suitable for ZLD09186.				

HAND LINE TOOLS

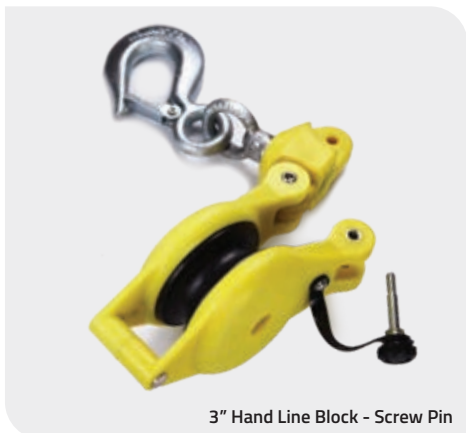


3" Hand Line Block - Screw Pin

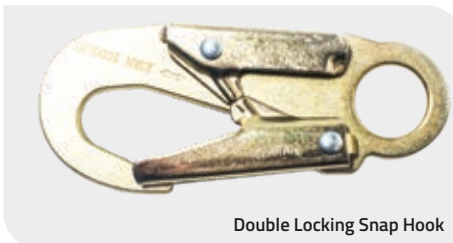

Double Locking Snap Hook



Hand Line Hook

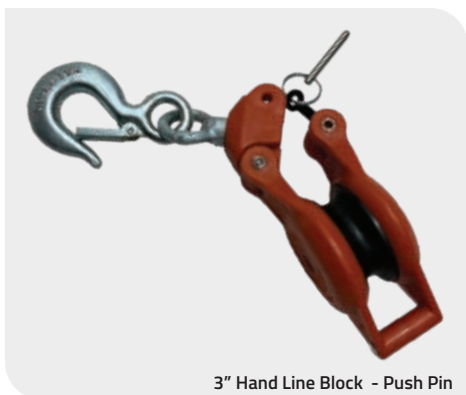

3" Hand Line Block - Push Pin



Hand Line Hook - Meat Hook

Slingco's Hand Line Tools include a 3" (76.2mm) nylon fiberglass block, with a safe working load limit of 1,000 lb (453.59 kg), and a double locking snap with a safe working load limit of 5,000 lb (2267.96 kg).

Our 3" (76.2mm) Hand Line Block's sheave can accommodate a 0.625" (15.875 mm) diameter rope, and operates smoothly on the 0.5" (12.7 mm) diameter axle and swivel bearings. The side opening feature allows quick access to remove the hand line.

The Hand Line Hook is made of manganese bronze, and is made for use with 0.5" (12.7 mm) rope.

Slingco Part No.	Description	Working Load Limit	
		lb	kg
ZAB8725	3" Hand Line Block (Screw Pin)	1,000	453.59
ZAB8725-P	3" Hand Line Block (Push Pin)	1,000	453.59
ZAB8725-M	Hand Line Block (with Meat Hook)	1,000*	453.59*
HMI8556	Double Locking Snap Hook	5,000	2,267.96
HMI6502	Hand Line Hook	272	123.38

*Contact Slingco

CALL US TOLL FREE AT 888 685 9478

STRAP HOISTS

SPLICE, DEAD END, AND SAG LINES QUICKLY AND EFFICIENTLY

- ASME B.30.21 compliant
- 125% working load tested
- Interlocking pawl lever system
- Replacement parts readily available
- Hot stick operable version

Linemen use the Slingco Strap Hoist to splice, dead end, and sag lines. The Slingco strap hoist features an easy to operate pressure die cast drum for a professional look and smooth finish to minimize the risk of strap fraying.

The hoist also features an interlocking pawl system with dual pawl springs for controlled tightening and releasing of the strap which ensures that the hoist is engaged while in use. The fiberglass handle assembly color matches to each colored strap to ensure use of appropriate handle with correct hoist.

The straps are Hi-Vis bright green, blue, and yellow in color for easy visibility and identification. Strap hoists may be operated in single line or double line modes for capacity required.



The strap hoist has three operations: lift/pull, lower/release, and freewheeling. For information while in the field, use the QR code found on Slingco products to quickly reach the user manual as well as helpful safety information while mobile. All strap hoists comply with ASME B.30.21 standard and all units are tested to 125% of load.

2K STRAP HOIST



ZLH14321



ZLH14447



VIEW PRODUCT MANUAL


The Slingco 2K strap features a Hi-Viz yellow strap for easy identification. In single line mode capacity is 1K. When used in double line mode capacity is 2K. The 2k Strap Hoist has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. For information while in the field, use the QR code on Slingco products to quickly reach manual and helpful information on your mobile.

Slingco Part No.	Type	SINGLE LINE								DOUBLE LINE							
		Capacity		Lift		Headroom		Capacity		Lift		Headroom		Tool weight			
		lb	kg	ft	m	in	mm	lb	kg	ft	m	in	mm	lb	kg		
ZLH14321	Standard	1,000	453.6	9	2.7	15.5	393.7	2,000	907	4.25	1.3	18.5	469.9	8.46	3.84		
ZLH14447	Hot stick operated	1,000	453.6	9	2.7	15.5	393.7	2,000	907	4.25	1.3	18.5	469.9	9.04	4.10		

3K STRAP HOIST



ZLH10504

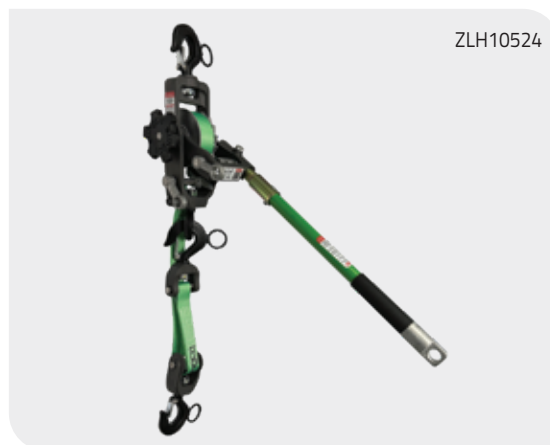

ZLH10524



VIEW PRODUCT MANUAL


The Slingco 3K strap features a Hi-Viz green strap for easy identification. In single line mode capacity is 1.5K. When used in double line mode capacity is 3K. It has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling.

Slingco Part No.	Type	Capacity		SINGLE LINE				Capacity		DOUBLE LINE				Tool weight	
		lb	kg	Lift		Headroom		lb	kg	Lift		Headroom		lb	kg
ZLH10504	Standard	1,500	680	9	2.7	17.5	444.5	3,000	1,360	4.25	1.3	22	558.8	11.25	5.1
ZLH10524	Hot stick operated	1,500	680	9	2.7	17.5	444.5	3,000	1,360	4.25	1.3	22	558.8	11.5	5.22

4K STRAP HOIST



ZLH14335

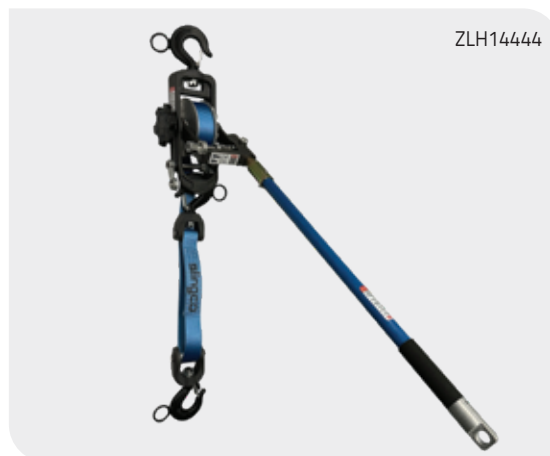

ZLH14444



VIEW PRODUCT MANUAL

The Slingco 4K strap features a Hi-Viz blue strap for easy identification. In single line mode capacity is 2K. When used in double line mode capacity is 4K. The 4k Strap Hoist has a pressure die cast drum for professional look and smooth finish to minimize the risk of strap fraying. The strap hoist has three operating positions: lift/pull, lower/release, and freewheeling. Strap hoists come in standard and hot stick operable versions.

Slingco Part No.	Type	Capacity		SINGLE LINE				Capacity		DOUBLE LINE				Tool weight	
		lb	kg	Lift		Headroom		lb	kg	Lift		Headroom		lb	kg
ZLH14335	Standard	2,000	907	11	3.4	16.5	419.1	4,000	1,814	5.5	1.7	22.5	571.5	16.32	7.40
ZLH14444	Hot stick operated	2,000	907	11	3.4	16.5	419.1	4,000	1,814	5.5	1.7	22.5	571.5	16.85	7.64

IMPORTANT TECHNICAL INFORMATION

CABLE PULLING GRIPS AND CABLE SUPPORT GRIPS

ASSESSMENT OF SUITABILITY

There are many factors that must be taken into account when assessing the suitability of a cable grip for a proposed application and trying to calculate a safe working load. These include:

- Size of cable grip in relation to size/shape of gripped object(s)
- Stability of object(s) when gripped
- Grip surface of object(s)
- Resistive force of object(s)
- Anticipated path of movement, including possible obstructions
- Approximate breaking strength of the cable grip
- Condition of cable grip
- Suitability and compatibility of any attachments used
- Environment / operating conditions
- Persons at risk

If you have any questions regarding suitability for any particular application please call the distributor who supplied the cable grip or our in-house Technical Department.

Please note: Slingco cable grips must be double steel banded securely before being pulled.


LATTICE DIMENSIONS

Lattice dimensions shown are as fitted to a nominal diameter of cable and prior 'free length' may be slightly longer than stated.

APPROXIMATE BREAK LOAD

This is the calculated average based on actual testing done by Slingco. Approximate break loads are quoted as a guide only.

TYPICAL CONFIGURATIONS



SAFE WORKING LOAD

Application load is normally calculated to be reduced by at least a factor of 5x the Approximate break load. Due to the wide variety of application parameters, the end user must apply a sensible safety factor to suit the safety requirements for the conditions of use.

The Safe Working Load (SWL) of a Slingco cable grip will depend on the Factor of Safety (FOS) applied to the Minimum Breaking Load.

FACTOR OF SAFETY (FOS)


Where the operational risk is considered to be normal, it is recommended that a FOS of 5 be applied, for a high risk operation a FOS of at least 10 should be considered. It is impossible to catalog or guarantee a safety factor that will apply for all applications.

Approximate Break Loads stated on any certification, the recommended Factors of Safety, and any implied or stated fitness for purpose, are all only applicable when the cable grip is as new and unused.

A 20% variance in break loads must be allowed for when selecting a cable grip; a suitable swivel must be used if there is 'twist' in the cable.

Pulling devices should only be attached via the pulling eye.

Torsional stress must be dealt with when using grips for line pulls and wire splices. When twisting forces are present use a swivel that rotates under load to release torsional stress.



Cable Grip Safety Information

- Ensure that the cable grip mesh fits conductor correctly.
- Ensure that the conductor fits up to the mid-point of the protective shoulder.
- Band the ends of the cable grip when attaching the conductor. We recommend between 1 1/4" and 2 1/4" from the end of the cable grips.
- Never modify or attempt to repair any grip.
- Ensure proper maintenance of the cable grip. If in doubt call 888-685-9478.
- Check the condition of the cable grip, and that it is the correct size for the intended application - do not exceed the rated capacity.
- Grips that are worn, bent or otherwise damaged should not be used.
- Grips are only to be used for temporary installations
- Pulling devices should only be attached via the pulling eye. It is NOT recommended that grips or swivels be run over tensioners while under load.
- Cable grips must only be fitted and used by trained competent person(s).



SLINGCO CABLE GRIPS MUST NOT BE USED TO THEIR APPROXIMATE BREAKING STRENGTH. A SENSIBLE SAFETY FACTOR MUST ALWAYS BE USED. IF IN DOUBT CONTACT THE MANUFACTURER OR THE DISTRIBUTOR THAT SUPPLIED THE GRIP!

If you have any questions regarding suitability for any particular application please call 888-685-9478




SINGLE AND DOUBLE EYE CABLE GRIP INSTRUCTIONS

PLEASE NOTE: The condition of the cable grip should always be checked prior to use. The correct size of grip should always be used for the intended application. The rated capacity of the grip should never be exceeded. Grips that are worn, bent or otherwise damaged should not be used.



Select the correct grip for the diameter of the conductor.

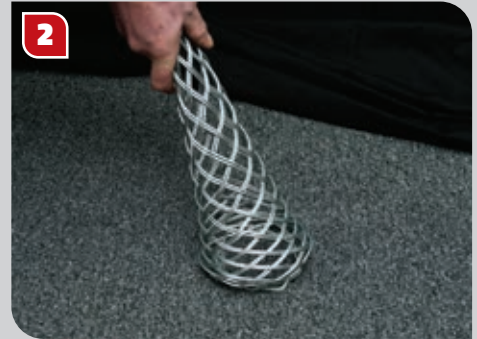


Prior to use, the lattice at the end of the grip needs to be widened. This can be easily achieved by pressing the end of the grip against a hard surface, which causes the lattice to expand.



The grip should then be placed over the end of the conductor...



...and pushed over the conductor.

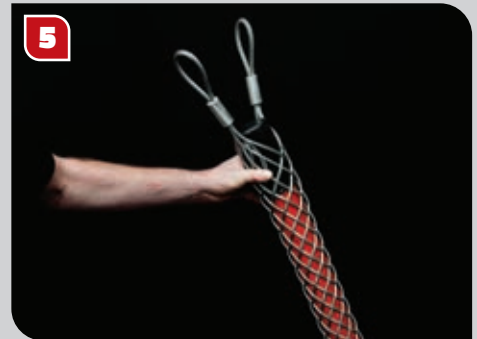


The grip then needs to be pushed along so that all the lattice is in contact with the conductor.



Once the cable grip is in place on the conductor, two clamps should be fitted to the end of the grip (as shown). We recommend between 1 ¼" (30mm) and 2 ¼" (55mm) away from the end of the cable grip.



Tape should then be wound around the end of the cable grip furthest away from the eye ends.

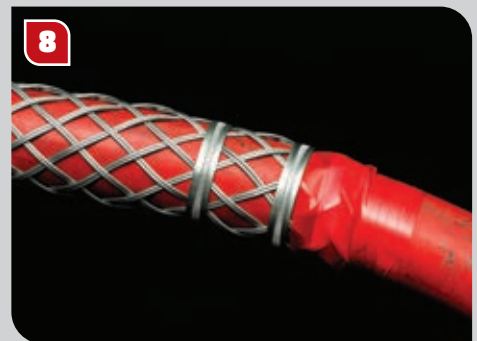

This will prevent the cable grip from snagging when in use.

 **888 685 9478**

 sales@slingcoamerica.com

 **slingco.com**



Slingco America, Inc., 3100 Jonquil Drive SE, Smyrna, GA 30080, USA · TOLL FREE: 888 685 9478 · Fax: 888 728 4047 · sales@slingcoamerica.com

Slingco makes no warranty, express or implied, with respect to these products nor with respect to their specifications. In no event shall Slingco be liable for any direct, indirect, punitive, incidental, special consequential damages to property or life, whatsoever, arising out of or connected with the use or misuse of these products. These products are intended for use by qualified professionals having adequate knowledge of their proper use. *October 2025 - v1.3*

The image shows three workers in orange safety suits and helmets working on a ship's deck. They are installing a large, braided metal cable. The worker in the foreground is wearing a blue helmet and is looking down at the cable. The other two workers are wearing white helmets and are further back, also working on the cable. The background shows the ship's structure, including railings and pipes. The Slingco logo is in the top left corner.

slingco®

SLINGCO MARINE PRODUCTS

CABLE INSTALLATION AND SUPPORT
MADE A WHOLE LOT EASIER



A GLOBAL BUSINESS BUILT ON QUALITY, INNOVATION, SERVICE ...AND REAL FAMILY TIES

We've been living and breathing manufacturing for as long as we can remember. You can blame our Dad for that!

He founded Slingco more than 40 years ago. Since then, we've grown up and so has the company, evolving into an expert design and manufacturing operation, producing high quality tools for cable and conductor installation – products that are renowned for high performance in quality-critical applications.

Slingco America is based in Atlanta, Georgia, but you'll find our products around the world, making heavy-duty cable installation and support a whole lot easier for people working in industries as varied as public utilities, overhead line construction, oil and gas, marine and offshore, civil engineering, aerospace, transport, the military, performing arts, vehicle building, construction, and more.

You can't make mistakes when you're dealing with products like ours. Too much depends on them. That's why we're obsessive about quality and innovation in design and manufacturing, and why nothing leaves our hands that isn't 100% dependable.

Because we understand exactly what your operation needs, we also know cost is a factor. We keep our prices realistic and hold a vast range of stock for fast – even same day – delivery.

We're brothers, partners, and the driving force behind Slingco, but we're only a small part of the whole picture. We've got a fantastic team of skilled people who share our obsession with quality and great service. We're proud of every one of them.

Together, we're going to carry on developing outstanding products. We're going to carry on getting them out to you in record time. And we're going to carry on being the sort of company it's a pleasure to deal with.

MATT DYKINS
PRESIDENT, SLINGCO AMERICA

NICK DYKINS
CEO, SLINGCO LIMITED



Cable installation, laying and support

Products for offshore windfarms

We offer extensive ranges of marine cable grips and hose restraint cable grips for applications including onshore and offshore cable installation, support of cables inside wind turbines and general cable management. We have also developed a range of cable pulling grips for use in the installation of inter-array and export cables from offshore wind farm installations.

- Single Eye, Double Eye, Lace Up Cable Grips
- Max Break Load 10Te – 90Te+
- Galvanised, Stainless and Aramid Grips
- Complete range to suit Cable OD range 10mm-295mm
- Test reports & certification
- Large project delivery
- Quick availability
- 40+ years' experience
- Award winning company

MARINE CABLE GRIPS FOR CLV

Our galvanised steel grips are heavy duty and suitable for array, export, fibre optic and umbilical cable installation. Available in single eye, double eye lace closed and double eye open lace up, sizes range from 90mm to over 300mm. Break Load tested in-house on our 70Te Linear tensile tester. Also available in stainless steel.

Manufactured to order or from stock, subject to availability.

Now available without ferrules in a continuous weave to reduce clearance required through the CPS (Cable Protection System)

Also available in **Aramid (Non-Metallic)**. Lighter, stronger and suitable for subsea storage during prolonged cable laydown with great saltwater corrosion resistance. Reverse weaved (fewer ferrules) for improved clearance through the CPS.

LACE-UP CABLE GRIPS

Our 'L-type' open grips are predominantly used for the temporary hang-off between the monopile and the nacelle turbine, where a 'typical' cable grip can't be fitted over a connector at the end of a cable. These grips are also used in pulling when the end of the cable is not accessible. The mesh is wrapped around the cable, then closed with the wire lace provided.

WIND TURBINE CABLE SUPPORT GRIPS

These grips incorporate special features for wind turbines. Open ended double eye lace type offers reduced cable contact for high vibration environments while still allowing excellent working loads and cable support.



CABLE GRIPS

Marine Cable Grips for CLV

Aramid (Non-metallic)	4
Galvanised (Low Load)	4
Stainless (Low Load)	4
Galvanised (Medium Load)	5
Galvanised (High Load)	5

Wind Turbine Cable Grips

LU Type Lace Up Open Cable Grip	6
Wind Turbine Support Grip - Heavy Duty Thimble Offset Eye	6

Fibre Optic Cable Grips

(FO) Fibre Optic Cable Grips	7
------------------------------	---

LINE PULLING SWIVELS

Line Pulling Swivels	8
----------------------	---

CABLE PULLING HEADS & LAYING ROLLERS

Cable Pulling Heads	9
'V' Type Lead In Cable Laying Rollers	9
Quad Roller (Heavy Duty)	9

WARNING

Cancer and Reproductive Harm www.P65Warnings.ca.gov

Some of the products in this catalog are subject to Prop65 health warnings. For details, please contact us.

PLEASE NOTE: While every effort has been made to ensure accuracy of all content in this catalog, please confirm with your Slingco contact any critical information before purchase.

MARINE CABLE GRIPS FOR CLV



ARAMID (NON-METALLIC)

Part Code	Material	Range (in)	Range (mm)	Eye Type	MBL (lb)	MBL (kg)	Lattice (in)	Lattice (mm)	Overall (in)	Overall (mm)	Thimble	Thimble Type	Ferrule	Ferrule Type
ZCS10158	Aramid	3 - 4	76 - 102	Single	48,005	21,772	63.0	1,600	73.2	1,860	No	N/A	No	N/A
ZCS14315	Aramid	3.9 - 5.5	100 - 140	Single	55,125	25,000	99.1	2,518	118.1	3,000	Yes	Nylon	No	N/A
ZCS10159	Aramid	4 - 5	102 - 127	Single	45,505	20,638	63.0	1,600	73.2	1,860	No	N/A	No	N/A
ZCS14221	Aramid	5.7 - 7.5	145 - 190	Single	66,150	30,000	94.5	2,400	112.2	2,850	No	N/A	No	N/A
ZCS13459	Aramid	5.9 - 7.1	150 - 180	Single	66,150	30,000	78.7	2,000	110.2	2,800	No	N/A	No	N/A
ZCS14221	Aramid	5.7 - 7.5	145 - 190	Single	66,150	30,000	94.5	2,400	112.2	2,850	No	N/A	No	N/A
ZCS12482	Aramid	9.1 - 11	230 - 280	Single	66,150	30,000	104.3	2,650	104.3	2,650	No	N/A	No	N/A
ZCS14301-3M	Aramid	9.8 - 11.8	250 - 300	Double	156,555	71,000	119.1	3,026	149.6	3,800	No	N/A	No	N/A
ZCS13464	Aramid	5.9 - 7.9	150 - 200	Double	88,200	40,000	78.7	2,000	106.3	2,700	No	N/A	No	N/A
ZCS14314	Aramid	3.9 - 5.5	100 - 140	DE - Lace-up	55,125	25,000	99.1	2,518	126.0	3,200	Yes	Nylon	No	N/A
ZCS14477	Aramid	7.7 - 8.7	195 - 220	DE - Lace-up	11,240	5,098	76.7	1,948	98.4	2,500	Yes	Nylon	No	N/A

GALVANISED LOW LOAD

Part Code	Material	Range (in)	Range (mm)	Eye Type	MBL (lb)	MBL (kg)	Lattice (in)	Lattice (mm)	Overall (in)	Overall (mm)	Thimble	Thimble Type	Ferrule	Ferrule Type
ZCS14748	Galvanised	2.8 - 3.1	70 - 80	Single	55,125	25,000	97.6	2,480	118.1	3,000	Yes	Steel	Yes	Steel
ZCS12138	Galvanised	3.3 - 4.1	83 - 105	Single	55,125	25,000	99.2	2,519	109.9	2,792	Yes	Steel	Yes	Steel
ZCS12139	Galvanised	3.7 - 4.5	93 - 114	Single	55,125	25,000	98.9	2,511	109.6	2,784	Yes	Steel	Yes	Steel
ZCS3574	Galvanised	5.3 - 6.3	135 - 160	Single	44,100	20,000	41.5	1,053	54.8	1,393	No	N/A	Yes	Alu
ZCS10527	Galvanised	5.3 - 6.3	135 - 160	Single	56,890	25,800	59.0	1,499	74.9	1,903	Yes	Steel	Yes	Alu
ZCS12697	Galvanised	6.3 - 8.3	160 - 210	Single	66,150	30,000	90.6	2,300	108.3	2,750	Yes	Steel	Yes	Alu
ZCS3575	Galvanised	6.3 - 7.5	160 - 190	Single	44,100	20,000	57.2	1,454	78.7	1,998	No	N/A	Yes	Alu
ZCS3576	Galvanised	7.5 - 8.7	190 - 220	Single	44,100	20,000	61.9	1,572	81.6	2,072	No	N/A	Yes	Alu
ZCS3577	Galvanised	8.7 - 9.8	220 - 250	Single	44,100	20,000	58.1	1,475	71.0	1,804	No	N/A	Yes	Alu
ZCS12661	Galvanised	9.4 - 11	240 - 280	Single	66,150	30,000	98.4	2,500	118.1	3,000	Yes	Steel	Yes	Alu
ZCS3578	Galvanised	9.8 - 11.8	250 - 300	Single	44,100	20,000	80.0	2,031	93.3	2,369	No	N/A	Yes	Alu
ZCS13888	Galvanised	3.7 - 4.5	93 - 114	Double	66,150	30,000	98.9	2,511	116.7	2,964	No	N/A	Yes	Steel
ZCS3579	Galvanised	5.3 - 6.3	135 - 160	Double	44,810	20,321	42.0	1,067	63.0	1,600	No	N/A	Yes	Alu
ZCS3580	Galvanised	6.3 - 7.5	160 - 190	Double	59,535	27,000	59.0	1,498	82.6	2,098	No	N/A	Yes	Alu
ZCS3581	Galvanised	7.5 - 8.7	190 - 220	Double	59,535	27,000	61.9	1,572	85.5	2,172	No	N/A	Yes	Alu
ZCS3582	Galvanised	8.7 - 9.8	220 - 250	Double	59,535	27,000	52.2	1,327	75.9	1,927	No	N/A	Yes	Alu
ZCS3583	Galvanised	9.8 - 11.8	250 - 300	Double	47,410	21,500	80.0	2,031	107.5	2,731	No	N/A	Yes	Alu
ZCS14749	Galvanised	2.8 - 3.1	70 - 80	DE - Lace Up	55,125	25,000	97.6	2,480	126.0	3,200	Yes	Steel	Yes	Steel
ZCS12140	Galvanised	3.7 - 4.5	93 - 114	DE - Lace Up	55,125	25,000	98.9	2,511	116.7	2,964	Yes	Steel	Yes	Steel
ZCS12141	Galvanised	3.3 - 4.1	83 - 105	DE - Lace Up	66,150	30,000	98.2	2,494	117.0	2,972	Yes	Steel	Yes	Steel
ZCS7496	Galvanised	3.9 - 4.9	100 - 125	DE - Lace Up	57,595	26,120	78.9	2,005	100.6	2,555	Yes	Steel	Yes	Steel
ZCS3584	Galvanised	5.3 - 6.3	135 - 160	DE - Lace Up	38,085	17,273	47.6	1,208	71.2	1,808	No	N/A	Yes	Alu
ZCS3585	Galvanised	6.3 - 7.5	160 - 190	DE - Lace Up	38,085	17,273	59.0	1,498	82.6	2,098	No	N/A	Yes	Alu
ZCS3586	Galvanised	7.5 - 8.7	190 - 220	DE - Lace Up	38,085	17,272	61.9	1,572	85.5	2,172	No	N/A	Yes	Alu
ZCS3587	Galvanised	8.7 - 9.8	220 - 250	DE - Lace Up	38,085	17,272	59.7	1,517	83.3	2,117	No	N/A	Yes	Alu
ZCS12979	Galvanised	8.7 - 9.8	220 - 250	DE - Lace Up	50,715	23,000	52.2	1,327	75.9	1,927	No	N/A	Yes	Alu
ZCS12725	Galvanised	9.4 - 11	240 - 280	DE - Lace Up	66,150	30,000	98.4	2,500	122.0	3,100	Yes	Steel	Yes	Alu

STAINLESS LOW LOAD

Part Code	Material	Range (in)	Range (mm)	Eye Type	MBL (lb)	MBL (kg)	Lattice (in)	Lattice (mm)	Overall (in)	Overall (mm)	Thimble	Thimble Type	Ferrule	Ferrule Type
ZCS3254	Stainless Steel	3 - 3.5	76 - 89	Double	39,205	17,781	54.7	1,390	79.5	2,020	No	N/A	Yes	Copper
ZCS11397	Stainless Steel	3.4 - 4.2	87 - 107	Single	33,075	15,000	87.0	2,210	96.5	2,450	Yes	Steel	Yes	Steel
ZCS11395	Stainless Steel	4.3 - 5.2	109 - 133	Single	33,075	15,000	77.6	1,971	84.6	2,148	Yes	Steel	Yes	Steel
ZCS09391	Stainless Steel	4.9 - 5.9	125 - 150	Single	55,300	25,080	98.4	2,500	111.0	2,820	Yes	Steel	Yes	Steel
ZCS14792	Stainless Steel	5.3 - 6.3	135 - 160	Double	40,795	18,500	59.8	1,519	84.6	2,150	No	n/a	Yes	Steel
ZCS14793	Stainless Steel	6.3 - 7.5	160 - 190	Double	48,510	22,000	59.0	1,498	82.6	2,098	No	n/a	Yes	Steel

MARINE CABLE GRIPS FOR CLV (continued)

GALVANISED MEDIUM LOAD

Part Code	Material	Range (in)	Range (mm)	Eye Type	MBL (lb)	MBL (kg)	Lattice (in)	Lattice (mm)	Overall (in)	Overall (mm)	Thimble	Thimble Type	Ferrule	Ferrule Type
ZCS3525	Galvanised	3.9 - 4.9	100 - 125	Single	100,040	45,370	78.9	2,005	98.4	2,500	No	N/A	Yes	Alu
ZCS3525-THI	Galvanised	3.9 - 4.9	100 - 125	Single	100,330	45,500	98.4	2,500	114.4	2,905	Yes	Steel	Yes	Alu
ZCS3525-2.5M	Galvanised	3.9 - 4.9	100 - 125	Single	100,330	45,500	98.4	2,500	114.4	2,905	No	N/A	Yes	Alu
ZCS3525-3M	Galvanised	3.9 - 4.9	100 - 125	Single	100,330	45,500	118.1	3,000	134.1	3,405	No	N/A	Yes	Alu
ZCS3526	Galvanised	4.9 - 5.9	125 - 150	Single	105,050	47,640	71.7	1,821	89.7	2,279	No	N/A	Yes	Alu
ZCS3526THI	Galvanised	4.9 - 5.9	125 - 150	Single	105,050	47,640	71.7	1,821	89.7	2,279	Yes	Steel	Yes	Alu
ZCS3526-3M	Galvanised	4.9 - 5.9	125 - 150	Single	105,050	47,640	118.1	3,000	137.8	3,500	No	N/A	Yes	Alu
ZCS11934	Galvanised	5.1 - 6.9	130 - 176	Single	110,250	50,000	102.5	2,604	81.9	2,080	No	N/A	Yes	Alu
ZCS11934-4M	Galvanised	5.1 - 6.9	130 - 176	Single	110,250	50,000	157.1	3,990	175.8	4,466	No	N/A	Yes	Alu
ZCS11776	Galvanised	5.5 - 6.9	140 - 176	Single	112,455	51,000	78.7	2,000	91.5	2,325	No	N/A	Yes	Alu
ZCS3527	Galvanised	5.9 - 7.9	150 - 200	Single	112,045	50,815	70.9	1,800	91.1	2,315	No	N/A	Yes	Alu
ZCS3215	Galvanised	7.9 - 8.7	200 - 220	Single	88,200	40,000	78.7	2,000	103.5	2,630	No	N/A	Yes	Alu
ZCS12740-THI-2M	Galvanised	3.5 - 4.9	90 - 125	Single	110,250	50,000	78.7	1,998	98.4	2,500	Yes	Steel	Yes	Alu
ZCS12740-THI-ST-2M	Galvanised	3.5 - 4.9	90 - 125	Single	110,250	50,000	78.7	1,998	98.4	2,500	Yes	Steel	Yes	Steel
ZCS13507-THI-3M	Galvanised	5.5 - 7.1	140 - 180	Double	88,200	40,000	118.1	3,000	145.7	3,700	Yes	Steel	Yes	Alu
ZCS3545	Galvanised	3.9 - 4.9	100 - 125	DE - Lace Up	105,840	48,000	78.9	2,005	100.6	2,555	No	N/A	Yes	Alu
ZCS3545-THI	Galvanised	3.9 - 4.9	100 - 125	DE - Lace Up	105,840	48,000	78.9	2,005	99.3	2,522	Yes	Steel	Yes	Alu
ZCS14953	Galvanised	3.9 - 5.5	100 - 140	DE - Lace Up	99,230	45,000	98.4	2,500	126.0	3,200	No	N/A	No	N/A
ZCS3546	Galvanised	4.9 - 5.9	125 - 150	DE - Lace Up	105,840	48,000	71.7	1,821	93.3	2,371	No	N/A	Yes	Alu
ZCS3546THI	Galvanised	4.9 - 5.9	125 - 150	DE - Lace Up	105,840	48,000	71.7	1,821	93.3	2,371	Yes	Steel	Yes	Alu
ZCS12691-THI	Galvanised	5.9 - 7.5	150 - 190	DE - Lace Up	99,230	45,000	78.7	2,000	118.1	3,000	Yes	Steel	Yes	Alu
ZCS12689	Galvanised	5.9 - 7.5	150 - 190	DE - Lace Up	99,230	45,000	98.4	2,500	126.0	3,200	No	N/A	Yes	Alu
ZCS3547	Galvanised	5.9 - 7.9	150 - 200	DE - Lace Up	105,840	48,000	66.1	1,678	87.7	2,228	No	N/A	Yes	Alu
ZCS3547-THI	Galvanised	5.9 - 7.9	150 - 200	DE - Lace Up	66,150	30,000	66.1	1,678	87.7	2,228	Yes	Steel	Yes	Alu
ZCS11948-THI	Galvanised	8.7 - 10.2	220 - 260	DE - Lace Up	99,230	45,000	79.4	2,018	101.1	2,568	Yes	Steel	Yes	Steel

GALVANISED HIGH LOAD

Part Code	Material	Range (in)	Range (mm)	Eye Type	MBL (lb)	MBL (kg)	Lattice (in)	Lattice (mm)	Overall (in)	Overall (mm)	Thimble	Thimble Type	Ferrule	Ferrule Type
ZCS12741-THI-2.5M	Galvanised	4.3-6.5	110-165	Single	121275	55000	93.2	2367	113.3	2879	Yes	Steel	Yes	Alu
ZCS12742-THI-3M	Galvanised	5.1-7	130-178	Single	143330	65000	116.9	2969	137.8	3500	Yes	Steel	Yes	Alu
ZCS12742-THI-ST-3M	Galvanised	5.1-7	130-178	Single	143330	65000	116.9	2969	137.8	3500	Yes	Steel	Yes	Steel
ZCS12743-THI-3M	Galvanised	6.1-8.3	155-210	Single	154350	70000	118.9	3021	137.8	3500	Yes	Steel	Yes	Alu
ZCS12743-THI-3M	Galvanised	6.1-8.3	155-210	Single	154350	70000	118.9	3021	137.8	3500	Yes	Steel	Yes	Alu
ZCS12744-THI-3M	Galvanised	7.7-9.8	195-250	Single	187425	85000	119.4	3032	137.8	3500	Yes	Steel	Yes	Alu
ZCS12744-THI-3M	Galvanised	7.7-9.8	195-250	Single	187430	85000	119.4	3032	137.8	3500	Yes	Steel	Yes	Alu
ZCS3528	Galvanised	7.9-10.0	200-255	Single	138035	62600	80.6	2047	99.3	2523	No	N/A	Yes	Alu
ZCS09216	Galvanised	7.9-10.0	200-255	Single	138035	62600	118.1	3000	137.8	3500	No	N/A	Yes	N/A
ZCS3528THI	Galvanised	7.9-10	200-255	Single	138030	62600	78.7	2000	102.4	2600	Yes	Alu	Yes	Alu
ZCS12745-THI-3M	Galvanised	9.3-11.8	235-300	Single	198450	90000	114.2	2900	137.8	3500	Yes	Steel	Yes	Alu
ZCS3529	Galvanised	10.0 - 12.0	255-305	Single	138035	62,600	76.6	1945	95.3	2421	No	N/A	Yes	Alu
ZCS3530	Galvanised	12.0 - 14.0	305-355	Single	138035	62600	96.9	2460	115.6	2936	No	N/A	Yes	Alu
ZCS3535	Galvanised	3.9-4.9	100 - 125	Double	114660	52000	78.9	2005	100.6	2555	No	N/A	Yes	Alu
ZCS15494	Galvanised	3.9-5.5	100-140	Double	99230	45000	78.7	2000	106.3	2700	No	N/A	No	N/A
ZCS12755-THI-2.5M	Galvanised	4.3 - 6.5	110-165	Double	132300	60000	98.0	2488	126.0	3200	Yes	Steel	Yes	Alu
ZCS3536	Galvanised	4.9-5.9	125 - 150	Double	123040	55,800	71.7	1821	93.3	2371	No	N/A	Yes	Alu
ZCS12756-THI-3M	Galvanised	5.1-7	130-178	Double	165380	75000	116.9	2969	149.6	3800	Yes	Steel	Yes	Alu
ZCS3537	Galvanised	5.9-7.9	150-200	Double	127560	57850	70.9	1800	103.0	2615	No	N/A	Yes	Alu
ZCS12757-THI-3M	Galvanised	6.1-9.1	155-230	Double	176400	80000	113.3	2877	143.9	3656	Yes	Steel	Yes	Alu
ZCS12758-THI-3M	Galvanised	7.7-9.8	195-250	Double	198450	90000	119.4	3032	153.5	3900	Yes	Steel	Yes	Alu
ZCS3538	Galvanised	7.9-10	200-255	Double	156555	71000	80.6	2047	102.2	2597	No	N/A	Yes	Alu
ZCS3538THI	Galvanised	7.9-10	200-255	Double	156560	71000	78.7	2000	102.4	2600	Yes	Steel	Yes	Alu
ZCS09330	Galvanised	7.9-10.2	200-260	Double	156560	71000	118.1	3000	139.8	3550	Yes	Steel	Yes	Steel
ZCS12759-THI-3M	Galvanised	9.3-11.8	235-300	Double	209480	95000	118.1	3000	153.5	3900	Yes	Steel	Yes	Alu
ZCS09331	Galvanised	10-12	254-305	Double	156560	71000	118.1	3000	139.8	3550	Yes	Steel	Yes	Alu
ZCS3539	Galvanised	10.0 - 12.0	255-305	Double	156555	71000	76.6	1945	98.2	2495	No	N/A	Yes	Alu
ZCS3540	Galvanised	12.0-14.0	305-355	Double	156555	71000	96.9	2460	124.4	3159	No	N/A	Yes	Alu
ZCS12754-THI-2M	Galvanised	3.5-4.9	90-125	Double	121275	55000	78.7	2000	106.3	2700	Yes	Steel	Yes	Alu
ZCS14953	Galvanised	3.9-5.5	100-140	DE - Lace Up	99230	45000	98.4	2500	126.0	3200	No	N/A	No	N/A
ZCS12761-THI-2.5M	Galvanised	4.3-6.5	110-165	DE - Lace Up	110250	50000	98.4	2500	126.0	3200	Yes	Steel	Yes	Alu
ZCS12762-THI-3M	Galvanised	5.1-7	130-178	DE - Lace Up	132300	60000	118.1	3000	145.7	3700	Yes	Steel	Yes	Alu
ZCS16101-2M	Galvanised	5.9-7.5	150-190	DE - Lace Up	77180	35000	78.7	2000	102.4	2600	No	N/A	No	N/A
ZCS16101-3M	Galvanised	5.9-7.5	150-190	DE - Lace Up	88200	40000	118.1	3000	141.7	3600	No	N/A	No	N/A
ZCS3548	Galvanised	7.9-10.0	200 - 255	DE - Lace Up	132300	60000	80.6	2047	102.2	2597	No	N/A	Yes	Alu
ZCS3548-THI-2M	Galvanised	8.7-10	220-255	DE - Lace Up	132300	60000	80.6	2047	102.2	2597	Yes	Steel	Yes	Alu
ZCS16103	Galvanised	9.6-11.8	245-300	DE - Lace Up	132300	60000	114.2	2900	141.7	3600	No	N/A	No	N/A

WIND TURBINE CABLE GRIPS


LU TYPE LACE UP OPEN CABLE GRIP

Ideal for light to medium loads; the LU Type is fitted to the cable being pulled by stitching it together, like a football. Mainly used where a 'typical' cable grip can't be fitted over a connector at the end of a cable and can be used to temporary hang off the cables. For use in pulling when the end is not accessible. The LU Type is wrapped around the cable, then closed with the wire lace provided.



Slingco Part No	Range		Lattice Weave	Lattice Length		Overall Length		Approx. Break Load	
	in	mm		in	mm	in	mm	lb	kg
LACE UP STANDARD GRIP - GALVANISED									
ZCS1157	0.25 - 0.50	6 - 13	Single	8	210	15	380	1,680	760
ZCS0872	0.50 - 0.75	13 - 19	Single	17	429	22	552	2,240	1,015
ZCS0871	0.75 - 1.00	19 - 25	Double	15	369	23	590	5,600	2,540
ZCS0328	1.00 - 1.50	25 - 38	Single	15	375	21	545	7,849	3,555
ZCS0329	1.50 - 2.00	38 - 50	Double	27	679	36	909	11,200	5,080
ZCS0330	2.00 - 2.50	50 - 63	Double	24	610	34	865	11,200	5,080
ZCS0331	2.50 - 3.50	63 - 89	Double	22	685	31	793	13,440	6,095
ZCS0853	3.50 - 4.50	89 - 115	Double	28	708	40	1,006	15,680	7,110
ZCS1109	4.50 - 5.50	115 - 140	Double	28	700	39	990	15,680	7,110
ZCS4463	4.72 - 5.90	120 - 150	Triple	62	1582	86	2,182	32,400	14,700
ZCS3584	5.31 - 6.30	135 - 160	Double	48	1208	71	1,808	38,080	17,000
ZCS3585	6.33 - 7.48	161 - 190	Double	59	1500	83	2,100	38,080	17,000
ZCS3586	7.51 - 8.66	191 - 220	Double	62	1572	86	2,172	38,080	17,000
ZCS3587	8.70 - 9.84	221 - 250	Double	59	1500	83	2,100	38,080	17,000
ZCS3588	9.88 - 11.81	251 - 300	Double	80	2031	108	2,731	38,080	17,000
LACE UP STANDARD GRIP - 316 STAINLESS STEEL									
ZCS1983	0.25 - 0.50	6 - 13	Single	9	230	12	305	1,344	610
ZCS1796	0.50 - 0.75	13 - 19	Single	17	429	24	605	1,792	810
ZCS1789	0.75 - 1.00	19 - 25	Single	14	359	21	539	4,480	2,030
ZCS1797	1.00 - 1.50	25 - 38	Single	15	375	22	552	6,272	2,845
ZCS1984	1.50 - 2.00	38 - 50	Double	27	679	35	882	8,960	4,065
ZCS2466	2.00 - 2.50	50 - 63	Double	24	610	34	865	8,960	4,065
ZCS0816	2.50 - 3.50	63 - 89	Double	22	548	31	788	10,752	4,875
ZCS5094	2.75 - 3.44	69 - 87	Multiple	54	1362	80	2041	40,000	18,140
ZCS1356	3.50 - 4.50	89 - 115	Double	21	540	33	845	12,544	5,690
ZCS2832	3.50 - 4.50	89 - 115	Triple	23	574	35	879	14,012	6,300
ZCS1355	4.50 - 5.50	115 - 140	Double	27	685	39	990	12,544	5,690
ZCS2833	4.50 - 5.50	115 - 140	Triple	29	730	41	1,035	16,128	7,315

WIND TURBINE SUPPORT GRIP - HEAVY DUTY THIMBLE OFFSET EYE

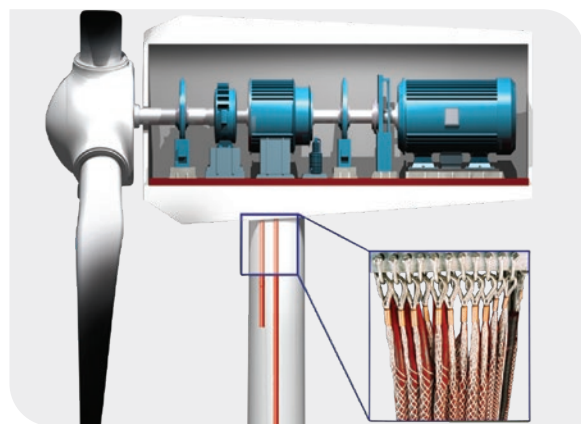

Slingco has developed a range of cable grips tailored for the renewable energy sector for use in:

- Cable installation – onshore and offshore
- Cable support inside wind turbines
- Cable management

For wind turbines, special features have been adapted to allow for minimal contact with the actual cable while still allowing excellent working loads and cable support.

The Slingco Wind Turbine Support Grip is manufactured from 316 Stainless Steel and provides cable support and control inside the wind turbine. It features rounded copper ferrules and offers reduced cable contact for high vibration environments. Custom grips can be adapted to meet any requirement.





Slingco Part No	Range		Lattice Length		Approx. Break Load	
	in	mm	in	mm	lb	kg
ZCS2844	0.31 - 0.40	8 - 10	19	480	1,455	660
ZCS2845	0.40 - 0.60	10 - 15	17	432	2,284	1,036
ZCS2846	0.60 - 0.80	15 - 20	17	432	2,901	1,316
ZCS2847	0.80 - 0.99	20 - 25	18	461	4,586	2,080
ZCS2848	1.0 - 1.19	25 - 30	16	413	5,467	2,480
ZCS2849	1.20 - 1.58	30 - 40	19	470	7,716	3,500
ZCS2850	1.58 - 1.98	40 - 50	32	825	10,781	4,890
ZCS2851	1.98 - 2.37	50 - 60	30	751	10,791	4,895
ZCS2852	2.38 - 2.77	60 - 70	31	788	14,163	6,424
ZCS2853	2.77 - 3.55	70 - 90	45	1,135	14,163	6,424
ZCS2854	3.55 - 4.33	90 - 110	31	799	18,367	8,331

FIBRE OPTIC CABLE GRIPS

This grip's triple weave construction is ideal for heavy loads. FO (Fibre Optic) cable grips are colour coded for ease of identification. Used for the installation of fibre optic cables in a subsea environment for temporary pull-in. Use with bare or insulated cable, conductor or wire. Made of Galvanised Steel.



Slingco Part No	Color Code	Range		Lattice Length		Approx. Break Load	
		in	mm	in	mm	lb	kg
ZCS1710	Dark Green	0.25 - 0.50	6 - 13	28	720	7,000	3,170
ZCS1711	Brown	0.50 - 0.75	13 - 19	39	978	10,500	4,760
ZCS1712	Light Blue	0.75 - 1.00	19 - 25	43	1,092	14,100	6,395
ZCS1713	Gold	1.00 - 1.25	25 - 32	58	1,470	25,000	11,340
ZCS1714	Black	1.25 - 1.50	32 - 38	51	1,291	31,000	14,065
ZCS1715	Red	1.50 - 1.75	38 - 44	68	1,739	31,000	14,065
ZCS1716	Dark Blue	1.75 - 2.25	44 - 57	69	1,747	49,000	22,230
ZCS1750	Yellow	2.00 - 2.50	51 - 63	54	1,370	49,000	22,230
ZCS1751	Orange	2.50 - 3.00	63 - 76	52	1,311	49,000	22,230
ZCS1752	Aluminum	3.00 - 3.50	76 - 89	53	1,342	49,000	22,230
ZCS1753	Light Green	3.50 - 4.00	89 - 102	53	1,351	49,000	22,230

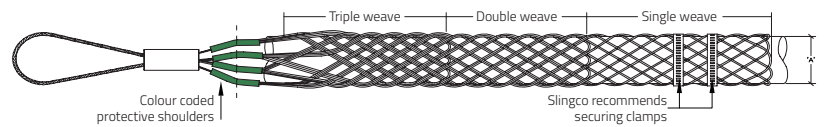

NON-METALLIC
Corrosion resistant.

LIGHTER
Easy to install, save time.

NO FERRULES
Better clearance through the CPS (Cable Protection System).


■ Break loads and lengths shown in this brochure are as a guide only – for exact calculations please refer to data sheets which can be obtained from sales@slingco.com
■ For socks/stockings above 140mm diameter please contact – sales@slingco.com

LINE PULLING SWIVELS



Swivels are important in pulling when lines develop torsion during installation. They help release torque and prevent it from reaching dangerous levels, which can cause damage to the cable.

All Slingco Swivels are designed to the highest specifications and are stringently quality tested and inspected to ensure optimum performance and reliability.

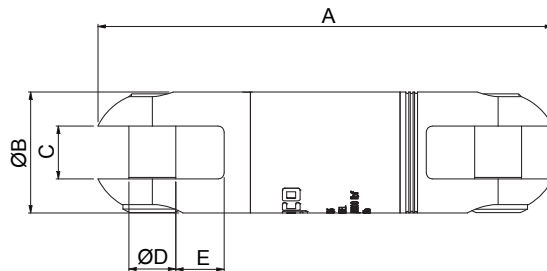

Slingco part no.	Material with zinc plating	Safe working load		A length		Ø B		C		Ø D Pin		E Recess		Weight	
		(lb)	(kN)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)
ZSW2097	EN8	15,000	66.7	7.34	186.4	2.09	53	0.79	20	0.71	18	0.83	21	4.59	2.1
ZSW2857	EN24	30,000	133.4	11.13	282.6	2.50	63.5	1.00	25.4	0.875	22.2	1.13	28.6	10.44	4.7

SAFETY NOTE: All Slingco Line Pulling Swivels are designed for straight line pulling and will not support side loads as would be encountered traveling over a bull wheel. Swivel selection should be based on pulling line diameter, grip size, opening dimensions, pin sizes, working load, and sheave groove diameter. Swivels are not designed for general lifting.

Performance.
Under the toughest conditions.

- Marine Cable Grips
- Wind Turbine Cable Grips
- Fibre Optic Cable Grips
- Cable Laying Rollers
- Line Pulling Swivels
- Cable Pulling Heads

slingco

CABLE PULLING HEAD



Slingco's Pulling Head is designed to be used for subsea cable pull-ins, allowing a messenger line to be attached to the pulling head to guide the cable along the sea floor and up through a J tube for installation to a wind turbine.

Slingco Part No	Cable diameter		Weight	
	in	mm	lb	kg
ZPH15107	3.54	90	117	53
ZPH15108	3.66	93	116	52.4
ZPH15109	3.82	97	114	51.7
ZPH15110	4.06	103	111	50.5
ZPH15111	4.09	104	143	64.9
ZPH15112	4.25	108	141	64
ZPH15113	4.57	116	137	62.1

Note: Part Nos. ZPH15107-ZPH15110 and ZPH15111-ZPH15113 share a common outside geometry, respectively, and are machined internally to fit the required cable diameter.

Other sizes to suit array cables up to 197mm are also available on request.

All Pulling Heads have WLL 15te, MBL 45Te. Sf 3:1 (Safety Factor).

- Ensures no damage or strain during pulling process
- Maintains tension and alignment during seabed cable-laying
- Extremely heavy duty and suitable for large underwater applications

'V' TYPE LEAD IN CABLE LAYING ROLLERS




ZGP12229



ZGP12230

The Slingco 'V' Style Cable Roller leads the cable from the drum into the trench, the design is such that cable is centralized prior to it being fed into the trench. This cable roller can also be used as a Pipe Roller.

Slingco Part No	Length		Width		Height		Special features
	in	mm	in	mm	in	mm	
ZGP12231	41.33	105	23.62	60	17.32	44	Fixed Shaft for heavy applications
ZGP12230	33.46	85	23.62	60	17.32	44	Spring Loaded Shafts for easy replacement
ZGP12229	19.69	50	15.75	40	9.84	25	Spring Loaded Shafts for easy replacement

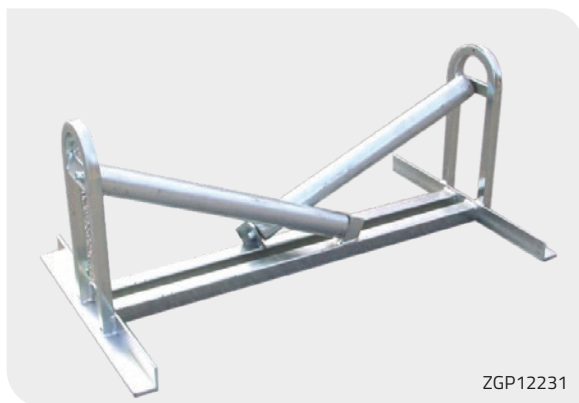

ZGP12231

QUAD ROLLER (HEAVY DUTY)



The QR1 quadrant roller can be bolted to floors, beams, trays, racks, or fitted to a free-standing frame. Fitted with a hinged gate, cable can easily be extracted.

The cable roller is suitable for cables up to 6.3in (160mm) diameter with a weight capacity of 881.84lb (400kg)

Slingco Part No	Length		Width		Height		Special features
	in	mm	in	mm	in	mm	
ZGP16204	11.81	300	7.09	180	14.96	380	Supplied with removable fixing angle

IMPORTANT TECHNICAL INFORMATION

CABLE PULLING GRIPS AND CABLE SUPPORT GRIPS

ASSESSMENT OF SUITABILITY

There are many factors that must be taken into account when assessing the suitability of a cable grip for a proposed application and trying to calculate a safe working load.

These include:

- Size of cable grip in relation to size/shape of gripped object(s)
- Stability of object(s) when gripped
- Grip surface of object(s)
- Resistive force of object(s)
- Anticipated path of movement, including possible obstructions
- Approximate breaking strength of the cable grip
- Condition of cable grip
- Suitability and compatibility of any attachments used
- Environment / operating conditions
- Persons at risk

If you have any questions regarding suitability for any particular application please call the distributor who supplied the cable grip or our in-house Technical Department.

Please note: Slingco cable grips must be double steel banded securely before being pulled.


LATTICE DIMENSIONS

Lattice dimensions shown are as fitted to a nominal diameter of cable and prior 'free length' may be slightly longer than stated.

APPROXIMATE BREAK LOAD

This is the calculated average based on actual testing done by Slingco. Approximate break loads are quoted as a guide only.

TYPICAL CONFIGURATIONS



SAFE WORKING LOAD

Application load is normally calculated to be reduced by at least a factor of 5x the Approximate break load. Due to the wide variety of application parameters, the end user must apply a sensible safety factor to suit the safety requirements for the conditions of use.

The Safe Working Load (SWL) of a Slingco cable grip will depend on the Factor of Safety (FOS) applied to the Minimum Breaking Load.


FACTOR OF SAFETY (FOS)

Where the operational risk is considered to be normal, it is recommended that a FOS of 5 be applied, for a high risk operation a FOS of at least 10 should be considered. It is impossible to catalogue or guarantee a safety factor that will apply for all applications.

Approximate Break Loads stated on any certification, the recommended Factors of Safety, and any implied or stated fitness for purpose, are all only applicable when the cable grip is as new and unused.

A 20% variance in break loads must be allowed for when selecting a cable grip; a suitable swivel must be used if there is 'twist' in the cable.

Torsional stress must be dealt with when using grips for line pulls and wire splices. When twisting forces are present use a swivel that rotates under load to release torsional stress.



Cable Grip Safety Information

- Ensure that the cable grip mesh fits conductor correctly
- Ensure that the conductor fits up to the mid-point of the protective shoulder
- Clamp the ends of the cable grip when attaching the conductor. We recommend between 1¼" and 2¼" from the end of the cable grips
SECURE CLAMPING MUST BE USED ON SLINGCO CABLE GRIPS
- Never modify or attempt to repair any grip
- Ensure proper maintenance of the cable grip. If in doubt call 01706 855558
- Check the condition of the cable grip, and that it is the correct size for the intended application - do not exceed the rated capacity
- Grips that are worn, bent or otherwise damaged should not be used
- Grips are only to be used for temporary installations
- Pulling devices should only be attached via the pulling eye
- Cable grips must only be fitted and used by trained competent person(s)



SLINGCO CABLE GRIPS MUST NOT BE USED TO THEIR APPROXIMATE BREAKING STRENGTH. A SENSIBLE SAFETY FACTOR MUST ALWAYS BE USED. IF IN DOUBT CONTACT THE MANUFACTURER OR THE DISTRIBUTOR THAT SUPPLIED THE GRIP!

If you have any questions regarding suitability for any particular application please call 01706 855558



SINGLE AND DOUBLE EYE CABLE GRIP INSTRUCTIONS

PLEASE NOTE: The condition of the cable grip should always be checked prior to use. The correct size of grip should always be used for the intended application. The rated capacity of the grip should never be exceeded. Grips that are worn, bent or otherwise damaged should not be used.



Select the correct grip for the diameter of the conductor.



Prior to use, the lattice at the end of the grip needs to be widened. This can be easily achieved by pressing the end of the grip against a hard surface, which causes the lattice to expand.



The grip should then be placed over the end of the conductor...



...and pushed over the conductor.



The grip then needs to be pushed along so that all the lattice is in contact with the conductor.



Once the cable grip is in place on the conductor, two clamps should be fitted to the end of the grip (as shown). We recommend between 1 ¼" (30mm) and 2 ¼" (55mm) away from the end of the cable grip.



Tape should then be wound around the end of the cable grip furthest away from the eye ends.



This will prevent the cable grip from snagging when in use.

 **+44 [0]1706 855558**

 **sales@slingco.com**

 **slingco.com**



Slingco Limited, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG, England · Tel: +44 [0]1706 855558 · sales@slingco.com

This document is for marketing purposes only. The information contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited. *January 2026 - v0.7*