




Engineering Protection Since 1982

In partnership with
XTIRPA

Welcome

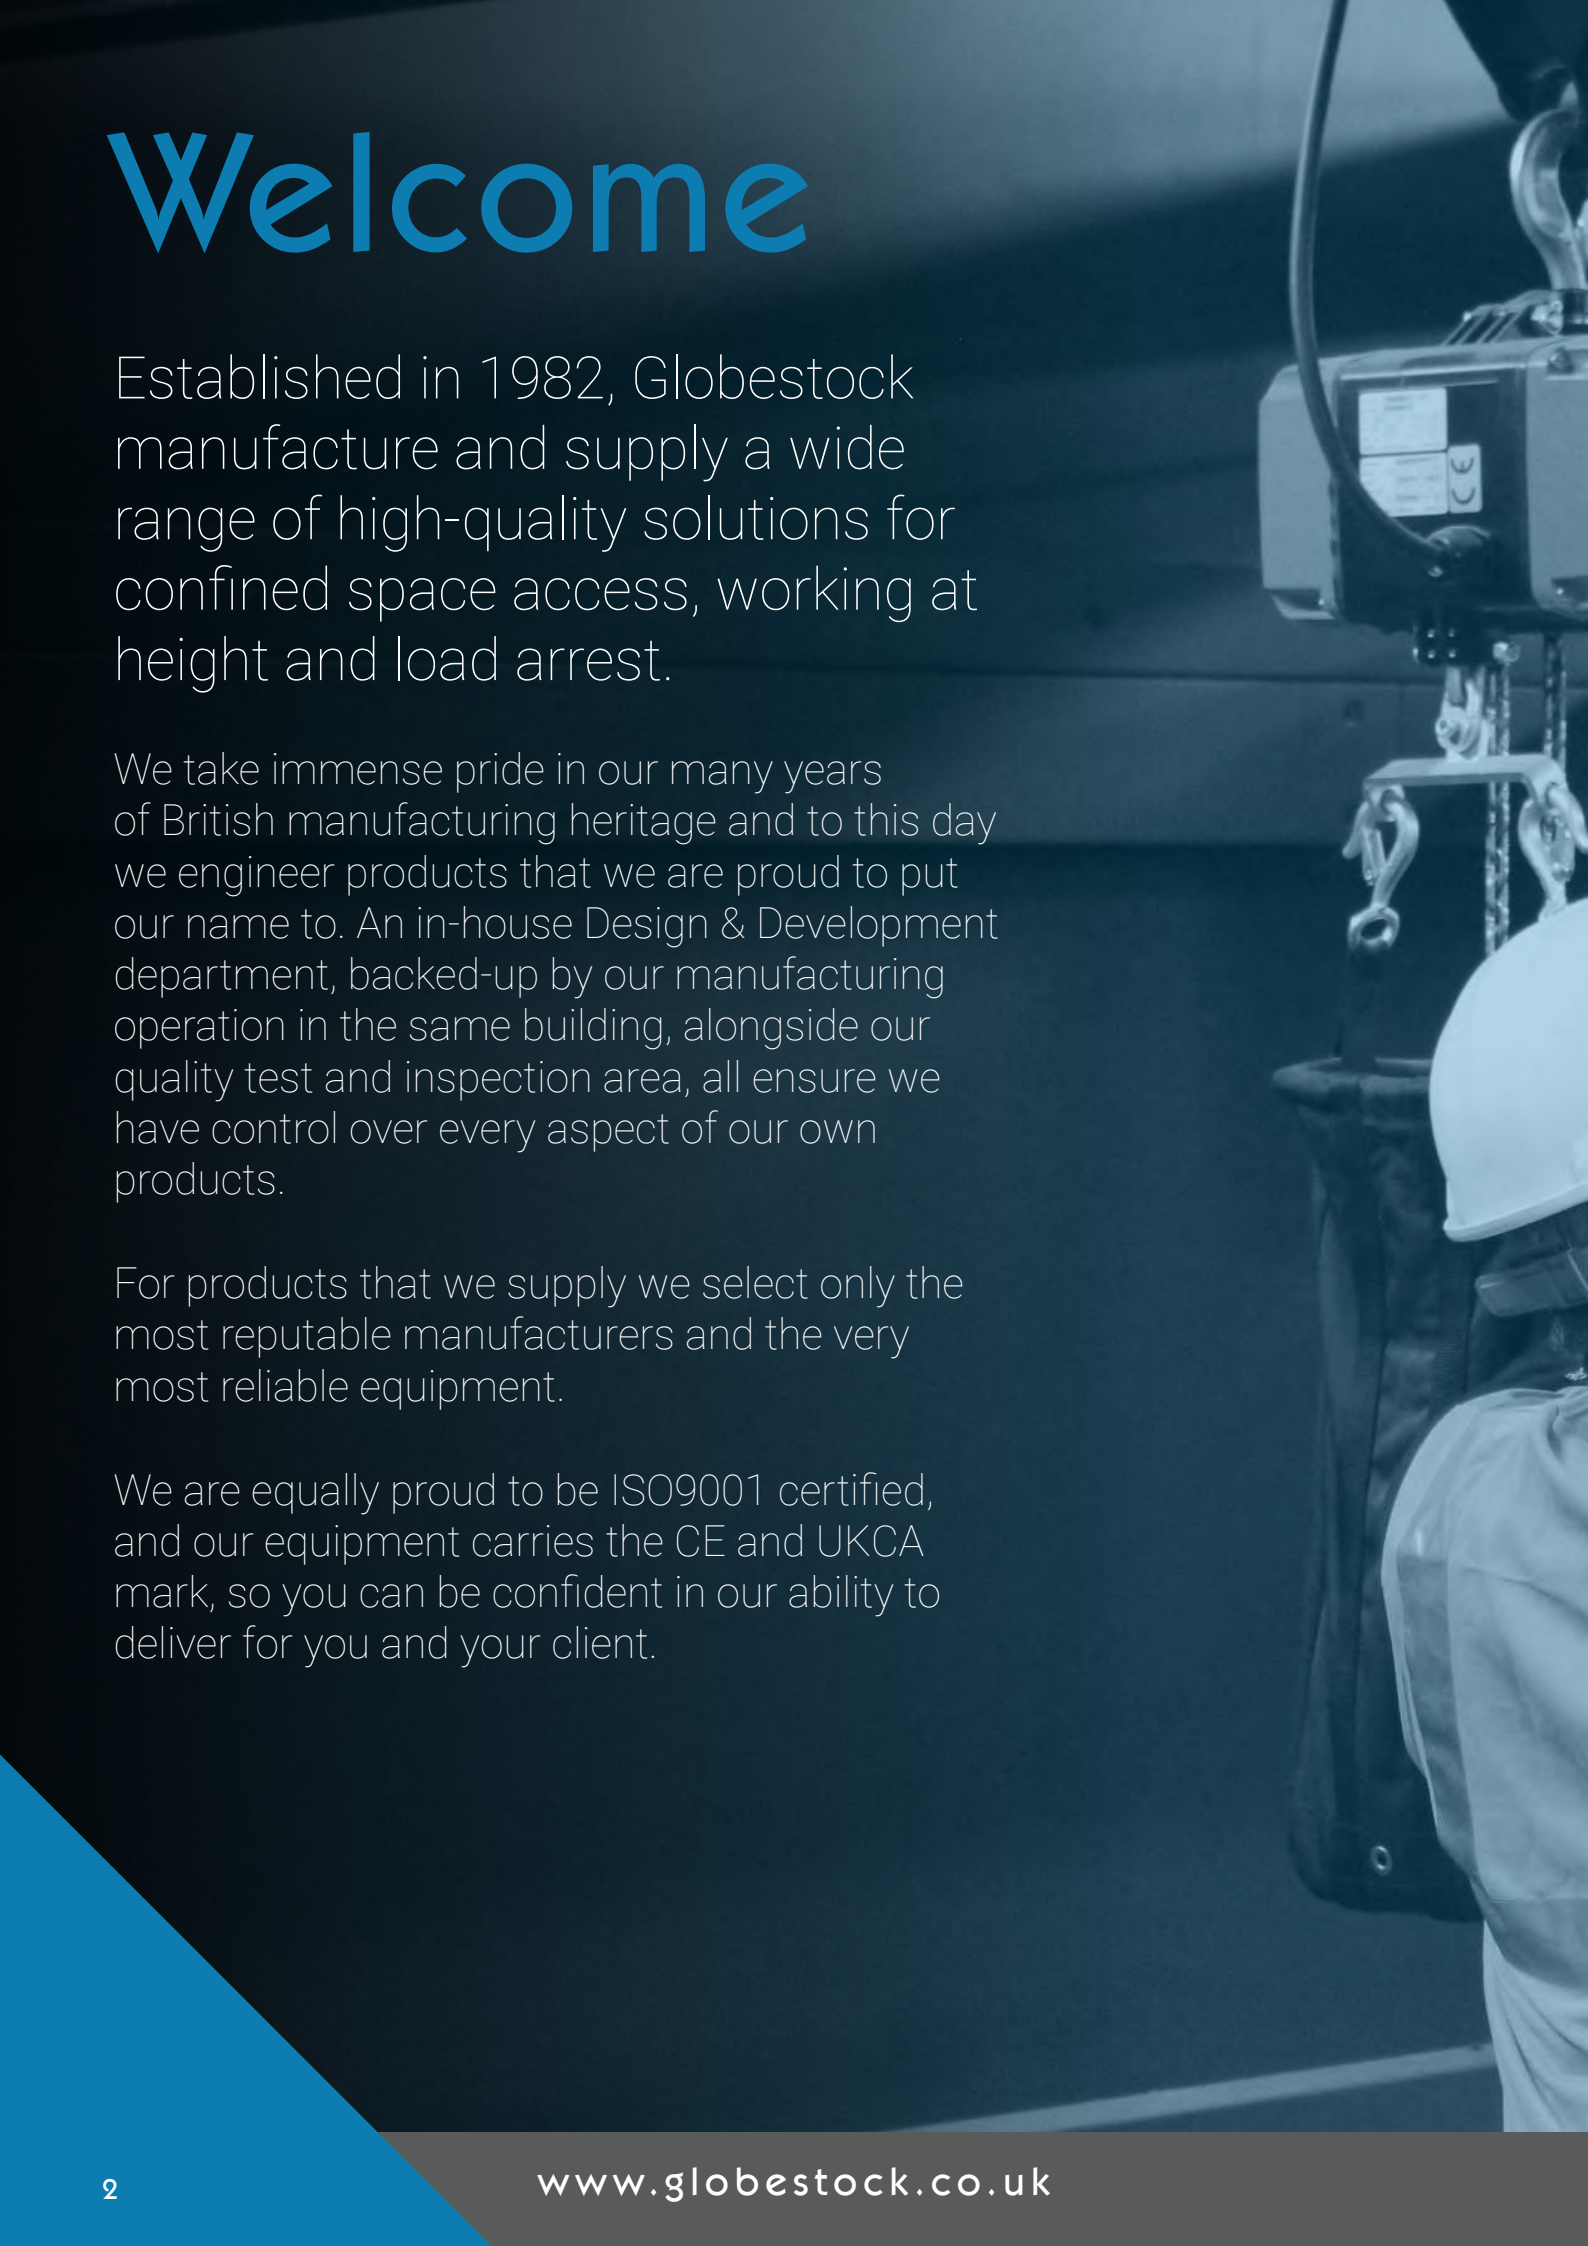

Established in 1982, Globestock manufacture and supply a wide range of high-quality solutions for confined space access, working at height and load arrest.

We take immense pride in our many years of British manufacturing heritage and to this day we engineer products that we are proud to put our name to. An in-house Design & Development department, backed-up by our manufacturing operation in the same building, alongside our quality test and inspection area, all ensure we have control over every aspect of our own products.

For products that we supply we select only the most reputable manufacturers and the very most reliable equipment.

We are equally proud to be ISO9001 certified, and our equipment carries the CE and UKCA mark, so you can be confident in our ability to deliver for you and your client.



Information	2-9
Confined Spaces	9
G.Tripod	10-15
G.Saver	16-17
G.Winch	18-19
Working at Height	20
Safety Harness	21-23
Stretchers	24-25
G.Stop	26
G.AutoReel	27
Karabiners	27
Load Arrestors	28-29
<i>XTIRPA</i>	30-113
Index	114-115



info@globestock.co.uk



+44 (0)1691 654 966



Globestock Ltd
Mile Oak Industrial Estate
Maesbury Road
Oswestry
Shropshire
SY10 8GA
United Kingdom



Mon – Fri: 08:00 – 17:00
Closed weekends and bank
holidays.

Training

To complement our range of safety equipment, we offer a range of industry-leading training courses to support our customers.

- Product Awareness Sales Training
- Service Agent Training
- Inspection Training
- Train-the-trainer Inspection Training

Our outstanding courses can be tailored to suit your needs, and can be delivered on-site or at our dedicated training suite in Shropshire.

Globestock's trainers are highly qualified and experienced – with us you're learning from experts, and each course is supported by a library of carefully put together resources.

Support

Our knowledgeable staff are available on the phone to answer any questions that you may have. Whether you need technical guidance or marketing support, just give us a call or drop us an email and we'll be happy to assist.

Certifications



MADE IN
BRITAIN



WAHSA
WORK AT HEIGHT SAFETY ASSOCIATION



Company Registration Number: 01641128

VAT Registration Number: GB 372 3950 43

Our factory and processes



Design

Before manufacture can take place, Globestock's dedicated Design and Development team take designs all the way from initial concept to final certification.

Concept sketches, 3D CAD modelling, digital stress analysis, and prototyping are their thing.

Apart from developing exciting new products, having a dedicated D&D team means we can quickly react to any design-change requirements as necessary, ensuring exceptional high quality on an ongoing basis.



Welding

Exemplary welding is a real craft, developed over years of experience.

Our welders take immense pride in their work... it's all about consistency, precision and attention to detail.

This focus delivers flawless welds, which are critical when producing the most reliable safety equipment.





Inspection

All our materials and components are painstakingly checked against specific criteria before entering stock. Anything that's not up to scratch stops here.

The Goods-In Inspection stage protects against sub-standard components being used in products, further ensuring that only the highest standard of goods make it out the door.

Some say we're obsessive...
we're just very particular.



Materials

The majority of our raw materials are sourced from within the UK.

As well as keeping our carbon footprint down, sourcing locally wherever possible increases our control over what goes into products, thereby optimising the quality and trustworthiness of everything we manufacture.



Machining

CNC machines, operated by expert engineers, process the raw materials and castings, getting them ready for assembly.

Having this resource in-house gives us a huge amount of control over the manufacturing process, and allows the production team to immediately respond and assist with any design developments.

This ensures Globestock's products are always the best they possibly can be, giving end users complete confidence.



Quality Control

Before reaching the shelves, all machined components are subject to stringent checks.

Nothing gets passed these guys!

Strict attention to detail makes sure no sub-standard parts are used, so you can be reassured that every single unit produced is without fault.



Assembly

To make the final assembly, components are carefully put together by our highly trained bench technicians, who know the products like the back of their hands.

The expertise and professionalism of our people means consistency. It's vital that important details don't get missed.

Globestock always produce safety equipment of the highest standard, delivering peace of mind.



Testing

All of our fall arrest devices undergo a proof load test before being sent out of the door.

This final test is not required by any necessary standard, but we go beyond compliance to deliver extra confidence in the equipment.

Our customers depend on Globestock's products to perform and protect when it matters. These are products you can trust.

Industries



Construction

The construction industry is, unfortunately, still a major cause of fatalities and injuries worldwide, but the majority of accidents can be avoided with the right safety training and equipment.

Globestock are specialists in construction safety equipment for confined space access and working at height. We provide products that stand up to the tough conditions that are found on construction sites around the world. Whether you are at height on a scaffold or below ground in a sewer, our products offer dependable, long-serving protection.

Globestock are proud to work with some of the biggest names in UK construction, including Balfour Beatty, Barhale and Barratt Homes. Our products can be hired from leading hire shops or purchased outright from distributors, giving you the flexibility to suit your need.



Water & Utilities

Water, gas, electric, renewables and telecommunications industries all feature working environments that involve confined space access and work at height. Globestock are safety equipment experts, making height safety products specifically for these applications, right here in the UK. We also import the reknowned Xtirpa and KONG products.

All the products we offer are designed to meet the highest safety expectations that the industry demands, whilst delivering exceptional quality and reliability.

Whether you are working at height on a telecoms tower or in a confined space at a water treatment plant, Globestock's products offer dependable protection that is relied upon by some of the biggest names in the industry, including Severn Trent, Welsh Water and Thames Water.



Oil, Gas & Offshore

The offshore oil and gas industries have some of the world's toughest working environments, and have high expectations when it comes to the quality and durability of safety equipment.

Offshore companies around the globe use Globestock's working at height safety products to protect people working in hazardous situations, from the rigours of the North Sea to the demanding conditions of the Middle East.

Globestock also offer SRL fall arresters with stainless steel cable, offering resistance to the corrosion caused by offshore environments.

Confined spaces

Confined space access presents unique risks and challenges.

At Globestock we understand these risks, which is why we apply our engineering expertise to creating a range of equipment for working in confined spaces, delivering safety products you can trust.

All Globestock confined space access products are manufactured right here in the UK. Whatever the application, we offer market leading reliability in even the harshest environments.

Our other product ranges (from Xtirpa and KONG) have been carefully chosen after a thorough selection process, ensuring only the very best equipment is offered.

Depended upon by leading UK companies, including: Balfour Beatty, Barhale, Barratt Homes, Severn Trent, Welsh Water, Thames Water.



G.Tripod 230



2 Person

EN795

TS16415

2006/42/EC





The G.Tripod 230 is an EN795 (B) + TS16415 anchorage device that is durable and lightweight. It provides a secure and stable anchorage for confined space access.

It may be used as an anchor by more than one person simultaneously, providing the MWL is not exceeded.


Available in two different sizes:
Compact (GSE230C) / Standard (GSE230S)

- ♦ Three pulley head
- ♦ Robust and lightweight
- ♦ Simple folding design
- ♦ Two person
- ♦ Safety factor 10:1 at 200 kg

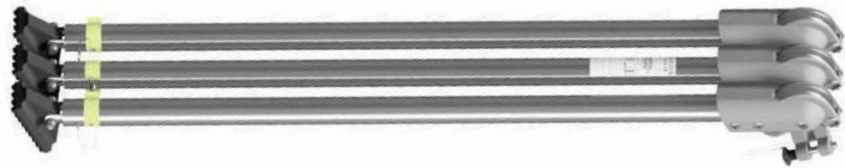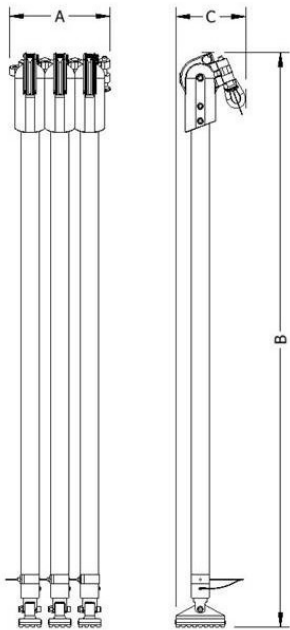

Folded dimensions (mm):

SIZE	A	B	C
COMPACT (GSE230C)	270	1217	180
STANDARD (GSE230S)	270	1527	180

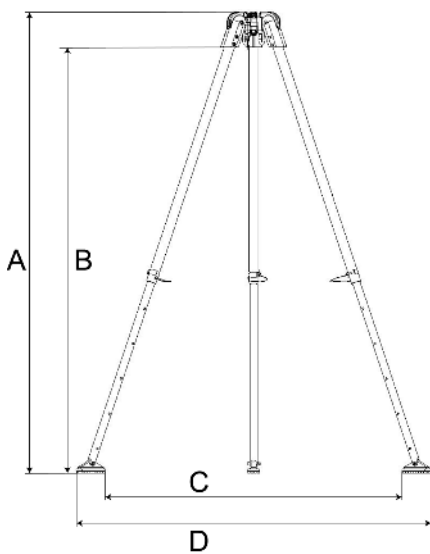

Assembled dimensions (mm):

SIZE / CODE	A	B	C	D
COMPACT (GSE230C) *	1131	963	841	1112
COMPACT (GSE230C) **	1747	1579	1315	1585
STANDARD (GSE230S) *	1421	1253	1064	1334
STANDARD (GSE230S) **	2307	2172	1744	2015

* at lowest setting

** at tallest setting



Available separately:
G.Tripod Leg Storage Strap
PRODUCT CODE: TLSS



G.Tripod Kits

Standard Tripod Kit 1

- ♦ G.Tripod 230S
- ♦ G.Saver II 14m
- ♦ Bracket



Standard Tripod Kit 5

- ♦ G.Tripod 230S
- ♦ G.Saver II 20m
- ♦ Bracket



Standard Tripod Kit 6

- ♦ G.Tripod 230S
- ♦ G.Winch 250kg 20m
- ♦ G.Saver II 20m
- ♦ Brackets



Standard Tripod Kit 7

- ♦ G.Tripod 230S
- ♦ G.Winch 250kg 20m
- ♦ G.Saver II 20m
- ♦ Rescue Harness
- ♦ Brackets



Standard Tripod Kit 2

- ♦ G.Tripod 230S
- ♦ G.Saver II 14m
- ♦ Bracket
- ♦ Rescue Harness



Standard Tripod Kit 3

- ♦ G.Tripod 230S
- ♦ G.Saver II 14m
- ♦ G.Winch 250kg 20m
- ♦ Brackets



Standard Tripod Kit 4

- ♦ G.Tripod 230S
- ♦ G.Saver II 14m
- ♦ G.Winch 250kg 20m
- ♦ Rescue Harness
- ♦ Brackets



Standard Tripod Kit 8

- ♦ G.Tripod 230S
- ♦ G.Saver II 34m
- ♦ Bracket



Standard Tripod Kit 9

- ♦ G.Tripod 230S
- ♦ G.Winch 250kg 40m
- ♦ G.Saver II 34m
- ♦ Brackets



Standard Tripod Kit 10

- ♦ G.Tripod 230S
- ♦ G.Winch 250kg 20m
- ♦ Brackets



Compact Tripod Kit 1

- ♦ G.Tripod 230C
- ♦ G.Saver II 14m
- ♦ Bracket



Compact Tripod kit 2

- ♦ G.Tripod 230C
- ♦ G.Saver II 14m
- ♦ Rescue Harness
- ♦ Bracket



Compact Tripod Kit 3

- ♦ G.Tripod 230C
- ♦ G.Saver II 14m
- ♦ G.Winch 250kg 20m
- ♦ Brackets



Compact Tripod Kit 4

- ♦ G.Tripod 230C
- ♦ G.Winch 250kg 20m
- ♦ G.Saver II 14m
- ♦ Rescue Harness
- ♦ Brackets



Compact Tripod Kit 5

- ♦ G.Tripod 230C
- ♦ G.Saver II 20m
- ♦ Bracket



Compact Tripod Kit 6

- ♦ G.Tripod 230C
- ♦ G.Saver II 34m
- ♦ Bracket



Arrester Brackets

GSE210UMB



GSE210LMB




GSE230AB14 (for 14m)
GSE230AB20 (for 20m)
GSE230AB34 (for 34m)

These arrester brackets enable a G.Saver II or G.Stop fall arrester to be securely fitted to a G.Tripod.

Arrester brackets for fitting to a 50 mm square anchorage device are also available.

G.Winch Brackets

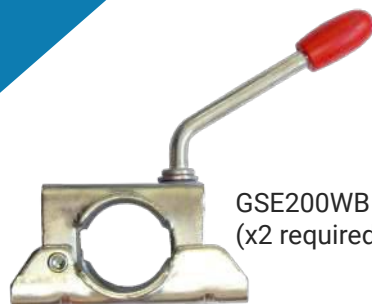

GSE200WB
(x2 required)



50 mm Square Anchorage
Bracket
GSE1081-04 (x2 required)

These brackets allow the G.Winch to be securely fitted to a G.Tripod. Two brackets are required to fit one winch.

G.Saver II



The G.Saver II is a fall arrest block that features a rescue winch for raising or lowering a fallen person to safety.

- ♦ Recovery winch with anti-run brake
- ♦ Shock absorbing brake mechanism
- ♦ Approx. 3m per minute retrieval
- ♦ Stopping distance 0.6 m to 1 m
- ♦ Fall indicator karabiner
- ♦ Top shackle included



MWL

EN1496

EN360



Product Code	Max. Rope Length	Rope Kit	MWL
GSE414G	14 m	Galv rope, alu karabiner	136 kg
GSE414SSK		Stainless steel rope & 'biner	
GSE420G	20 m	Galv rope, alu karabiner	
GSE420SSK		Stainless steel rope & 'biner	
GSE434G	34 m	Galv rope, alu karabiner	
GSE434SSK		Stainless steel rope & 'biner	



14 m

20-34 m

G.Winch



The G.Winch is specifically certified for the lifting of both personnel and loads.

- 136 kg to 250 kg MWL options
- Anti-run brake
- Up to 50 m rope (250 kg model max. 40 m)
- Heavy duty
- Galvanised or stainless steel cable
- Can be fitted to the G.Tripod (brackets required)

2006/42/EC





Product Code	MWL	Max. Rope Length	Rope Kit
GSE070-136-20SSK	136 kg	20 m	Stainless steel rope & karabiner
GSE070-136-40SSK		40 m	
GSE070-136-50SSK		50 m	
GSE070-200-20SSK	200 kg	20 m	Stainless steel rope & karabiner
GSE070-200-40SSK		40 m	
GSE070-250-20G	250 kg	20 m	Galv. rope & aluminium karabiner
GSE070-250-40G		40 m	

OPTIONAL WINCH ACCESSORIES



150 kg Lifting Pulley
GSE070USP



250 kg Lifting Pulley
GSE070250USP

Working at height

Working at height is a major cause of serious accidents globally.

In the UK, Globestock have been setting the benchmark for quality working at height equipment for more than 30 years. Safe working at height depends on workers not only having the right training but also, vitally, the right equipment.

When it comes to the right equipment we're experts, which is reflected in our products' design, materials, durability, and longstanding manufacturing heritage.

Working at Height Hierarchy of Controls:

Avoid

Do as much work as possible from the ground.


Prevent

Stop a fall from occurring with:

- A. collective prevention, such as a guard rail.
- B. personal prevention, such as a restraint lanyard.

Minimise

Minimise the potential fall distance and fall consequences with PPE.

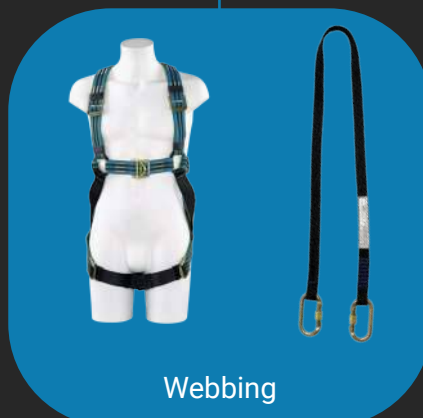

Webbing



Fall arrest

Safety Harness



The Globestock harness range provides a secure point of attachment during confined space operations or working at height, to be used in conjunction with a fall arrester and/or winch.

Globestock has two types of harness available, the Rescue Harness and the Quick Fit Rescue Harness (see overleaf). Both come with three attachment points to ensure a secure connection in any situation. Harness shoulder yokes are also available; these provide additional support and comfort for the user while wearing the harness.



EN361

EN1497



All harnesses are supplied in size large as standard, please contact us for other size options.

	Three Bar Slide			Quick Fit Buckle		Quick Release Buckle		Attachment Points			Yoke Options	
	Shoulder Adjustment	Leg Adjustment	All Round Chest Adjustment	Shoulder Adjustment	Leg Adjustment	Chest - Fixed	Leg Adjustment	EN361 Rear D	EN361 Front D	EN1497 Overhead	Standard Shoulder Yoke	Deluxe Shoulder Yoke
Rescue Harness	X	X					X	X	X	X	X	
Quick Fit Rescue Harness			X	X	X	X		X	X	X	X	X

Rescue Harness

Product Code	Yoke	Standard	MWL
GSE1301B	No shoulder yoke	EN361 EN1497	150 kg
GSE1303B	With shoulder yoke		

The Rescue Harness ensures the user is safe and secure during both access and rescue.

Features three attachment points, including an overhead rescue strap. The harness comes with 3 bar slide and rectangular linkage, on the leg and chest, while alloy rings are incorporated to interconnect the shoulder and chest straps. Adjustable length shoulder straps with a 3 bar buckle ensure the chest strap is positioned over the sternum comfortably and correctly.

- Overhead rescue strap
- Adjustable leg & shoulder straps
- EN361 rear D
- EN361 front D
- EN1497 overhead D
- Polyester webbing with heat treated zinc plated carbon steel fittings and anodised alloy rings



EN361

EN1497



The Rescue Harness is also available with a shoulder yoke.

This perforated, retrofit harness yoke can be fitted to the Rescue Harness, providing additional support and comfort for the user while wearing the harness.

Quick Fit Rescue Harness

Product Code	Yoke	Standard	MWL
GSE1302B	No shoulder yoke	EN361 EN1497	150 kg
GSE1304B	With shoulder yoke		
GSE1305B	With Deluxe shoulder yoke		

The Quick Fit Rescue Harness is designed for easy use with Quick Fit buckles to adjust the fit for the user.

The Quick Fit Rescue Harness comes fitted with 3 attachment points, along with 3 bar slide and rectangular link chest connection. Fitted with adjustable length leg loops and shoulder straps with a quick fit buckle to ensure the straps are positioned easily and correctly. The full chest strap wraps all the way around the chest, providing an exceptionally secure and comfortable configuration, which improves load distribution when using the front "D" ring.

- ♦ All round chest adjustment
- ♦ Shoulder & leg quick fit adjustment buckle
- ♦ Overhead rescue strap
- ♦ EN361 rear D
- ♦ EN361 front D
- ♦ EN1497 overhead D
- ♦ Polyester webbing with heat treated zinc plated carbon steel fittings and anodised alloy rings



The Quick Fit Rescue Harness is also available with a Standard or Deluxe Yoke.

The deluxe, padded harness yoke is available with the Quick Fit Rescue Harness. Providing superior shoulder comfort for the user with integrated padding, while also providing additional support while in operation.



Stretchers



The ROLLY Stretcher is designed for confined space rescue, with a flexible and light-weight design.

- Hanging kit for vertical transportation in wells or tunnels
- Hanging kit for horizontal winching
- Increased thickness providing greater resistance to rubbing, user protection and greater stability during use
- Easy maintenance with replaceable components
- Can be used in conjunction with the HALF ROLLY stretcher
- Side handles for easy transportation



Carry Bag For
ROLLY and HALF
ROLLY
(included)



The HALF ROLLY Stretcher is ideal for rescue from confined and narrow spaces.

- Rollable structure allows for flexibility during use, storage and transportation
- Hanging kit for vertical transportation
- Easy maintenance with replaceable components
- Can be used as an immobiliser during vertical use with the ROLLY stretcher
- Side handles for easy transportation



Product	Product Code	Material	Weight (kg)	Length (cm)	Width (cm)
ROLLY	GSE1360	PE/Nylon	7.3	245	60
HALF ROLLY	GSE1361	PE/Nylon	5	135	60

Evacuation Triangle



The Pegasus Evacuation Triangle is designed for easy and rapid evacuation.

- 15 independent attachment hoops
- Supplied with compact carry bag
- Designed for easy and rapid evacuation
- Rear handle for connection of guide rope or cabin retrieval
- Universal size

Product Code	Weight (g)	Material	Maximum Load (kg)
GSE1362	690	Nylon/ Cordura	200



Compact Carry Bag (included)



G.Stop



The G.Stop is a durable fall arrest block with a steel cable. Engineered to remain in service for longer.

- ♦ Shock absorbing brake mechanism
- ♦ Stopping distance 0.6 m to 1 m
- ♦ Auto-lock, fall indicator karabiner
- ♦ Aluminium casing

136kg
MWL

EN360



Product Code*	Max. Rope Length	MWL	Approx. Weight	Options
GSE507G	7 m	136 kg	10 kg	Stainless steel rope.
GSE514G	14 m		11 kg	
GSE520G**	20 m		15 kg	
GSE528G**	28 m		18.5 kg	
GSE534G**	34 m		21 kg	

* with 5 mm galvanised steel rope and fall indicator karabiner (fitted as standard). Shackle included.

** casing shape differs to that pictured.

G.Autoreel

The G.AutoReel inertia reel is an excellent lightweight, compact solution.

Weighing just 1.25 kg (complete with Equal D karabiner 1080-01), it is a fall arrester that can be used as a safe alternative to a shock absorbing lanyard. This type of product is also known as a retractable lanyard.



EN360



GSE1050 (with
Equal D karabiner
1080-01)

GSE1050SC
(with scaffold
karabiner 1080-
03)

- ♦ Lightweight & compact
- ♦ 1.25 kg (inc. 1080-01)
- ♦ Integrated shock absorber
- ♦ Fall indicator
- ♦ 2.5 m
- ♦ 140 kg max. working load

Karabiners



070k



107k



1080-01



1080-03

EN362



Other connectors available on request.

Load Arrestors



‘Load arrestors’ are heavy-duty fall arrest blocks for protecting equipment that is suspended at height.

They provide a secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or fixed anchorage. If the primary device fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting any people below.

Globestock’s G.Guard load arrestors have a high-strength retractable rope that extracts and retracts, following the movement of the load. This means that G.Guards can be fitted to equipment that needs to be moved (dynamic loads), as well as to non-moving (static) loads. G.Guards are a cost-effective, straight-forward way of managing risk.

- ♦ Shock absorbing brake cushions the fall
- ♦ High grade galvanised steel rope is fitted as standard on all models. Stainless steel rope is available as an option (fitting stainless steel rope may affect the MWL, contact us for details).

2006/42/EC





GSE300-10G



GSE300-15G
GSE300-20G
GSE300-25G
GSE500-10G
GSE500-15G
GSE500-20G
GSE500-24G



GSE1000-10G



300kg

MWL Load Arrestors

Product Code	Rope Length
GSE300-10G	10 m
GSE300-15G	15 m
GSE300-20G	20 m
GSE300-25G	25 m



500kg

MWL Load Arrestors

Product Code	Rope Length
GSE500-10G	10 m
GSE500-15G	15 m
GSE500-20G	20 m
GSE500-24G	24 m



1000kg

MWL Load Arrestors

Product Code	Rope Length
GSE1000-10G	10 m

Shackles included. Galvanised steel is fitted as standard. Stainless steel is also available. Also available in black.

A black and white photograph of an XTIRPA telescopic boom crane mounted on a rooftop. The crane's boom is extended upwards and to the left, with the brand name 'XTIRPA' visible on its side. The base of the crane is on a flat roof surface, and a building with several windows is in the background. A large, bold, yellow 'XTIRPA' logo with a 'TM' symbol is superimposed over the center of the image. A yellow diagonal graphic element is in the bottom-left corner.

XTIRPATM



610 Davit	32 - 45
1200 Davit	46 - 53
2450 Davit	54 - 57

Trench Davit System	58 - 63
Guard Rail Davit System	64 - 67
H-Base Davit System	68 - 71
Pole Hoist Davit System	72 - 76
Swivel Wall Plate	77
Hitch Mount System	78 - 83
Counterweight Davit System	84 - 91
Manhole Collar System	92 - 98
Fall Arrest Post	100 - 101
Anchor Device for Drilling	102 - 103
XLT Davit System	104 - 107
Manhole Cover Lifter	108 - 109
Ladder Adapter	110
Davit Accessories	111
Brackets	112 - 113

610 / 76mm Short Reach Davit Arms



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C

IN-2210

610mm davit arm with secondary block adapter for fall protection and retrieval, Used in conjunction with mast IN-2003 and appropriate base/system or manhole guard. Quick and easy three pin assembly.

Product Specification

Dimensions (mm)	L 1436-1896 x W 148 x H 286
Weight (kg)	16
Main Material	Aluminium





IN-2363

For use with manhole collar bases (p. 92-96) or trench mount bases (p.59-60). Cannot be used with fixed bases. Low clearance integrated mast and davit arm.

Product Specification	
Dimensions (mm)	L 348 x W 76 x H 920
Weight (kg)	7
Main Material	Aluminium



IN-2395

For use with fixed bases only (p. 35-37). Possibility to use extensions to increase height of the mast.

Available with anodised finish (IN-2395P)

Product Specification	
Dimensions (mm)	L 469 x W 76 x H 920
Weight (kg)	10
Main Material	Aluminium



IN-2483

For use with trench mount bases only (p. 59-60). Equipped with a 22kN anchor point. Offers the possibility of installing a winch or retractable lifeline.

Product Specification	
Dimensions (mm)	L 730 x W 124 x H 1606
Weight (kg)	23
Main Material	Aluminium



610 Davit Masts



IN-2044

Product Specification	
Height (mm)	381
Weight (kg)	9.1
Main Material	Steel



IN-2109

Product Specification	
Height (mm)	457
Weight (kg)	10.9
Main Material	Steel



IN-2045

Product Specification	
Height (mm)	610
Weight (kg)	11.8
Main Material	Steel



IN-2003



Product Specification	
Height (mm)	1145
Weight (kg)	10
Main Material	Aluminium

EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C



OSHA




610 Davit Bases Zinc Coated





IN-2106

76mm
Floor
Base




IN-2107

76mm
Wall Base




IN-2137

76mm
Centre
Floor
Base



IN-2114

76mm
Flush
Floor
Base



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C



OSHA




610 Davit Bases 304 Stainless Steel




IN-2005

76mm
Floor
Base




IN-2105

76mm
Centre
Floor
Base




IN-2007

76mm
Fresh
Concrete
Base




IN-2006

76mm
Flush
Floor
Base



IN-2013

76mm
Wall Base



IN-2067

76mm
Wall Base
(365mm
clearance)




IN-2124

76mm
Wall Base
(203mm
clearance)




IN-2097

76mm
Sleeve
Base




610 Davit Bases 316 Marine Grade





IN-2311

76mm
Floor
Base




IN-2327

76mm
Wall Base




IN-2329

76mm
Centre
Floor
Base




IN-2325

76mm
Flush
Floor
Base



IN-2326

76mm
Fresh
Concrete
Base




610 Davit Bases Mobile / Shoring Bases



IN-2315

51-127mm
Barrel
Base
(Zinc)



IN-2021

0-76mm
Barrel
Base
(304 SS)




IN-2129

0-76mm
Barrel
Base
(Zinc)




IN-2482

51-267mm
Shoring
Box



IN-2008

105-400mm
Adjustable
Wall Base



IN-2168

152-1143mm
Adjustable
Wall Base




IN-2075

305-800mm
Adjustable
Wall Base



IN-2125

610-1143mm
Shoring
Adjustable
Wall Base



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C



OSHA



Wall Mount Davit 610 Kits

Wall Mount Davit 610 Kit 1



Wall Mount Davit 610 Kit 2



610 Wall Mount Kits


	Kit 1	Kit 2
610mm Davit Arm	X	X
1145mm Davit Mast	X	X
Wall Mount Base	X	X
G.Saver II 14m	X	X
G.Winch 20m		X
Fall Arrest Bracket	X	X
Winch Bracket		X

Standard Davit 610 Kits

Standard Davit 610 Kit 1



Standard Davit 610 Kit 2

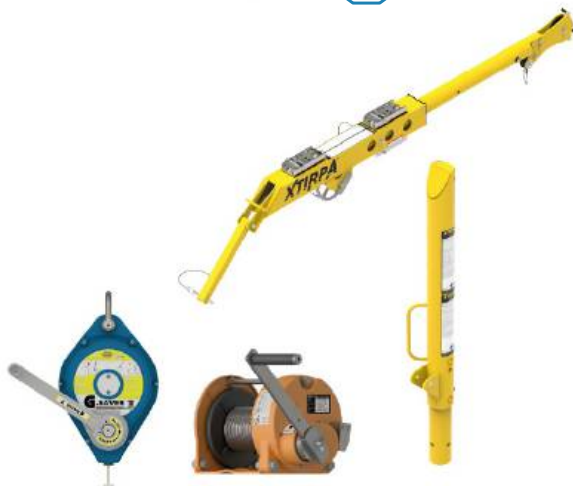

Standard Davit 610 Kit 3



Standard Davit 610 Kit 4



Standard Davit 610 Kit 5



610 Standard Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
IN-2210 610mm Davit Arm	X	X	X	X	X
IN-2003 1145mm Davit Mast	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Offset Winch Adapter					

Trench Davit 610 Hire Kits

610 Trench Hire Kits

	Kit 1	Kit 2
76mm Shoring Base	X	X
IN-2483 Mast & Davit Arm	X	
IN-2210 610mm Davit Arm		X
76mm Mast		X

Trench Davit 610 Hire Kit 1



Trench Davit 610 Hire Kit 2



Trench Davit 610 Kits

Trench Davit 610 Kit 1



Trench Davit 610 Kit 2



Trench Davit 610 Kit 3



Trench Davit 610 Kit 4



Trench Davit 610 Kit 5



Trench Davit 610 Kit 6



Trench Davit 610 Kit 7



Trench Davit 610 Kit 8



Trench Davit 610 Kit 9



Trench Davit 610 Kit 10



Trench Davit 610 Kit 11



Trench Davit 610 Kit 12



Trench Davit 610 Kit 13



Trench Davit 610 Kit 14



Trench Davit 610 Kit 15



Trench Davit 610 Kit 16



610 Trench Davit Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8	Kit 9	Kit 10	Kit 11	Kit 12	Kit 13	Kit 14	Kit 15	Kit 16
IN-2483 Mast-Davit Arm	X	X	X	X	X	X	X	X	X	X						
IN-2210 610mm Davit Arm											X	X	X	X	X	X
IN-2003 Davit Mast											X	X	X	X	X	X
Barrel Base (51-127mm)	X	X	X	X	X						X	X	X			
Shoring Base (51-267mm)						X	X	X	X	X				X	X	X
G.Saver II 14m	X	X				X	X				X			X		
G.Saver II 20m			X	X				X	X			X			X	
G.Saver II 34m					X					X			X			X
G.Winch 20m		X		X			X		X		X	X	X	X	X	
G.Winch 40m					X					X						X
Fall Arrest Bracket	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Winch Bracket		X		X	X		X		X	X	X	X	X	X	X	X
Offset Winch Adapter		X		X	X		X		X	X						

Floor Mount Davit 610 Kits

Floor Mount Davit 610 Kit 1



Floor Mount Davit 610 Kit 2



Floor Mount Davit 610 Kit 3



Floor Mount Davit 610 Kit 4



Floor Mount Davit 610 Kit 5



610 Floor Mount Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
IN-2210 610mm Davit Arm	X	X	X	X	X
IN-2003 Davit Mast	X	X	X	X	X
Centre Floor Mount Base	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Offset Winch Adapter					



1200 Davit Arms



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C

IN-2237

Extendable davit arm (762-1219mm) for fall protection and retrieval. Used in conjunction with mast IN-2240 or IN-2313. Equipped with 2268kg anchor point.

Product Specification

Dimensions (mm)	L 1422-1965 x W 165 x H 977-1326
Weight (kg)	23
Main Material	Aluminium



1200 Davit Masts



IN-2426

Product Specification	
Height (mm)	508
Weight (kg)	5
Main Material	Aluminium



IN-2240



Product Specification	
Height (mm)	1067
Weight (kg)	11
Main Material	Aluminium



IN-2313

Product Specification	
Height (mm)	1524
Weight (kg)	16
Main Material	Aluminium



- EN795
- TS16415
- Z359.1
- Z259.2.1-98
- 1910.66 App C
- ANSI
- SP
- OSHA
- CE

1200 Davit Bases 316 Marine Grade




IN-2452

102mm
Floor
Base




IN-2451

102mm
Centre
Floor
Base



IN-2468

102mm
Wall
Base




1200 Davit Bases 304 Stainless Steel





IN-2238

102mm
Floor
Base




IN-2253

102mm
Wall Base




IN-2254

102mm
Centre
Floor
Base




IN-2266

102mm
Flush
Floor
Base




IN-2383

102mm
Fresh
Concrete
Base




IN-2255

102mm
Sleeve
Base



IN-2516

102mm
Top Wall
Base
(90°)



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C




1200 Davit Bases Fixed Zinc / Galv





IN-2302

Zinc plated
102mm
Floor Base




IN-2303

Zinc plated
102mm
Wall Base




IN-2304

Zinc plated
102mm
Centre Floor
Base




IN-2527

Galv.
102mm
Floor
Base




IN-2528

Galv.
102mm
Wall
Base



IN-2529


Galv.
102mm
Centre
Floor
Base



1200 Davit Bases Mobile / Shoring Base

IN-2380

254-432mm
Adjustable
Wall Clamp



Trench Davit 1200 Kits

Trench Davit 1200 Kit 1



Trench Davit 1200 Kit 2



Trench Davit 1200 Kit 3



Trench Davit 1200 Kit 4



Trench Davit 1200 Kit 5



1200 Trench Davit Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
1200mm Extendable Davit Arm	X	X	X	X	X
1067mm Davit Mast	X	X	X	X	X
Adjustable Clamp (254-433mm)	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Winch Adapter		X		X	X

Standard Davit 1200 Kits

Standard Davit 1200 Kit 1



Standard Davit 1200 Kit 2



Standard Davit 1200 Kit 3



Standard Davit 1200 Kit 4



Standard Davit 1200 Kit 5



1200 Standard Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
1200mm Extendable Davit Arm	X	X	X	X	X
1067mm Davit Mast	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Winch Adapter		X		X	X

Floor Mount Davit 1200 Kits

Floor Mount Davit 1200 Kit 1



Floor Mount Davit 1200 Kit 2



Floor Mount Davit 1200 Kit 3



Floor Mount Davit 1200 Kit 4



Floor Mount Davit 1200 Kit 5



1200 Floor Mount Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
1200mm Extendable Davit Arm	X	X	X	X	X
1067mm Davit Mast	X	X	X	X	X
Centre Floor Mount	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Winch Adapter		X		X	X

1200 Flush Floor & Wall Mount Kits

Flush Floor Davit 1200 Kit 1



Flush Floor Davit 1200 Kit 2



Wall Mount Davit 1200 Kit 1




Wall Mount Davit 1200 Kit 2



1200 Flush Floor & Wall Mount Kits

	Flush Floor		Wall Mount	
	Kit 1	Kit 2	Kit 1	Kit 2
1200mm Extendable Davit Arm	X	X	X	X
1067mm Davit Mast	X	X	X	X
Flush Floor Base	X	X		
Wall Mount Base			X	X
G.Saver II 14m	X	X	X	X
G.Winch 20m		X		X
Fall Arrest Bracket	X	X	X	X
Winch Bracket		X		X
Winch Adapter		X		X

2450 Davit Arms

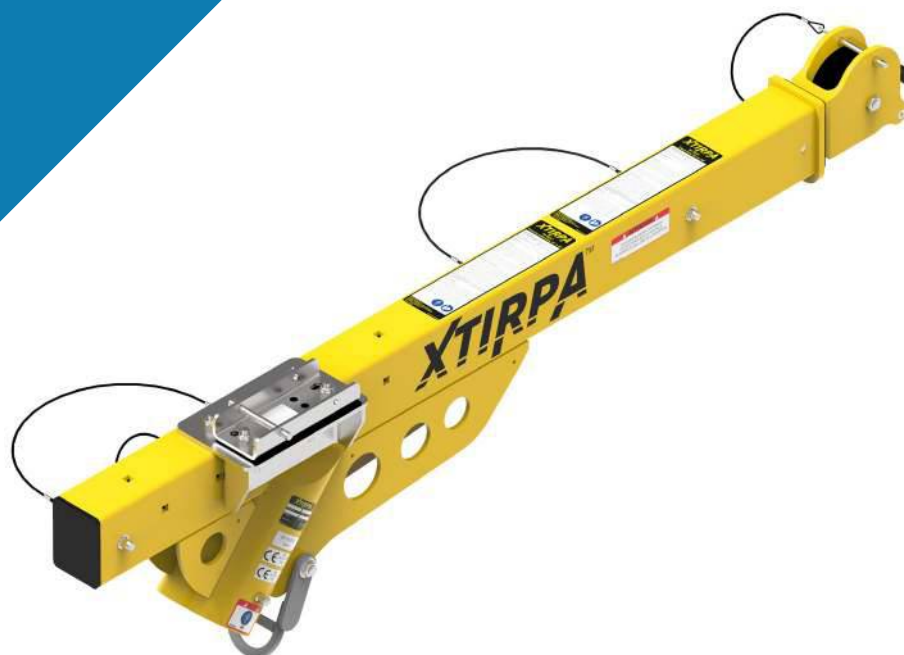

IN-2197

Long reach davit arm extendable between 1524-2438 mm for fall protection & retrieval. The system has three separate anchor points, each with a rating of 164kg MWL.



EN795

TS16415

Z359.1

1910.66 App C

Product Specification

Dimensions (mm)	L 2493-3498 x W 260 x H 642
Weight (kg)	62
Main Material	Aluminium



2450 Masts



IN-2470

Product Specification	
Height (mm)	610
Weight (kg)	9
Main Material	Aluminium



IN-2199



Product Specification	
Height (mm)	1067
Weight (kg)	15
Main Material	Aluminium



IN-2414

Product Specification	
Height (mm)	1372
Weight (kg)	20
Main Material	Aluminium

2450 Bases


IN-2200

Sleeve Base
(304 SS)




IN-2201

104mm
Centre
Floor
Base
(304 SS)




IN-2420

104mm
Wall
Mount
Base
(304 SS)




IN-2544

104mm
Centre
Floor
Base
(316 SS)



IN-2546

104mm
Centre
Floor
Base
(304 SS)



2450 Davit Kits

Standard Davit 2450 Kit 1



Standard Davit 2450 Kit 2



Standard Davit 2450 Kit 3



Floor Mount Davit 2450 Kit 1



Floor Mount Davit 2450 Kit 2



Floor Mount Davit 2450 Kit 3



Wall Mount Davit 2450 Kit 1



Wall Mount Davit 2450 Kit 2



Wall Mount Davit 2450 Kit 3



2450 Davit Kits	Standard			Floor Mount			Wall Mount		
	Kit 1	Kit 2	Kit 3	Kit 1	Kit 2	Kit 3	Kit 1	Kit 2	Kit 3
1524-2450mm Extendable Davit Arm	X	X	X	X	X	X	X	X	X
IN-2199 Davit Mast	X	X	X	X	X	X	X	X	X
Centre Floor Mount				X	X	X			
Wall Mount Base							X	X	X
G.Saver II 14m	X			X			X		
G.Saver II 20m		X			X			X	
G.Saver II 34m			X			X			X
G.Winch 20m	X	X		X	X		X	X	
G.Winch 40m			X			X			X
Fall Arrest Bracket	X	X	X	X	X	X	X	X	X
Winch Bracket	X	X	X	X	X	X	X	X	X



Trench Davit System

164kg
MWL

EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C



For work areas that require regular setup and removal, but where a permanently fixed base and conventional access is not viable.

Adjustable base systems are an ideal solution, consisting of an adjustable base, mast and davit arm.

These versatile, lightweight, reliable and easy-to-install systems facilitate access to vertical confined spaces where various cement or steel walls are available to use as an anchor point.

The universal mast and davit arm allow for fall protection and retrieval and can be used and installed in many different adjustable bases.




Trench Davit System

Bases



IN-2315

51-127mm
Barrel
Base
(zinc
plated)



IN-2021

0-76mm
Barrel
Base
(304 SS)




IN-2129

0-76mm
Barrel
Base
(zinc
plated)




IN-2482

51-267mm
Shoring
Box



IN-2008

105-400mm
Adjustable
Wall Base



IN-2251

305-762mm
Adjustable
Wall Base




IN-2075

305-800mm
Adjustable
Wall Base



IN-2125

610-1143mm
Shoring
Adjustable
Wall Base



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C




OSHA



Trench Davit System

IN-2380

254-432mm
Adjustable
Wall Camp



Trench Davit System

610 Kits

Trench Davit 610 Kit 1



Trench Davit 610 Kit 2



Trench Davit 610 Kit 3



Trench Davit 610 Kit 4



Trench Davit 610 Kit 5



Trench Davit 610 Kit 6



Trench Davit 610 Kit 7



Trench Davit 610 Kit 8



Trench Davit 610 Kit 9



Trench Davit 610 Kit 10



Trench Davit 610 Kit 11



Trench Davit 610 Kit 12



Trench Davit 610 Kit 13



Trench Davit 610 Kit 14



Trench Davit 610 Kit 15



Trench Davit 610 Kit 16



610 Trench Davit Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8	Kit 9	Kit 10	Kit 11	Kit 12	Kit 13	Kit 14	Kit 15	Kit 16
IN-2483 Mast-Davit Arm	X	X	X	X	X	X	X	X	X	X						
IN-2210 610mm Davit Arm											X	X	X	X	X	X
IN-2003 Davit Mast											X	X	X	X	X	X
Barrel Base (51-127mm)	X	X	X	X	X						X	X	X			
Shoring Base (51-267mm)						X	X	X	X	X				X	X	X
G.Saver II 14m	X	X				X	X				X			X		
G.Saver II 20m			X	X				X	X			X			X	
G.Saver II 34m					X					X			X			X
G.Winch 20m		X		X			X		X		X	X	X	X	X	
G.Winch 40m					X					X						X
Fall Arrest Bracket	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Winch Bracket		X		X	X		X		X	X	X	X	X	X	X	X
Offset Winch Adapter		X		X	X		X		X	X						

Trench Davit System

1200 Kits

Trench Davit 1200 Kit 1



Trench Davit 1200 Kit 2



Trench Davit 1200 Kit 3



Trench Davit 1200 Kit 4



Trench Davit 1200 Kit 5



1200 Trench Davit Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5
1200mm Extendable Davit Arm	X	X	X	X	X
1067mm Davit Mast	X	X	X	X	X
Adjustable Base (254-433mm)	X	X	X	X	X
G.Saver II 14m	X	X			
G.Saver II 20m			X	X	
G.Saver II 34m					X
G.Winch 20m		X		X	
G.Winch 40m					X
Fall Arrest Bracket	X	X	X	X	X
Winch Bracket		X		X	X
Winch Adapter		X		X	X

Guard Rail Davit System


Guard rail systems are used when an exposed entry point needs to be guarded.

This highly portable system has an integrated mast which is used in conjunction with a davit arm to provide fall protection, entry and retrieval capabilities.

The guard rail system facilitates access to underground chambers or any other type of confined space where an entry point should be protected.

When not in use, the guard rail folds down flat for simple storage.

May be used in the open V position pictured below (rear stabiliser A2108-18 or -20 required).

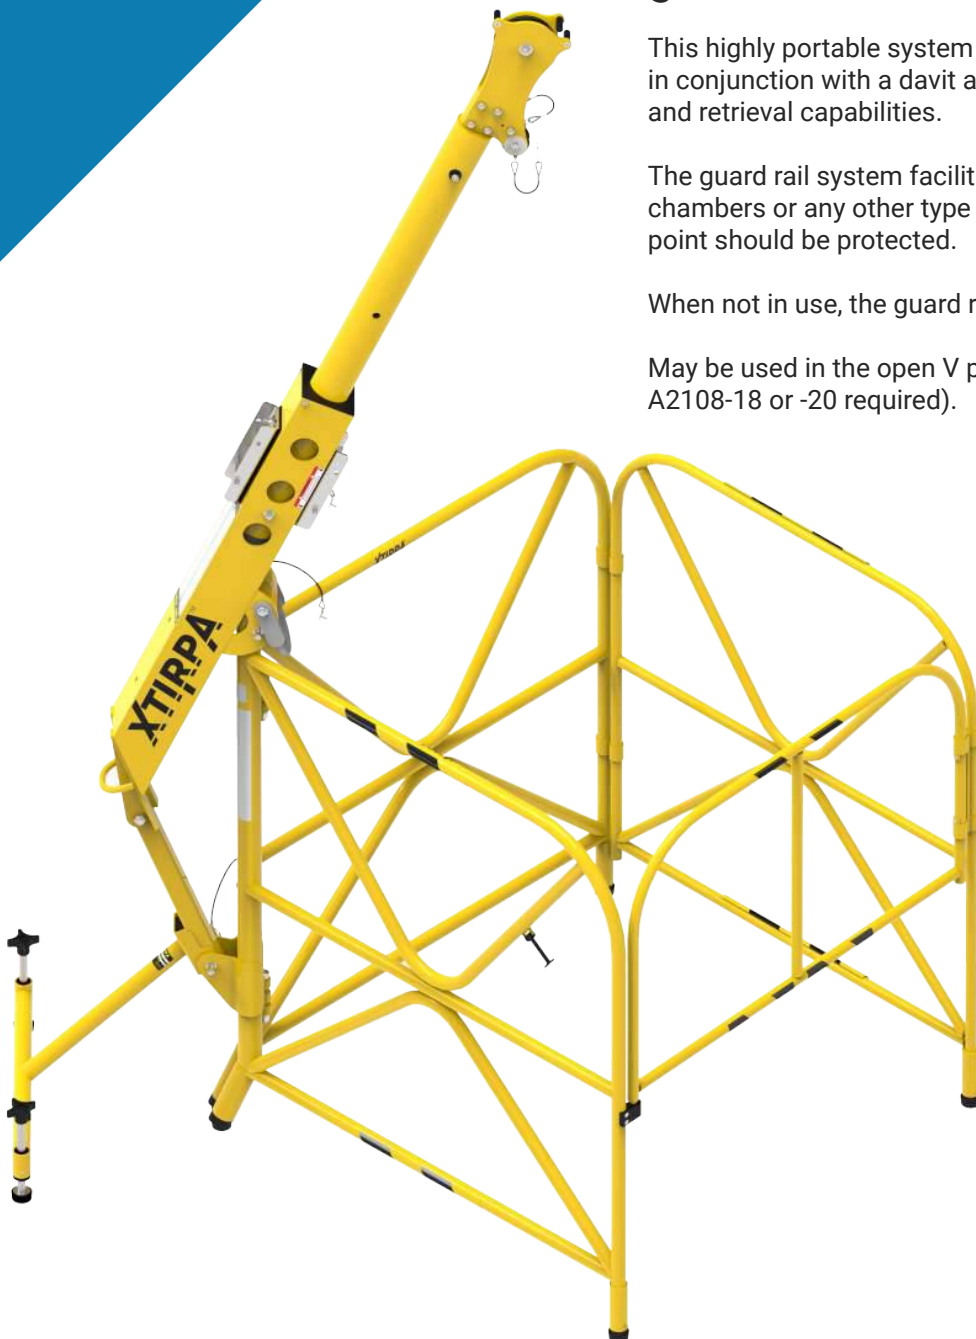

Guard Rail Davit Bases



IN-2108

Portable manhole guard with integrated mast and gate, used in conjunction with IN-2210 davit arm.



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C

Product Specification

Dimensions (mm)	L 992 x W 947 x H 1133
Weight (kg)	15
Main Material	Aluminium



IN-2324

Large portable manhole guard with integrated mast and gate. Used in conjunction with the IN-2210 davit arm.

Product Specification	
Dimensions (mm)	L 1320 x W 1320 x H 1136
Weight (kg)	22
Main Material	Aluminium

IN-2101

Multifunctional portable barricade allows worker to assemble additional sections as needed to create a safe working area.

Product Specification	
Dimensions (mm)	L 965 x W 965 X H 1068
Weight (kg)	12
Main Material	Aluminium



A2108-18



A2108-20



A2101-07



A2191-04

Guard Rail Davit Kits

Guardrail Davit Kit 1



Guardrail Davit Kit 2



Guardrail Davit Kit 3



Guardrail Davit Kit 4



Guardrail Davit Kit 5




Guardrail Davit Kit 6



Guardrail Davit Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5	Kit 6
1067mm Manhole Guard with Mast	X	X	X	X	X	X
Manhole Guard Stabiliser			X	X	X	X
610mm Davit Arm	X	X	X	X	X	X
G.Saver II 14m	X	X	X	X		
G.Saver II 20m					X	
G.Saver II 34m						X
G.Winch 20m		X		X	X	
G.Winch 40m						X
Fall Arrest Bracket	X	X	X	X	X	X
Winch Bracket		X		X	X	X

H-Base Davit System

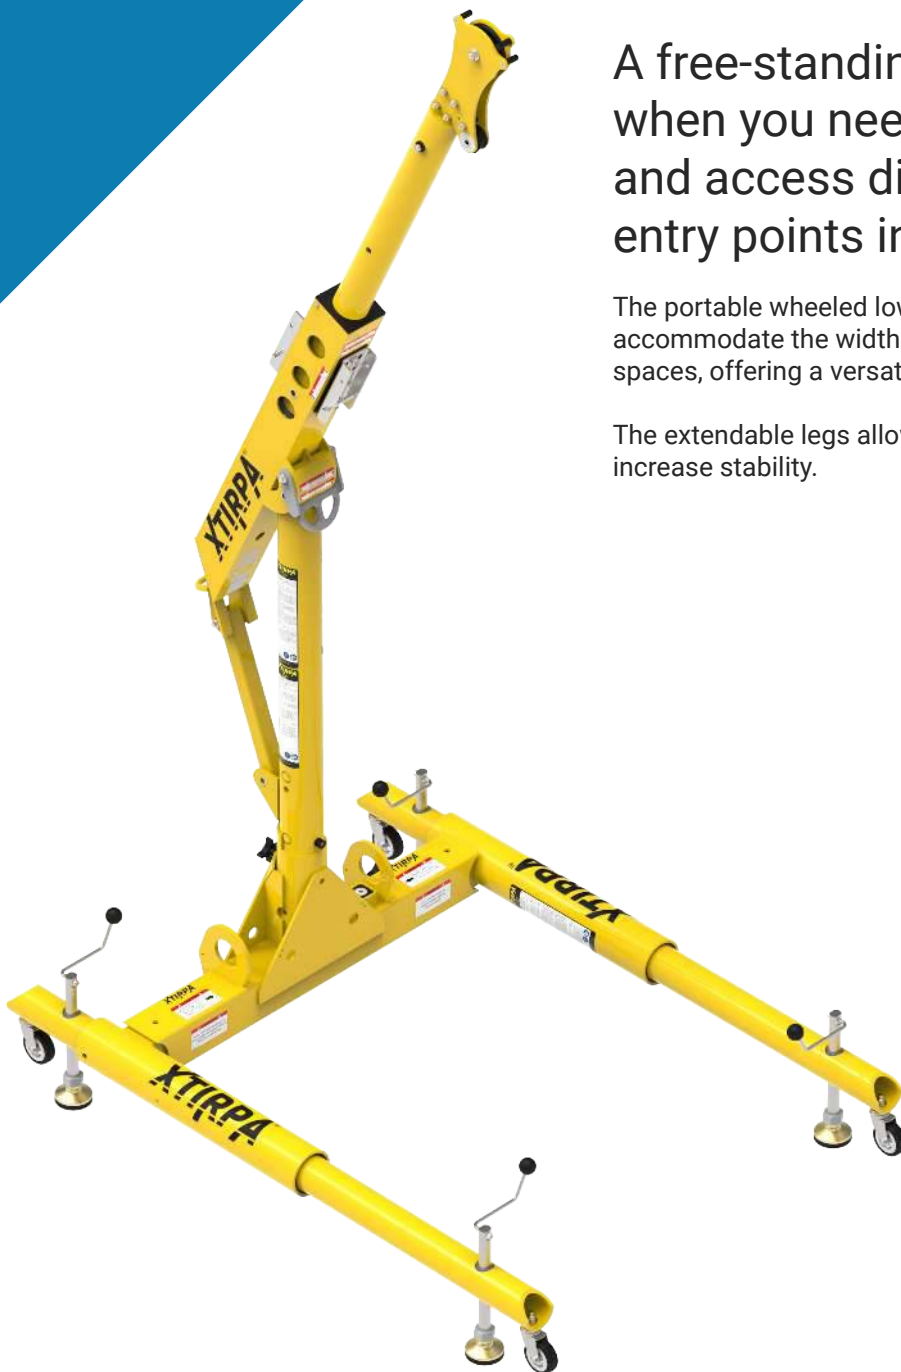

A free-standing system is ideal when you need to move the davit and access different confined space entry points in the same area.

The portable wheeled lower base allows for adjustment to accommodate the width and length of most standard confined spaces, offering a versatile confined space access solution.

The extendable legs allow for access to wider entries and increase stability.



H-Base



EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C

IN-2118

Three-piece extendable H base that adjusts to fit most standard confined spaces. Castors make the base easy to relocate.

Product Specification

Dimensions (mm)	L 1092-1689 x W 1473 x H 463-558
Weight (kg)	43
Main Material	Aluminium



H-Base Davit Kits

H-Base Standard Davit Kit 1



H-Base Standard Davit Kit 2



H-Base Standard Davit Kit 3



H-Base Standard Davit Kit 4



H-Base Kits

	Kit 1	Kit 2	Kit 3	Kit 4
1270mm H-Base	X	X	X	X
610mm Mast-Davit Arm				
IN-2210 610mm Davit Arm	X	X	X	X
IN-2003 Davit Mast	X	X	X	X
G.Saver II 14m	X	X		
G.Saver II 20m			X	
G.Saver II 34m				X
G.Winch 20m		X	X	
G.Winch 40m				X
Fall Arrest Bracket	X	X	X	X
Winch Bracket		X	X	X



Pole Hoist System



Horizontal entry to confined spaces.

A range of anchorages and pole hoists with adjustable lengths offer a versatile and dependable system for horizontal access and rescue.



Pole Hoists

Pole hoist system with swivel-head for vertical and horizontal retrieval and fall arrest. Extends with two fixed angles. Use with a certified anchor point. Includes mounting bracket A2002-31.



IN-2337



Product Specification	
Dimensions (mm)	L 1588-2032 x W 152 x H 285
Weight (kg)	10
Main Material	Aluminium



IN-2338

Product Specification	
Dimensions (mm)	L 1869-2656 x W 152 x H 312
Weight (kg)	10
Main Material	Aluminium



EN795

Z359.1

Z259.2.1-98

1910.66 App C



OSHA



T-Bars

IN-2127



Adjustable T-bar attaches to swivel-head pole hoist IN-2337 or IN-2338 for base stability of the system.

Product Specification

Dimensions (mm)	L 913-1218 x W 762 x H 51
Weight (kg)	4
Main Material	Aluminium

IN-2256



Longer adjustable T-bar attaches to swivel-head pole hoist IN-2337 or IN-2338 for base stability of the system.

Product Specification

Dimensions (mm)	L 1189-1900 x W 762 x H 51
Weight (kg)	4
Main Material	Aluminium

IN-2274



Short adjustable T-bar attaches to swivel-head pole hoist IN-2337 or IN-2338 for base stability of the system.

Product Specification

Dimensions (mm)	L 332-378 x W 752 x H 51
Weight (kg)	2
Main Material	Aluminium

EN795

Z359.1

Z259.2.1-98

1910.66 App C



Pole Hoist Anchorages

IN-2242



Anchor point for vertical and horizontal entry with the pole hoist system. Can be used on round or square flange.

Product Specification	
Dimensions (mm)	L 393.6 x W 286 x H 287
Weight (kg)	15
Main Material	Steel

IN-2241



This jib adapter is positioned outside of the confined space's entry point allowing for lateral entry. Typically used with tanks when walls are too thin for anchoring.

Product Specification	
Dimensions (mm)	L 992 x W 830 x H 2260-2775
Weight (kg)	48
Main Material	Aluminium

IN-2087



Universal ring adapter, use on ceiling or wall with pole hoist system. Use horizontally or vertically.

Product Specification	
Dimensions (mm)	L 317.5 x W 203 x H 111
Weight (kg)	6
Main Material	Stainless Steel



Pole Hoist Kits

Pole Hoist Kit 1



Pole Hoist Kit 2



Pole Hoist Kit 3



Pole Hoist Kit 4



Pole Hoist Kits


	Kit 1	Kit 2	Kit 3	Kit 4
IN-2127 T-Bar Leg	X	X	X	X
IN-2337 Pole Hoist Arm	X	X	X	X
Lateral Entry Adapter				X
G.Saver II 14m	X			X
G.Saver II 20m		X		
G.Saver II 34m			X	
Fall Arrest Bracket	X	X	X	X

Swivelling Wall Plate

Used to install a fall arrester and/or winch below a pulley system for confined space access. Use with concrete walls.






IN-2314



Product Specification

Dimensions (mm)	L 229 x W 238 x H 330
Weight (kg)	21
Main Material	Stainless Steel

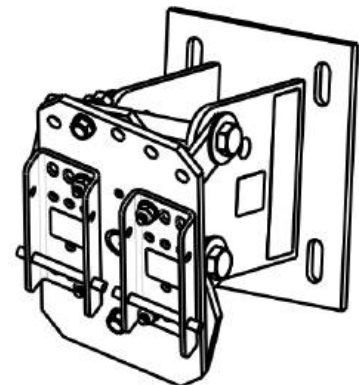

Hitch Mount System

The hitch mount davit system provides a portable confined space access system with a hitch attachment for vehicles and other anchor points.



Components




IN-2204

Hitch mount with 1524mm wide stabiliser connects to 51mm square vehicle hitches. Comes with adjustable screw pads.

Product Specification

Dimensions (mm)	L 1521 x W 1083 x H 612-801
Weight (kg)	20
Main Material	Aluminium



IN-2126

Hitch mount with 610mm wide stabiliser connects to 51mm square vehicle hitches. Comes with adjustable screw pads.

Product Specification

Dimensions (mm)	L 610 x W 1083 x H 612-762
Weight (kg)	15
Main Material	Aluminium



A2126-10

This hitch mount extension attaches to hitch mount IN-2126 or IN-2204 and provides a 90° extension for hitch mount system.

Product Specification

Dimensions (mm)	L 1321
Weight (kg)	28
Main Material	Steel



Components & Clamps

A2126-69



This mount extension attaches to hitch mount IN-2126 or IN-2204 and provides an additional 1008mm of length.

Product Specification

Dimensions (mm)	L 1008
Weight (kg)	7.18
Main Material	Steel

A2126-09



This mount extension attaches to hitch mount IN-2126 or IN-2204 and provides an additional 1829mm of length.

Product Specification

Dimensions (mm)	L 1935
Weight (kg)	14
Main Material	Steel

IN-2517



This adapter allows the hitch stabiliser systems to be used with the some types of European vehicle hitches.

Product Specification

Dimensions (mm)	L 337 x W 102 x H 102
Weight (kg)	8
Main Material	Steel





A2126-21

Portable anchor bolt adapter for hitch mount.

Product Specification

Dimensions (mm)	H 518 x W 337 x L 159
Weight (kg)	16
Main Material	Steel



A2126-14

406mm C-Clamp adapter

Product Specification

Dimensions (mm)	H 736 x W 178 x L 171
Weight (kg)	17
Main Material	Steel



A2126-33

597mm C-Clamp adapter (long)

Product Specification

Dimensions (mm)	H 889 x W 178 x L 171
Weight (kg)	19
Main Material	Steel



A2126-50

Short mezzanine C-Clamp adapter

Product Specification

Dimensions (mm)	H 729 x W 667 x L 368
Weight (kg)	27
Main Material	Steel

EN795

Z359.1

Z259.2.1-98

1910.66 App C



Hitch Mount Kits

Mezzanine Floor Clamp Kit 1



Portable Anchor Clamp Kit 1



Portable Anchor Clamp Kit 2



Vehicle Hitch Kit 1



Vehicle Hitch Kit 2



Vehicle Hitch Kit 3



Hitch Mount Kits	Mezzanine	Portable	
		Kit 1	Kit 2
A2126-50 C-Clamp	X		
A2126-33 C-Clamp		X	
A2126-21 Anchor Bolt			X
Hitchmount with 1524mm Stabiliser	X	X	X
A2126-69 Extension	X	X	X
IN-2210 610mm Davit Arm	X	X	X
IN-2003 Davit Mast	X	X	X
G.Saver II 14m	X	X	X
G.Winch 20m	X	X	X
Fall Arrest Bracket	X	X	X
Winch Bracket	X	X	X

Vehicle Hitch Kits	Kit 1	Kit 2	Kit 3
Hitchmount with 1524mm Stabiliser	X	X	X
A2126-69 Extension	X	X	X
European Vehicle Hitchmount	X	X	X
90° Extension			X
IN-2210 610mm Davit Arm	X	X	X
IN-2003 Davit Mast	X	X	X
G.Saver II 14m	X	X	X
G.Winch 20m		X	X
Fall Arrest Bracket	X	X	X
Winch Bracket		X	X

Counterweight Davit System

A counterweight system is ideal when you need to move and access various confined spaces entry points in the same area.

Consisting of a central base unit with a number of options for anchoring, positioning, leg adjustment and extension, this is a system designed for versatility.




Bases & Components



IN-2525

Wheeled counterweight cart attaches to T-base IN-2305 via an extension. Castors enable easy movement.

Product Specification	
Dimensions (mm)	L 1308 x W 1206 x H 1090-1281
Weight (kg)	220
Main Material	Steel & Aluminium

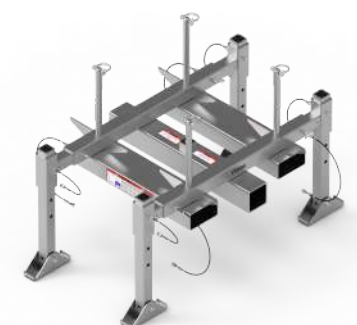

A2305-90

Static counterweight cart attaches to T-base IN-2305 via an extension. Features forklift slots for lifting.

Product Specification	
Dimensions (mm)	L 1181-1257 x W 813 x H 637-870
Weight (kg)	84
Main Material	Zinc Plated Steel



IN-2305

Portable T-base for confined space fall arrest and retrieval. Attaches to counterweight cart via extensions A2305-16 or -40. Castors enable easy movement.

Product Specification	
Dimensions (mm)	L 1740 x W 559 x H 475
Weight (kg)	33
Main Material	Aluminium





A2305-25

Reducer for 1829mm extension.

Product Specification

Dimensions (mm)	L 456 x W 87.4 x H 87.4
Weight (kg)	7



A2305-16

1829mm extension connects to T-base IN-2305 using reducer A2305-25.

Product Specification

Dimensions (mm)	L 2023 x W 5.4 x H 5.4
Weight (kg)	22



A2305-40

2438mm extension tube for counterweight T-base.

Product Specification

Dimensions (mm)	L 2438
Weight (kg)	44



P2525-017

Weight plate for counterweight trolley or support.
Number of plates required varies. 50lbs / 22.68kg

Product Specification

Dimensions (mm)	L 406 x W 305 x H 25.4
Weight (kg)	22.7



A2305-53

Adjustable height leg

Wheeled Cart 610 Counterweight Kits

Wheeled Cart 610 Counterweight Kit 1



Wheeled Cart 610 Counterweight Kit 2



Wheeled Cart 610 Counterweight Kit 3



Wheeled Cart 610 Counterweight Kit 4



Wheeled Cart 610 Counterweight Kit 5



Wheeled Cart 610 Counterweight Kit 6



Wheeled Cart 610 Counterweight Kit 7



Wheeled Cart 610 Counterweight Kit 8



Static Cart 610 Counterweight Kits

Static Cart 610 Counterweight Kit 1



Static Cart 610 Counterweight Kit 2



Static Cart 610 Counterweight Kit 3



Static Cart 610 Counterweight Kit 4



Water Counterweight Kits

Water Counterweight Kit 1



Wheeled Cart 1200 Counterweight Kits

Wheeled Cart 1200 Counterweight Kit 1



Wheeled Cart 1200 Counterweight Kit 2



Wheeled Cart 1200 Counterweight Kit 3



Static Cart 1200 Counterweight Kits

Static Cart 1200 Counterweight Kit 1



Static Cart 1200 Counterweight Kit 2



Static Cart 1200 Counterweight Kit 3



Counterweight Davit Kits



Wheeled Cart 610 Counterweight Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8
Hitchmount with 1524mm Stabiliser	X	X	X	X	X	X	X	X
A2126-69 Extension	X	X	X	X				
Counterweight Base Adapter 51-89mm	X	X	X	X	X	X	X	X
Counterweight Trolley	X	X	X	X	X	X	X	X
50lbs Weight Plate	10x	10x	10x	10x	19x	19x	19x	19x
IN-2210 610mm Davit Arm	X	X	X	X	X	X	X	X
IN-2003 Davit Mast	X	X	X	X	X	X	X	X
G.Saver II 14m	X	X			X	X		
G.Saver II 20m			X		X		X	
G.Saver II 34m				X				X
G.Winch 20m		X	X			X	X	
G.Winch 40m				X				X
Fall Arrest Bracket	X	X	X	X	X	X	X	X
Winch Bracket		X	X	X		X	X	X

Static Cart 610 Counterweight Kits	Kit 1	Kit 2	Kit 3	Kit 4
Hitchmount with 1524mm Stabiliser	X	X	X	X
A2126-69 Extension	X	X	X	X
Counterweight Base 51-89mm	X	X	X	X
Counterweight Support	X	X	X	X
50lbs Weight Plate	14x	14x	14x	14x
IN-2210 610mm Davit Arm	X	X	X	X
IN-2003 Davit Mast	X	X	X	X
G.Saver II 14m	X	X		
G.Saver II 20m			X	
G.Saver II 34m				X
G.Winch 20m		X	X	
G.Winch 40m				X
Fall Arrest Bracket	X	X	X	X
Winch Bracket		X	X	X

1200 Counterweight Kits	Wheeled			Static			Water
	Kit 1	Kit 2	Kit 3	Kit 1	Kit 2	Kit 3	
Universal T-Base	X	X	X	X	X	X	X
A2305-40 Extension	X	X	X	X	X	X	X
Counterweight Trolley	X	X	X				
Counterweight Support				X	X	X	
Counterweight Bladder System							X
50lbs Weight Plate	23x	23x	23x	28x	28x	28x	
761-1219mm Extendable Davit Arm	X	X	X	X	X	X	X
IN-2240 Davit Mast	X	X	X	X	X	X	X
G.Saver II 14m	X			X			X
G.Saver II 20m		X			X		
G.Saver II 34m			X			X	
G.Winch 20m	X	X		X	X		
G.Winch 40m			X			X	X
Fall Arrest Bracket	X	X	X	X	X	X	X
Winch Bracket	X	X	X	X	X	X	X

Manhole Collar System

Manhole collar bases are designed for applications involving frequent set ups over circular openings.

This lightweight and easy to assemble system provides a portable base and certified anchor point. An ideal option for areas where a permanent anchor is not viable.

A wide range of sizes and accessories are available.



Manhole Collar Base

Standard



IN-2287

406 - 457mm
Diameter



IN-2219

457 - 508mm
Diameter



IN-2220

508 - 559mm
Diameter



IN-2221

559 - 610mm
Diameter



IN-2217

610 - 660mm
Diameter



IN-2222

660 - 711mm
Diameter



IN-2218

711 - 762mm
Diameter



IN-2167

762 - 813mm
Diameter



IN-2223

813 - 864mm
Diameter




IN-2224

864 - 914mm
Diameter



IN-2476

914 - 965mm
Diameter



IN-2269

813 - 1067mm
Diameter



IN-2180

1080 - 1118mm
Diameter

EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C



OSHA



Manhole Collar Base

Adjustable Angle



IN-2496

457 - 508mm
Diameter
0 - 30°



IN-2497

508 - 559mm
Diameter
0 - 30°



IN-2490

559 - 610mm
Diameter
0 - 30°



IN-2475

610 - 660mm
Diameter
0 - 45°



IN-2498

610 - 660mm
Diameter
0 - 30°



IN-2499

610 - 660mm
Diameter
0 - 30°



IN-2500

711 - 762mm
Diameter
0 - 30°



IN-2487

762 - 813mm
Diameter
0 - 30°

EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C




OSHA



Manhole Collar Base

Anodised



IN-2486P

406 - 456mm
Diameter
0 - 30°



IN-2496P

457 - 508mm
Diameter
0 - 30°



IN-2497P

508 - 559mm
Diameter
0 - 30°



IN-2490P

559 - 610mm
Diameter
0 - 30°



IN-2498P

610 - 660mm
Diameter
0 - 30°



IN-2499P

610 - 660mm
Diameter
0 - 30°



IN-2500P

711 - 762mm
Diameter
0 - 30°



IN-2487P

762 - 813mm
Diameter
0 - 30°

EN795

TS16415

Z359.1

Z259.2.1-98

1910.66 App C




OSHA



Manhole Collar Base

Non Standard



IN-2504

597 - 648mm
Splittable Manhole
Collar (0 - 45°)
Non-CE



IN-2534

400 - 600mm
Rectangular Manhole
Collar

Manhole Collar Accessories



IN-2009

762mm Cone
Shaped Safety Ring



IN-2543

699mm Cone
Shaped Safety Ring




IN-2010

Manhole Retaining
Ring




A2217-05

Ladder Adapter for
Manhole Collar



A2217-10

Manhole Collar
Seat



IN-2244

Positioning Seat



A2475-05

Manhole Collar
Stabiliser

Manhole Collar Kits

Standard



Manhole Collar Kit 1



Manhole Collar Kit 2



Manhole Collar Kit 3



Manhole Collar Kit 4



Manhole Collar Kit 5



Manhole Collar Kit 6



Manhole Collar Kit 7



Manhole Collar Kits

Anodised

Anodised Manhole Collar Kit 1



Anodised Manhole Collar Kit 2



Anodised Manhole Collar Kit 3



Anodised Manhole Collar Kit 4



Manhole Collar Kits

	Kit 1	Kit 2	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7
457-508mm Manhole Collar	X						
508-559mm Manhole Collar		X					
559-610mm Manhole Collar			X				
600-711mm Manhole Collar				X			
508mm 0-30° Manhole Collar					X		
559mm 0-30° Manhole Collar						X	
610mm 0-30° Manhole Collar							X
IN-2395 Mast-Davit Arm	X	X	X	X	X	X	X
G.Saver II 14m	X	X	X	X	X	X	X
G.Winch 20m	X	X	X	X	X	X	X
Fall Arrest Bracket	X	X	X	X	X	X	X
Winch Bracket	X	X	X	X	X	X	X
Offset Winch Adapter	X	X	X	X	X	X	X

Anodised Manhole Collar Kits

	Kit 1	Kit 2	Kit 3	Kit 4
457mm 0-30° Manhole Collar (Anodised)	X			
508mm 0-30° Manhole Collar (Anodised)		X		
559mm 0-30° Manhole Collar (Anodised)			X	
610mm 0-30° Manhole Collar (Anodised)				X
IN-2395P Mast-Davit Arm	X	X	X	X
G.Saver II 14m	X	X	X	X
G.Winch 20m	X	X	X	X
Fall Arrest Bracket	X	X	X	X
Winch Bracket	X	X	X	X
Offset Winch Adapter	X	X	X	X



Fall Arrest Post



IN-2104


Fall arrest mast, certified for three people. Equipped with swivel anchors allowing for 360° movement, and adjustable height.

Product Specification

Dimensions (mm)	L 229 x W 229 x H 1107-1580
Weight (kg)	24
Main Material	Aluminum

A2102-03

Fall arrest post anchorage base, secures fall arrest mast into position with M20x200 bolts or by welding.
Anchor bolts not included.

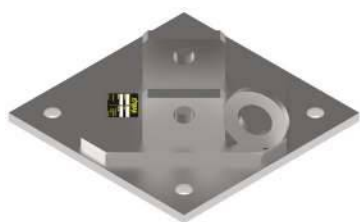

Product Specification

Dimensions (mm)	L 305 x W 305 x H 107
Weight (kg)	16
Main Material	Zinc Plated

Fall Arrest Post Kits

Fall Arrest Post Kit 1



Fall Arrest Post Kit 2



Fall Arrest Post Kit 3



Fall Arrest Post Kits

	Kit 1	Kit 2	Kit 3
Portable Fall Arrest Post	X	X	X
Anchorage Plate	X	2x	X
G.Autoreel 2.5m	X	X	2x



Anchor Device for Drilling



A5032-01

Anchor post. Installs on to the insertion mast. A lifeline may be tensioned between two posts to create a horizontal lifeline system.

Product Specification	
Dimensions (mm)	ø 79.4 x H 1067
Weight (kg)	13.6
Main Material	Steel



A5032-07

Self retracting lifeline support. Installs on to anchor post A5032-01.

Product Specification	
Dimensions (mm)	L 203 x W 102 x H 268
Weight (kg)	61
Main Material	Steel



A5032-35

Product Specification	
Diameter ø (mm)	89
Height (mm)	1346
Weight (KG)	16



A5032-40

Product Specification	
Diameter ø (mm)	102
Height (mm)	1346
Weight (KG)	14



A5032-45

Product Specification	
Diameter ø (mm)	114
Height (mm)	1346
Weight (KG)	16



A5032-50

Product Specification	
Diameter ø (mm)	127
Height (mm)	1346
Weight (KG)	18



A5032-55

Product Specification	
Diameter ø (mm)	140
Height (mm)	1346
Weight (KG)	21



A5032-60

Product Specification	
Diameter ø (mm)	152
Height (mm)	1346
Weight (KG)	23



A5032-65

Product Specification	
Diameter ø (mm)	165
Height (mm)	1346
Weight (KG)	25



A5032-80

Product Specification	
Diameter ø (mm)	203
Height (mm)	1346
Weight (KG)	21

XLT Davit System



IN-5039



EN795

Z359.1

Z259.2.1-98

1910.66 App C

4572 to 7620 mm adjustable mast and davit arm. 1829 mm reach, horizontal rail, trolley for self-retracting lifeline, locking mechanism, height adjustment crank, self-retracting lifeline adapter and adapter for optional winch. For use when working on elevated platforms.

Product Specification

Dimensions (mm)	L 1829 x W 394 x H 4572-7620
Weight (kg)	286
Main Material	Steel






IN-5040

Central Floor Base

Product Specification	
Dimensions (mm)	H 467 x W 432 x L 432
Weight (kg)	61
Main Material	Steel



A5039-12

Transport Base (with forklift slots)


Product Specification	
Dimensions (mm)	H 216 x W 1372 x L 1372
Weight (kg)	244
Main Material	Steel



A5039-17

Concrete Blocks (Set of 8)

Product Specification	
Dimensions (mm)	H 699 x W 441 x L 441
Weight (kg)	315
Main Material	Concrete

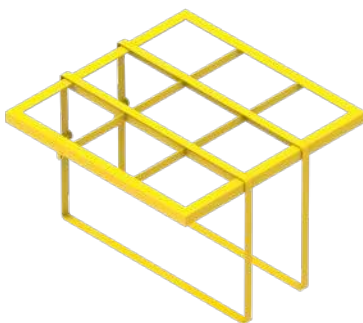

A5039-46

Retention Grid for concrete blocks

Product Specification	
Dimensions (mm)	H 63.5 x W 1371 x L 1371
Weight (kg)	41
Main Material	Steel

XLT Davit Accessories



A5039-45

Set of Bolts for XLT Base



A5039-57

Concrete Moulds

XLT Davit System Kits

XLT Mast Kits

	Fixed	Mobile
4.6m XLT Mast-Davit Arm	X	X
Floor Base	X	X
8x Concrete Blocks		X
Retention Grid		X
Travel Base		X
G.Stop 14m	X	X
G.Saver 20m	X	X
Fall Arrest Bracket	X	X

XLT Fixed Mast Kit 1



XLT Mobile Mast Kit 1





Manhole Cover Lifter



IN-2071

For easy handling of manhole covers. The ratchet system offers an ergonomically safe way to lift the toughest lids with less strain.

Product Specification	
Dimensions (mm)	H 1346 x W 216 x D 493
Weight (kg)	6
Main Material	Aluminium

Manhole Cover Hooks & Webbing



P2018-016

Webbing for Manhole
Cover Lifter



P2071-032P

Lifter Hook for 32mm
Hole



P2071-026P

Medium Square Hook
(High Profile)



P2071-023P

Large J Hook



P2071-022P

Medium Square Hook
(Low Profile)



P2071-021P

Small J Hook



P2071-018

Standard Manhole
Cover Hook

Ladder Adapters



A2217-17

Adapter for 190mm Ladder

Product Specification	
Dimensions (mm)	L 292 x W 156 x H 457
Weight (kg)	4
Main Material	Aluminium



A2217-25

Adapter with Locking System

Product Specification	
Dimensions (mm)	L 292 x W 171 x H 584
Weight (kg)	6
Main Material	Aluminium



A2217-36

Adapter with Centred Locking System

Product Specification	
Dimensions (mm)	L 356 x W 235 x H 533
Weight (kg)	6
Main Material	Aluminium

610 Davit



1200 Davit



2450 Davit



A2201-04

140mm to 102mm
Cylinder Reducer

**Davit
Accessories**

Recovery Device Brackets



GSEABX14

G.Saver II 14m



GSEABX20

G.Saver II 20m



GSEABX34

G.Saver II 34m



IN-2374

IKAR HRA-12



IN-2375

IKAR HRA-18



IN-2376

IKAR HRA-24



IN-2377

IKAR HRA-33



IN-2378

IKAR HRA-42



IN-2152

Protecta AD515



IN-2153

Miller 15m




IN-2177

Miller 30m



IN-2404

MSA Workman
Rescuer




IN-2424

Blocfor 20R



IN-2425

Blocfor 30R



IN-2539

Protekt CRW200



IN-2538

Protekt CRW300



IN-2540

Kratos Olympe

Winch Brackets



GSE200WBX

G.Winch



IN-2191

Miller Manhandler



IN-2464

Harken Lokhead



IN-2211

IKAR PLW
ISC RW020
Protekt 502 / 503

Index

#			
070k.....	27	A5032-60.....	103
107k.....	27	A5032-65.....	103
1080-01.....	27	A5032-80.....	103
1080-03.....	27	A5039-12.....	105
2450-DAVIT-KITS.....	56	A5039-13.....	105
		A5039-45.....	106
		A5039-46.....	105
		A5039-57.....	106
A		C	
A2101-07.....	66	COMPACT-TRIPOD-KITS.....	14
A2102-03.....	100	COUNTERWEIGHT-KITS.....	87,88,89
A2108-18.....	66		
A2108-20.....	66	F	
A2126-09.....	80	FALL-ARREST-POST-KITS.....	101
A2126-10.....	79	FLOOR-MOUNT-DAVIT-1200-KITS.....	52
A2126-14.....	81	FLOOR-MOUNT-DAVIT-610-KITS.....	44
A2126-21.....	81	FLUSH-FLOOR-1200-KITS.....	53
A2126-33.....	81		
A2126-50.....	81	G	
A2126-69.....	80	GSE070-136-20SSK.....	19
A2191-04.....	66	GSE070-136-40SSK.....	19
A2201-04.....	111	GSE070-136-50SSK.....	19
A2217-05.....	96	GSE070-200-20SSK.....	19
A2217-10.....	96	GSE070-200-40SSK.....	19
A2217-17.....	110	GSE070-250-20G.....	19
A2217-25.....	110	GSE070-250-40G.....	19
A2217-36.....	110	GSE070250USP.....	19
A2237-06.....	111	GSE070USP.....	19
A2237-17.....	111	GSE1000-10G.....	29
A2238-03.....	111	GSE1050.....	27
A2305-16.....	86	GSE1050SC.....	27
A2305-25.....	86	GSE1081-04.....	15
A2305-40.....	86	GSE1301B.....	22
A2305-53.....	86	GSE1302B.....	23
A2305-90.....	85	GSE1303B.....	22
A2395-06.....	111	GSE1304B.....	23
A2395-06P.....	111	GSE1305B.....	23
A2395-12.....	111	GSE1360.....	24
A2395-12P.....	111	GSE1361.....	24
A2475-05.....	96	GSE1362.....	25
A5032-01.....	102	GSE200WB.....	15
A5032-07.....	102	GSE210LMB.....	15
A5032-35.....	103	GSE210UMB.....	15
A5032-40.....	103	GSE230AB14.....	15
A5032-45.....	103	GSE230AB20.....	15
A5032-50.....	103	GSE230AB34.....	15
A5032-55.....	103	GSE230C.....	10
		GSE230S.....	10
		GSE300-10G.....	29
		GSE300-15G.....	29
		GSE300-20G.....	29
		GSE300-25G.....	29
		GSE414G.....	16
		GSE414SSK.....	16
		GSE420G.....	16
		GSE420SSK.....	16
		GSE434G.....	16
		GSE434SSK.....	16
		GSE500-10G.....	29
		GSE500-15G.....	29
		GSE500-20G.....	29
		GSE500-24G.....	29
		GSE507G.....	26
		GSE514G.....	26
		GSE520G.....	26
		GSE528G.....	26
		GSE534G.....	26
		GUARD-RAIL-DAVIT-KITS.....	67
		H	
		H-BASE-DAVIT-KITS.....	70
		HITCH-MOUNT-KITS.....	82
		I	
		IN-2003.....	34
		IN-2005.....	36
		IN-2006.....	36
		IN-2007.....	36
		IN-2008.....	38, 59
		IN-2009.....	96
		IN-2010.....	96
		IN-2013.....	36
		IN-2021.....	38, 59
		IN-2044.....	34
		IN-2045.....	34
		IN-2067.....	36
		IN-2071.....	108
		IN-2072.....	111
		IN-2075.....	38, 59
		IN-2085.....	36

IN-2087.....	75	IN-2315.....	38, 59	IN-2546.....	55
IN-2097.....	36	IN-2324.....	66	IN-5039.....	104
IN-2101.....	66	IN-2325.....	37	IN-504.....	105
IN-2104.....	100	IN-2326.....	37		
IN-2105.....	36	IN-2327.....	37	H	
IN-2106.....	35	IN-2329.....	37	MANHOLE-COLLAR-KITS.....	97, 98
IN-2107.....	35	IN-2337.....	73		
IN-2108.....	65	IN-2338.....	73	P	
IN-2109.....	34	IN-2363.....	33	P2018-016.....	109
IN-2114.....	35	IN-2374.....	112	P2071-018.....	109
IN-2118.....	69	IN-2375.....	112	P2071-021P.....	109
IN-2124.....	36	IN-2376.....	112	P2071-022P.....	109
IN-2125.....	38, 59	IN-2377.....	112	P2071-023P.....	109
IN-2126.....	79	IN-2378.....	112	P2071-026P.....	109
IN-2127.....	74	IN-2380.....	49, 60	P2071-032P.....	109
IN-2129.....	38, 59	IN-2383.....	48	P2525-017.....	86
IN-2137.....	35	IN-2395.....	33	POLE-HOIST-KITS.....	76
IN-2152.....	112	IN-2404.....	113		
IN-2153.....	113	IN-2414.....	55	S	
IN-2167.....	93	IN-2420.....	55	SA200WBX.....	113
IN-2177.....	113	IN-2424.....	113	STANDARD-DAVIT-610-KITS.....	40
IN-2180.....	93	IN-2425.....	113	STANDARD-DAVIT-1200-KITS.....	51
IN-2191.....	113	IN-2426.....	47	STANDARD-TRIPOD-KITS.....	12, 13
IN-2197.....	54	IN-2451.....	47		
IN-2199.....	55	IN-2452.....	47	T	
IN-2201.....	55	IN-2464.....	113	TRENCH-DAVIT-1200-KITS.....	50, 63
IN-2204.....	79	IN-2468.....	47	TRENCH-DAVIT-610-KITS.....	43, 61
IN-2210.....	32	IN-2470.....	55	TRENCH-DAVIT-610-HIRE-KITS.....	41
IN-2211.....	113	IN-2475.....	94		
IN-2217.....	93	IN-2476.....	93	W	
IN-2218.....	93	IN-2482.....	38, 59	WALL-MOUNT-DAVIT-1200-KITS.....	53
IN-2219.....	93	IN-2483.....	33	WALL-MOUNT-DAVIT-610-KITS.....	39
IN-2220.....	93	IN-2486P.....	95		
IN-2221.....	93	IN-2487.....	94	X	
IN-2222.....	93	IN-2487P.....	95	XLT-DAVIT-KITS.....	106
IN-2223.....	93	IN-2490.....	94		
IN-2224.....	93	IN-2490P.....	95		
IN-2237.....	46	IN-2496.....	94		
IN-2238.....	48	IN-2496P.....	95		
IN-2240.....	47	IN-2497.....	94		
IN-2241.....	75	IN-2497P.....	95		
IN-2242.....	75	IN-2498.....	94		
IN-2244.....	96	IN-2498P.....	95		
IN-2251.....	38, 59	IN-2499.....	94		
IN-2253.....	48	IN-2499P.....	95		
IN-2254.....	48	IN-2500.....	94		
IN-2255.....	48	IN-2500P.....	95		
IN-2256.....	74	IN-2504.....	96		
IN-2266.....	48	IN-2516.....	48		
IN-2269.....	93	IN-2517.....	80		
IN-2272.....	111	IN-2525.....	85		
IN-2274.....	74	IN-2527.....	49		
IN-2287.....	93	IN-2528.....	49		
IN-2302.....	49	IN-2529.....	49		
IN-2303.....	49	IN-2534.....	96		
IN-2304.....	49	IN-2538.....	113		
IN-2305.....	85	IN-2539.....	113		
IN-2311.....	37	IN-2540.....	113		
IN-2313.....	47	IN-2543.....	96		
IN-2314.....	77	IN-2544.....	55		

October 2021
PL: 33, Issue 04

Globestock Ltd. reserve the right to change specifications without prior notice.
All information herein is copyright protected by Globestock Ltd. 2021.



Engineering Protection Since 1982