

# Modulift®

working between the hook and the load



**Modular Spreader Beams • Lifting Beams  
Spreader Frames • Custom Design and Manufacture**

# Modulift: Working Between the Hook and the Load

## Our Vision

To be renowned globally as specialist engineers operating in a niche market, concentrating on the provision of custom and complex lifting solutions and exceeding our customers expectations by providing an all round service on the delivery of value for money and quality products.

## Our Mission

To globally deliver our expertise through innovative designs of quality products and customer satisfaction whilst ensuring a safe lifting environment.

## Our Values

- Leadership: Driving the standard of lifting products higher
- Passion: Committed to delivering high quality products and ensuring safety comes first
- Innovation: Inspiring engineering genius
- Quality: We do what we do well

At Modulift, we pride ourselves on being able to offer you a complete lifting engineering service from start to finish. We are here to help you solve your lifting problems, advise on rig planning, design custom lifting equipment, or manufacture quality assured products to the highest specifications.



### Standard Off-the-Shelf Range

\*MOD and CMOD are trademarks of Modulift UK Ltd

### Standard Made-to-Order Range

|                                                                             |                                                                         |                                                                             |                                                                                |                                                                                |                                                                                |                                                                                         |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>QJ2</b><br>Up to 2t at 1.2m/4ft                                          | <b>MOD 24</b><br>Up to 24t at 5m/17ftUp to 8m/26ft at a lower capacity  | <b>MOD 70</b><br>Up to 70t at 10.5m/34ftUp to 14m/45ft at a lower capacity  | <b>MOD 110H</b><br>Up to 170t at 11.5m/37ftUp to 18m/59ft at a lower capacity  | <b>MOD 250/300</b><br>Up to 300t at 13m/40ftUp to 21m/68ft at a lower capacity | <b>MOD 400/500</b><br>Up to 500t at 15m/50ftUp to 24m/78ft at a lower capacity | <b>MOD 600/800</b><br>Up to 800t at 18m/60ftUp to 26m/85ft at a lower capacity          |
| <b>MOD 6</b><br>Up to 6t at 3.6m/148"Up to 4.5m/176" at a lower capacity    | <b>MOD 34</b><br>Up to 34t at 6m/19ftUp to 10m/32ft at a lower capacity | <b>MOD 70H</b><br>Up to 100t at 8.5m/28ftUp to 14m/45ft at a lower capacity | <b>MOD 110SH</b><br>Up to 240t at 10.5m/34ftUp to 17m/55ft at a lower capacity | <b>MOD 250/400</b><br>Up to 400t at 11m/36ftUp to 21m/68ft at a lower capacity | <b>MOD 400/600</b><br>Up to 600t at 14m/46ftUp to 24m/78ft at a lower capacity | <b>MOD 600/1000</b><br>Up to 1000t at 15m/50ft and up to 26m/85ft at a lower capacity   |
| <b>MOD 12</b><br>Up to 12t at 4.75m/15ftUp to 6.5m/21ft at a lower capacity | <b>MOD 50</b><br>Up to 50t at 8m/26ftUp to 13m/42ft at a lower capacity | <b>MOD 110</b><br>Up to 110 t at 14m/46ftUp to 18m/59ft at a lower capacity | <b>MOD 250/250</b><br>Up to 250t at 14m/46ftUp to 21m/68ft at a lower capacity | <b>MOD 400/400</b><br>Up to 400t at 17m/58ftUp to 24m/78ft at a lower capacity | <b>MOD 600/600</b><br>Up to 600t at 21m/70ftUp to 26m/85ft at a lower capacity | <b>MOD 1100/2000</b><br>Up to 2000t at 26m/85ft and up to 36m/118ft at a lower capacity |




# Modular Spreader Beams

Modular Spreader Beams provide the ideal solution for most lifting requirements – versatile and cost-effective, the Modulift range has capacity from 2t to 5000t with spans up to 330ft/100m. The modular configuration and interchangeable components enable Modulift Spreaders to be reused over many lifts. Designed by our engineering experts and manufactured in our own specialist facilities; the Modulift range are the leading Modular Spreader Beams on the market.


Spreader Beams up to 600t are in stock and available worldwide for distribution – please contact Modulift for an immediate quote or further details.

Every Modulift Modular Spreader Beam consists of a pair of End Units and a pair of Drop Links, with interchangeable struts that can be bolted into the assembly between the End Units to either lengthen or shorten the beam to suit the requirements of the lift, making them reusable at different spans.

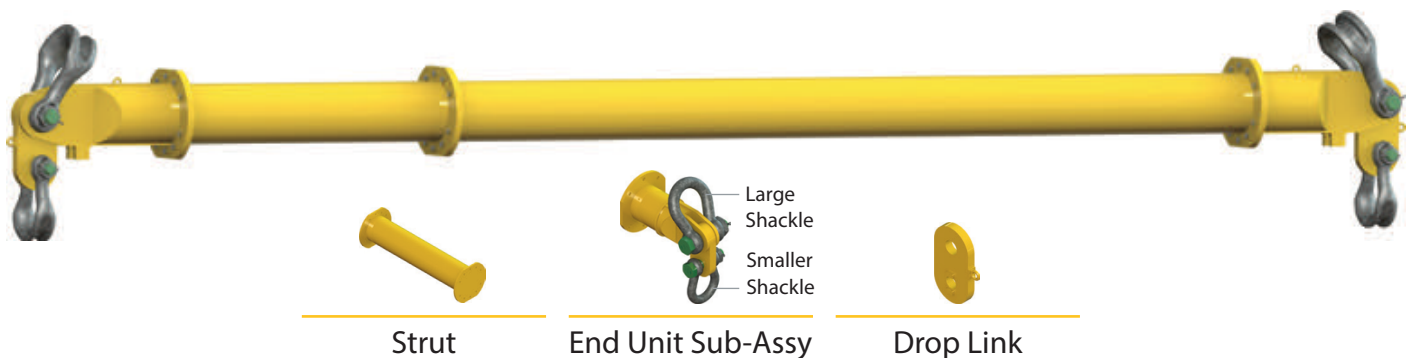


## Flexibility beyond the Spreader Beam

Using our range of interchangeable corner units and T-pieces, Modulift struts can be used throughout the product portfolio to achieve a variety of configurations including 3-point, 4-point, 6-point and 8-point frames. End units also offer maximum flexibility with trunnion and Clevis drop link options enabling the user to have two slings hung from each end of the beam for a variety of benefits. Call or email us for more information.

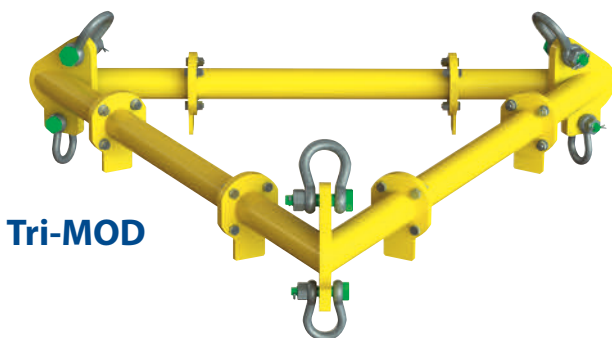

**CMOD**

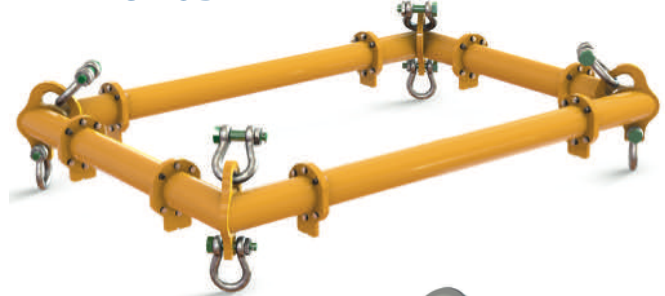

**Trunnion End Units**




**Clevis and Delta Drop Links**



# The Standard Range

## Load v Span Chart - Modulift Spreader Beam MOD 6 to MOD 70H

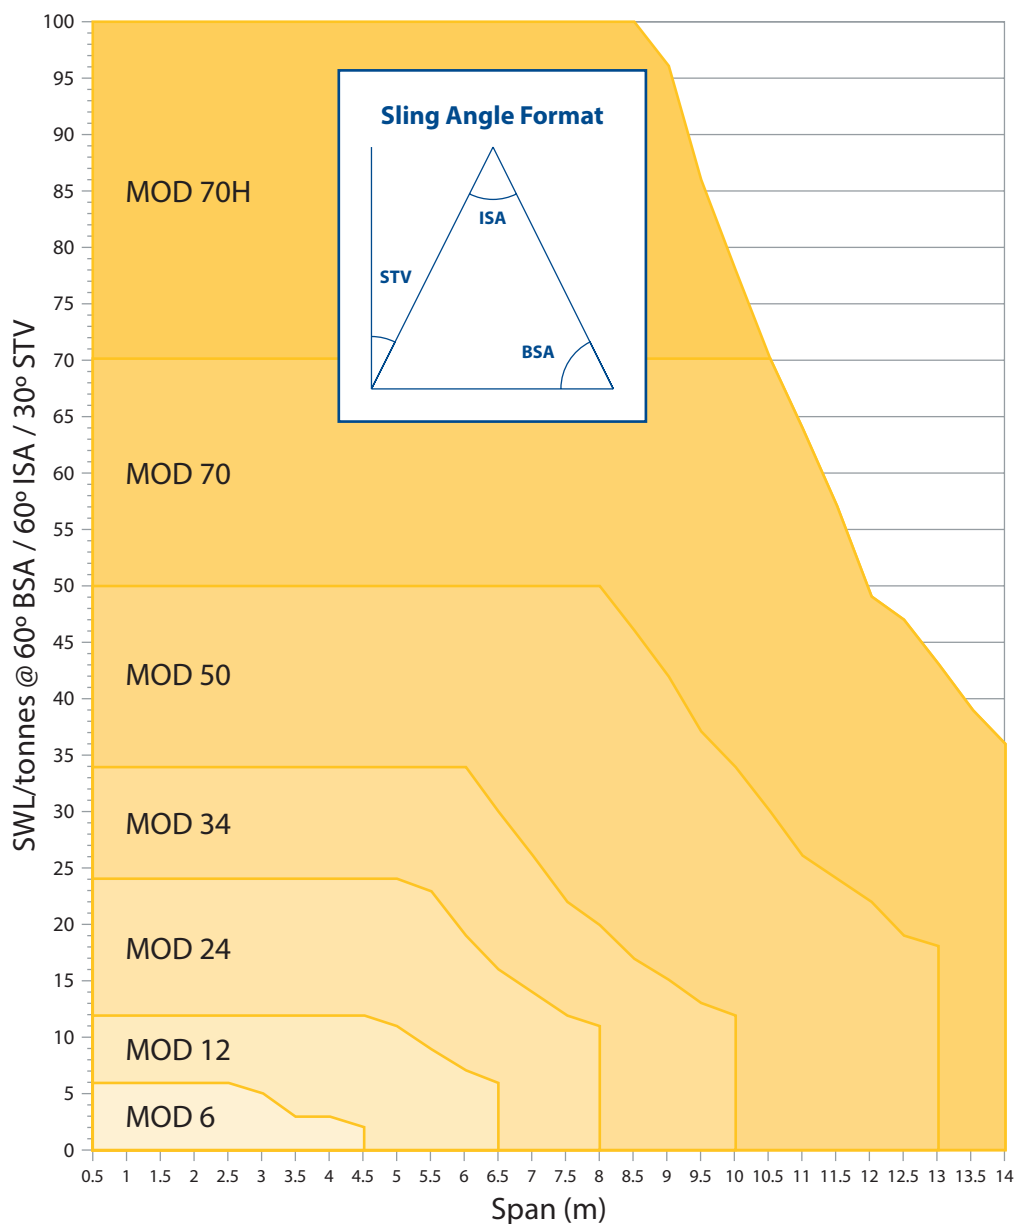

## What size shackle do I need?


### MOD 6

Top: 4.75t  
Lower: 3.25t




### MOD 12

Top: 8.5t  
Lower: 6.5t




### MOD 24

Top: 17t  
Lower: 12t




### MOD 34

Top: 25t  
Lower: 17t




### MOD 50

Top: 35t  
Lower: 25t



### MOD 70/H

Top: 55t/85t  
Lower: 35t/55t




## Components per Set

\* Please note: Custom length Struts are available on request

| Spreader System                  | Strut |      |       |      |      |      |       |      |      |      |      |      |      |   | End unit | Drop link |
|----------------------------------|-------|------|-------|------|------|------|-------|------|------|------|------|------|------|---|----------|-----------|
|                                  | 0.1m  | 0.2m | 0.25m | 0.3m | 0.5m | 0.6m | 0.75m | 1.0m | 1.5m | 2.0m | 3.0m | 4.0m | 6.0m |   |          |           |
| MOD 6                            | 1     | 1    |       | 1    |      | 1    |       | 4    |      |      |      |      |      | 2 | 2        |           |
| MOD 12                           |       |      | 1     |      | 1    |      | 1     | 1    | 3    |      |      |      |      | 2 | 2        |           |
| MOD 24                           |       |      |       |      | 1    |      |       | 1    |      | 3    |      |      |      | 2 | 2        |           |
| MOD 34                           |       |      |       |      | 1    |      |       | 1    |      | 4    |      |      |      | 2 | 2        |           |
| MOD 50                           |       |      |       |      | 1    |      |       | 2    |      | 1    |      | 2    |      | 2 | 2        |           |
| MOD 70/70H                       |       |      |       |      | 1    |      |       | 1    |      | 2    |      | 2    |      | 2 | 2        |           |
| MOD 110/110H                     |       |      |       |      | 1    |      |       | 1    |      | 2    |      | 3    |      | 2 | 2        |           |
| MOD 110SH                        |       |      |       |      | 1    |      |       | 1    |      | 1    |      | 3    |      | 2 | 2        |           |
| MOD 250-250 / 250-300 / 250-400  |       |      |       |      | 1    |      |       | 1    |      | 2    | 1    |      | 2    | 2 | 2        |           |
| MOD 400-400 / 400-500 / 400-600  |       |      |       |      | 1    |      |       | 1    |      | 1    | 1    |      | 3    | 2 | 2        |           |
| MOD 600-600 / 600-800 / 600-1000 |       |      |       |      | 1    |      |       | 1    |      | 1    | 1    |      | 3    | 2 | 2        |           |


## Load v Span Chart - Modulift Spreader Beam MOD 110 to MOD 600/1000\*

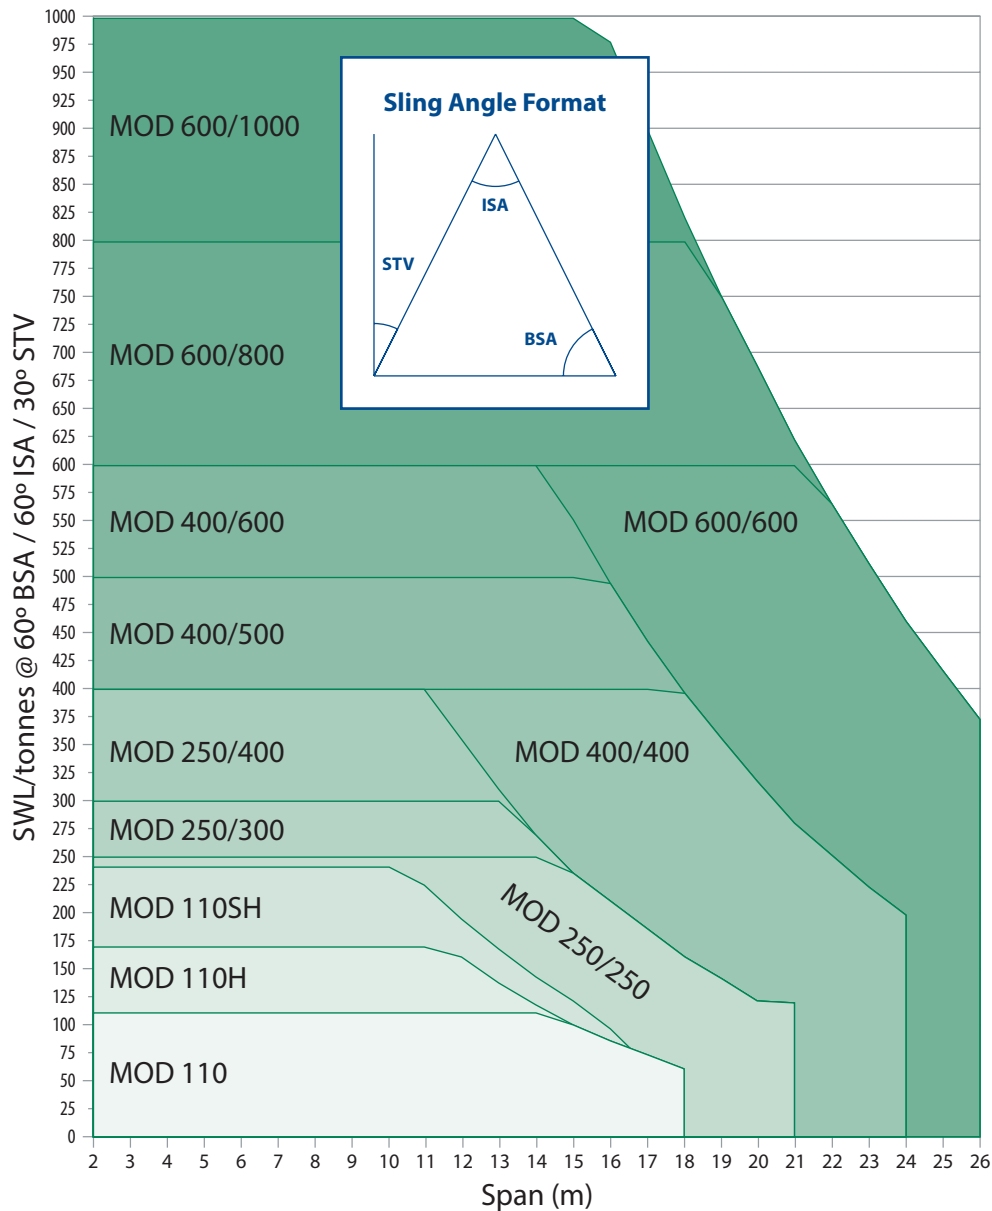

## What size shackle do I need?


### MOD 110 /H/SH

Top: 85t/120t/150t  
Lower: 55t/85t/120t




### MOD 250

Top: 200t-300t  
Lower: 125t-200t




### MOD 400

Top: 300t-400t  
Lower: 200t-400t



### MOD 600+

Top: 300t-600t  
Lower: 200t-500t



\*Load v Span Charts exceeding 1000t are available on request

## Weight per Set (kgs)

\* Weight based on heaviest spreader in series using configuration recommended in user instructions

| Weight                | MOD 6 | MOD 12 | MOD 24 | MOD 34 | MOD 50 | MOD 70, 70H | MOD 110, 110H | MOD 110SH | MOD 250 | MOD 400 | MOD 600 |
|-----------------------|-------|--------|--------|--------|--------|-------------|---------------|-----------|---------|---------|---------|
| Max. Component Weight | 8.1   | 19     | 41     | 51     | 140    | 240         | 367           | 444       | 860     | 1365    | 2665    |
| Min. Component Weight | 0.6   | 1.3    | 5      | 7      | 11     | 17 / 32     | 44 / 55       | 63        | 90      | 135     | 135     |
| Weight at Max. Span   | 32    | 75     | 178    | 290    | 532    | 972/1090    | 1970/2130     | 2628      | 4895    | 8260    | 17260   |

# Born in the UK, raised around the world

## Why are Modulift the leading global spreader beam designer and manufacturer in the market?

|                                   |                                                                                                                                                                                                                     |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Quality Engineering</b>        | Modulift are a team of specialist engineers designing innovative products to optimum specification to ensure a safe lifting environment around the world.                                                           |
| <b>Stock Holding Distributors</b> | Modulift has over 30 stock holding distributors strategically located worldwide allowing you to purchase certified Spreader Beams or components wherever your project is.                                           |
| <b>Standards and Regulations</b>  | Conforming with all international standards, Modulift Spreader Beams are certified wherever you are working.                                                                                                        |
| <b>DNV Type Approval</b>          | Modulift Spreader Beams have DNV Type Approval up to 2000t eliminating the need for additional proof load testing.                                                                                                  |
| <b>Interchangeable</b>            | The modular design allows for multiple lengths to be configured for a variety of lifts. Mix and match end units with struts when long spans and lightweight lifts are required.                                     |
| <b>Economical</b>                 | The modularity of Modulift's Spreader Beam systems enables one beam to perform a variety of lifts by utilizing the different strut configurations and end units.                                                    |
| <b>Portable</b>                   | Our longest strut is only 6m/20' – short enough for the back of a truck! Many of our Spreader Beam components can be handled by one person. Our QJ2 even comes in a handy carrying case complete with Shackles!     |
| <b>Lightweight</b>                | Our Spreader Beams are specially designed to provide you with a lightweight solution so your cranes can work at maximum capacity without the weight of heavy lifting gear.                                          |
| <b>Custom Applications</b>        | While the Modulift Spreader Beam systems aim to provide a solution for almost any lift we understand that not all lifts are equal. We can design and build a custom solution whatever your needs. Contact us today! |

# Multi-point lifting frames

**Spreader Frames and Lifting Frames are recommended for loads that have more than two lifting points; they can also be the ideal lifting equipment for when headroom is limited. Modulift offer several types of Spreader Frames and Lifting Frames for Multi-Point Lifts**

## CMOD Spreader Frames



Our most economical option is the newly designed CMOD Modular Spreader Frame. Lighter and stronger with newly designed corner units giving a 40% weight saving, the CMOD is designed to expand the capabilities of our Modular Spreader Beam System. The struts from the Spreader Beam are combined with 4 Corner Units to complete the Frame. Customers that already have Modulift struts can re-use these with the Corner Units to achieve 4-Point lifts, making this a versatile solution. The CMOD Spreader Frame is currently available from the CMOD 6 up to the CMOD 250. The systems will lift up to 300t.

## CMOD T-Pieces

Expanding on a very popular CMOD Spreader Frame, Modulift have designed and manufactured a T Piece to further develop the capabilities of the CMOD Spreader Frame. This additional connection allows the frame to become a 6 point or 8 point frame.

### Benefits:

- With more lifting points, there is more support for multi-point lifts
- Reduces the rigging compared to a cascading spreader beam arrangement
- Lower head room compared to a cascading spreader beam arrangement

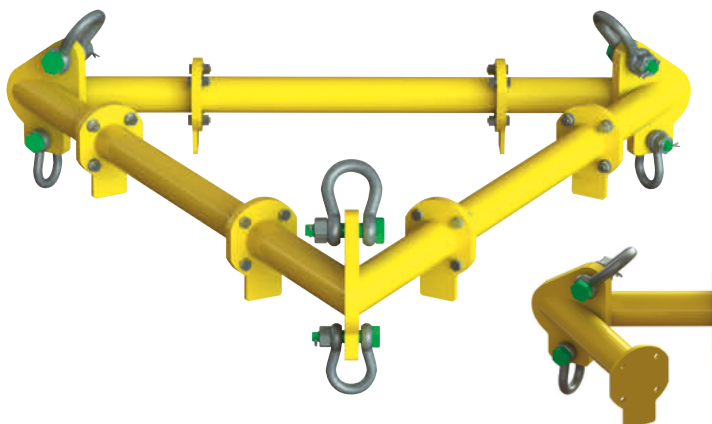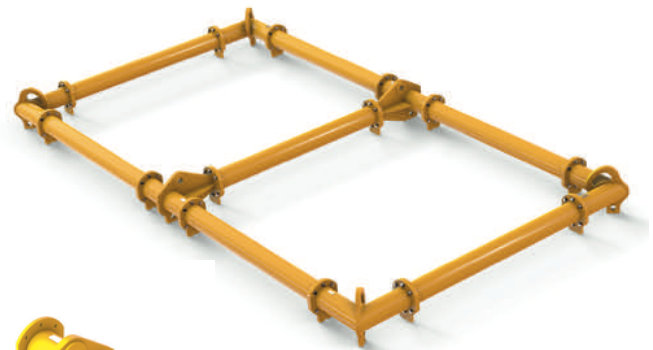

## Tri-MOD

The Tri-MOD is a triangular frame once again utilizing the struts from the Modular Spreader Beam range. The Tri-MOD is popular for many 3-point lift requirements including circular lifts.

# CMOD Load Charts

## Load vs Span Charts – CMOD 6 to CMOD 24

**CMOD 6: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**

|          |     |   |     |   |     |
|----------|-----|---|-----|---|-----|
| 2.5      |     |   |     |   | 8   |
| 2        |     |   |     | 8 | 8   |
| 1.5      |     |   | 8   | 8 | 8   |
| 1        |     | 8 | 8   | 8 | 6   |
| 0.5      | 8   | 8 | 8   | 6 | 6   |
| Span (m) | 0.5 | 1 | 1.5 | 2 | 2.5 |

**CMOD 6: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**

|          |     |   |     |   |     |
|----------|-----|---|-----|---|-----|
| 2.5      |     |   |     |   | 6   |
| 2        |     |   |     | 6 | 6   |
| 1.5      |     |   | 6   | 6 | 6   |
| 1        |     | 6 | 6   | 6 | 4   |
| 0.5      | 6   | 6 | 6   | 4 | 4   |
| Span (m) | 0.5 | 1 | 1.5 | 2 | 2.5 |

**CMOD 12: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**

|          |     |    |     |    |     |    |     |    |
|----------|-----|----|-----|----|-----|----|-----|----|
| 4        |     |    |     |    |     |    |     | 16 |
| 3.5      |     |    |     |    |     |    | 16  | 16 |
| 3        |     |    |     |    |     | 16 | 16  | 15 |
| 2.5      |     |    |     |    | 16  | 16 | 15  | 14 |
| 2        |     |    |     | 16 | 16  | 16 | 14  | 13 |
| 1.5      |     |    | 16  | 16 | 16  | 16 | 14  | 12 |
| 1        |     | 16 | 16  | 16 | 16  | 16 | 14  | 12 |
| 0.5      | 16  | 16 | 16  | 16 | 16  | 16 | 14  | 12 |
| Span (m) | 0.5 | 1  | 1.5 | 2  | 2.5 | 3  | 3.5 | 4  |

**CMOD 12: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**

|          |     |   |     |   |     |   |     |   |
|----------|-----|---|-----|---|-----|---|-----|---|
| 4        |     |   |     |   |     |   |     | 9 |
| 3.5      |     |   |     |   |     |   | 9   | 9 |
| 3        |     |   |     |   |     | 9 | 9   | 8 |
| 2.5      |     |   |     |   | 9   | 9 | 8   | 8 |
| 2        |     |   |     | 9 | 9   | 9 | 8   | 7 |
| 1.5      |     |   | 9   | 9 | 9   | 9 | 8   | 6 |
| 1        |     | 9 | 9   | 9 | 9   | 9 | 8   | 6 |
| 0.5      | 9   | 9 | 9   | 9 | 9   | 9 | 8   | 6 |
| Span (m) | 0.5 | 1 | 1.5 | 2 | 2.5 | 3 | 3.5 | 4 |

**CMOD 24: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**

|          |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|
| 6        |    |    |    |    |    | 23 |
| 5        |    |    |    |    | 30 | 21 |
| 4        |    |    |    | 30 | 24 | 19 |
| 3        |    |    | 30 | 30 | 24 | 18 |
| 2        |    | 30 | 30 | 30 | 24 | 17 |
| 1        | 30 | 30 | 30 | 24 | 22 | 16 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  |

**CMOD 24: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**

|          |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|
| 6        |    |    |    |    |    | 13 |
| 5        |    |    |    |    | 17 | 12 |
| 4        |    |    |    | 19 | 13 | 10 |
| 3        |    |    | 19 | 19 | 13 | 10 |
| 2        |    | 19 | 19 | 17 | 13 | 9  |
| 1        | 19 | 19 | 19 | 13 | 12 | 9  |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  |



# Load vs Span Charts – CMOD 34 to CMOD 70\*

\*CMOD 110 and CMOD 250 graphs available on request

**CMOD 34: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**

|          |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|
| 8        |    |    |    |    |    |    |    | 24 |
| 7        |    |    |    |    |    | 32 |    | 23 |
| 6        |    |    |    |    | 40 | 31 |    | 22 |
| 5        |    |    |    | 40 | 40 | 28 |    | 20 |
| 4        |    |    | 40 | 40 | 34 | 26 |    | 19 |
| 3        |    | 40 | 40 | 40 | 34 | 24 |    | 18 |
| 2        | 40 | 40 | 40 | 40 | 32 | 23 |    | 17 |
| 1        | 40 | 40 | 40 | 40 | 34 | 30 | 22 | 16 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  |

**CMOD 34: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**

|          |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|
| 8        |    |    |    |    |    |    |    | 13 |
| 7        |    |    |    |    |    | 18 |    | 13 |
| 6        |    |    |    |    | 22 | 17 |    | 12 |
| 5        |    |    |    | 27 | 22 | 16 |    | 11 |
| 4        |    |    | 27 | 27 | 19 | 15 |    | 10 |
| 3        |    | 27 | 27 | 25 | 19 | 13 |    | 10 |
| 2        | 27 | 27 | 27 | 22 | 18 | 13 |    | 9  |
| 1        | 27 | 27 | 27 | 27 | 19 | 17 | 12 | 9  |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  |

**CMOD 50: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**

|          |    |    |    |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|----|----|----|
| 11       |    |    |    |    |    |    |    |    |    |    | 32 |
| 10       |    |    |    |    |    |    |    |    |    | 41 | 31 |
| 9        |    |    |    |    |    |    |    |    | 50 | 39 | 29 |
| 8        |    |    |    |    |    |    |    | 50 | 48 | 37 | 28 |
| 7        |    |    |    |    |    |    | 60 | 50 | 45 | 35 | 27 |
| 6        |    |    |    |    |    | 60 | 60 | 50 | 43 | 33 | 26 |
| 5        |    |    |    |    | 60 | 60 | 60 | 50 | 40 | 32 | 25 |
| 4        |    |    |    | 60 | 60 | 60 | 50 | 49 | 38 | 31 | 24 |
| 3        |    |    | 60 | 60 | 60 | 60 | 50 | 47 | 37 | 30 | 23 |
| 2        |    | 60 | 60 | 60 | 60 | 60 | 50 | 45 | 36 | 29 | 23 |
| 1        | 60 | 60 | 60 | 60 | 60 | 60 | 50 | 44 | 35 | 28 | 22 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 |

**CMOD 50: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**

|          |    |    |    |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|----|----|----|
| 11       |    |    |    |    |    |    |    |    |    |    | 18 |
| 10       |    |    |    |    |    |    |    | 23 |    |    | 17 |
| 9        |    |    |    |    |    |    | 28 | 21 |    |    | 16 |
| 8        |    |    |    |    |    | 28 | 27 | 20 |    |    | 15 |
| 7        |    |    |    |    | 34 | 28 | 25 | 19 |    |    | 14 |
| 6        |    |    |    | 40 | 34 | 28 | 24 | 18 |    |    | 14 |
| 5        |    |    | 40 | 40 | 34 | 28 | 23 | 17 |    |    | 13 |
| 4        |    | 50 | 40 | 40 | 28 | 28 | 21 | 17 |    |    | 13 |
| 3        | 50 | 50 | 40 | 40 | 28 | 26 | 21 | 16 |    |    | 12 |
| 2        | 50 | 50 | 50 | 40 | 34 | 28 | 25 | 20 | 16 |    | 12 |
| 1        | 50 | 50 | 50 | 50 | 40 | 34 | 28 | 25 | 20 | 15 | 12 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 |

**CMOD 70: SWL / tonnes @ 60° ISA / 30° STV / 60° BSA**


|          |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|----|----|----|----|
| 12       |    |    |    |    |    |    |    |    |    |    |    | 63 |
| 11       |    |    |    |    |    |    |    |    | 70 |    |    | 60 |
| 10       |    |    |    |    |    |    |    | 80 | 70 |    |    | 58 |
| 9        |    |    |    |    |    |    | 80 | 80 | 70 |    |    | 55 |
| 8        |    |    |    |    |    | 80 | 80 | 80 | 67 |    |    | 53 |
| 7        |    |    |    |    | 80 | 80 | 80 | 70 | 65 |    |    | 51 |
| 6        |    |    |    | 80 | 80 | 80 | 70 | 60 | 62 |    |    | 49 |
| 5        |    |    | 80 | 80 | 80 | 80 | 70 | 60 | 60 |    |    | 47 |
| 4        |    | 80 | 80 | 80 | 80 | 80 | 70 | 60 | 58 |    |    | 46 |
| 3        | 80 | 80 | 80 | 80 | 80 | 80 | 70 | 60 | 56 |    |    | 45 |
| 2        | 80 | 80 | 80 | 80 | 80 | 80 | 70 | 70 | 60 | 55 |    | 44 |
| 1        | 80 | 80 | 80 | 80 | 80 | 80 | 70 | 70 | 60 | 54 |    | 44 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |

**CMOD 70: SWL / tonnes @ 90° ISA / 45° STV / 45° BSA**


|          |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|----|----|----|----|----|
| 12       |    |    |    |    |    |    |    |    |    |    |    | 36 |
| 11       |    |    |    |    |    |    |    |    | 40 |    |    | 34 |
| 10       |    |    |    |    |    |    |    | 40 | 40 |    |    | 33 |
| 9        |    |    |    |    |    |    | 46 | 40 | 40 |    |    | 31 |
| 8        |    |    |    |    |    | 57 | 46 | 40 | 38 |    |    | 30 |
| 7        |    |    |    |    | 60 | 57 | 46 | 40 | 37 |    |    | 29 |
| 6        |    |    |    | 60 | 60 | 57 | 40 | 34 | 35 |    |    | 28 |
| 5        |    |    | 60 | 60 | 60 | 50 | 40 | 34 | 34 |    |    | 27 |
| 4        |    | 60 | 60 | 60 | 60 | 50 | 40 | 34 | 33 |    |    | 26 |
| 3        | 60 | 60 | 60 | 60 | 60 | 50 | 40 | 34 | 32 |    |    | 26 |
| 2        | 60 | 60 | 60 | 60 | 60 | 60 | 50 | 40 | 34 | 31 |    | 25 |
| 1        | 60 | 60 | 60 | 60 | 60 | 60 | 50 | 40 | 34 | 31 |    | 24 |
| Span (m) | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |

# TriMOD Load Charts

## Load v Span Chart - Modulift Tri-MOD 45° STV

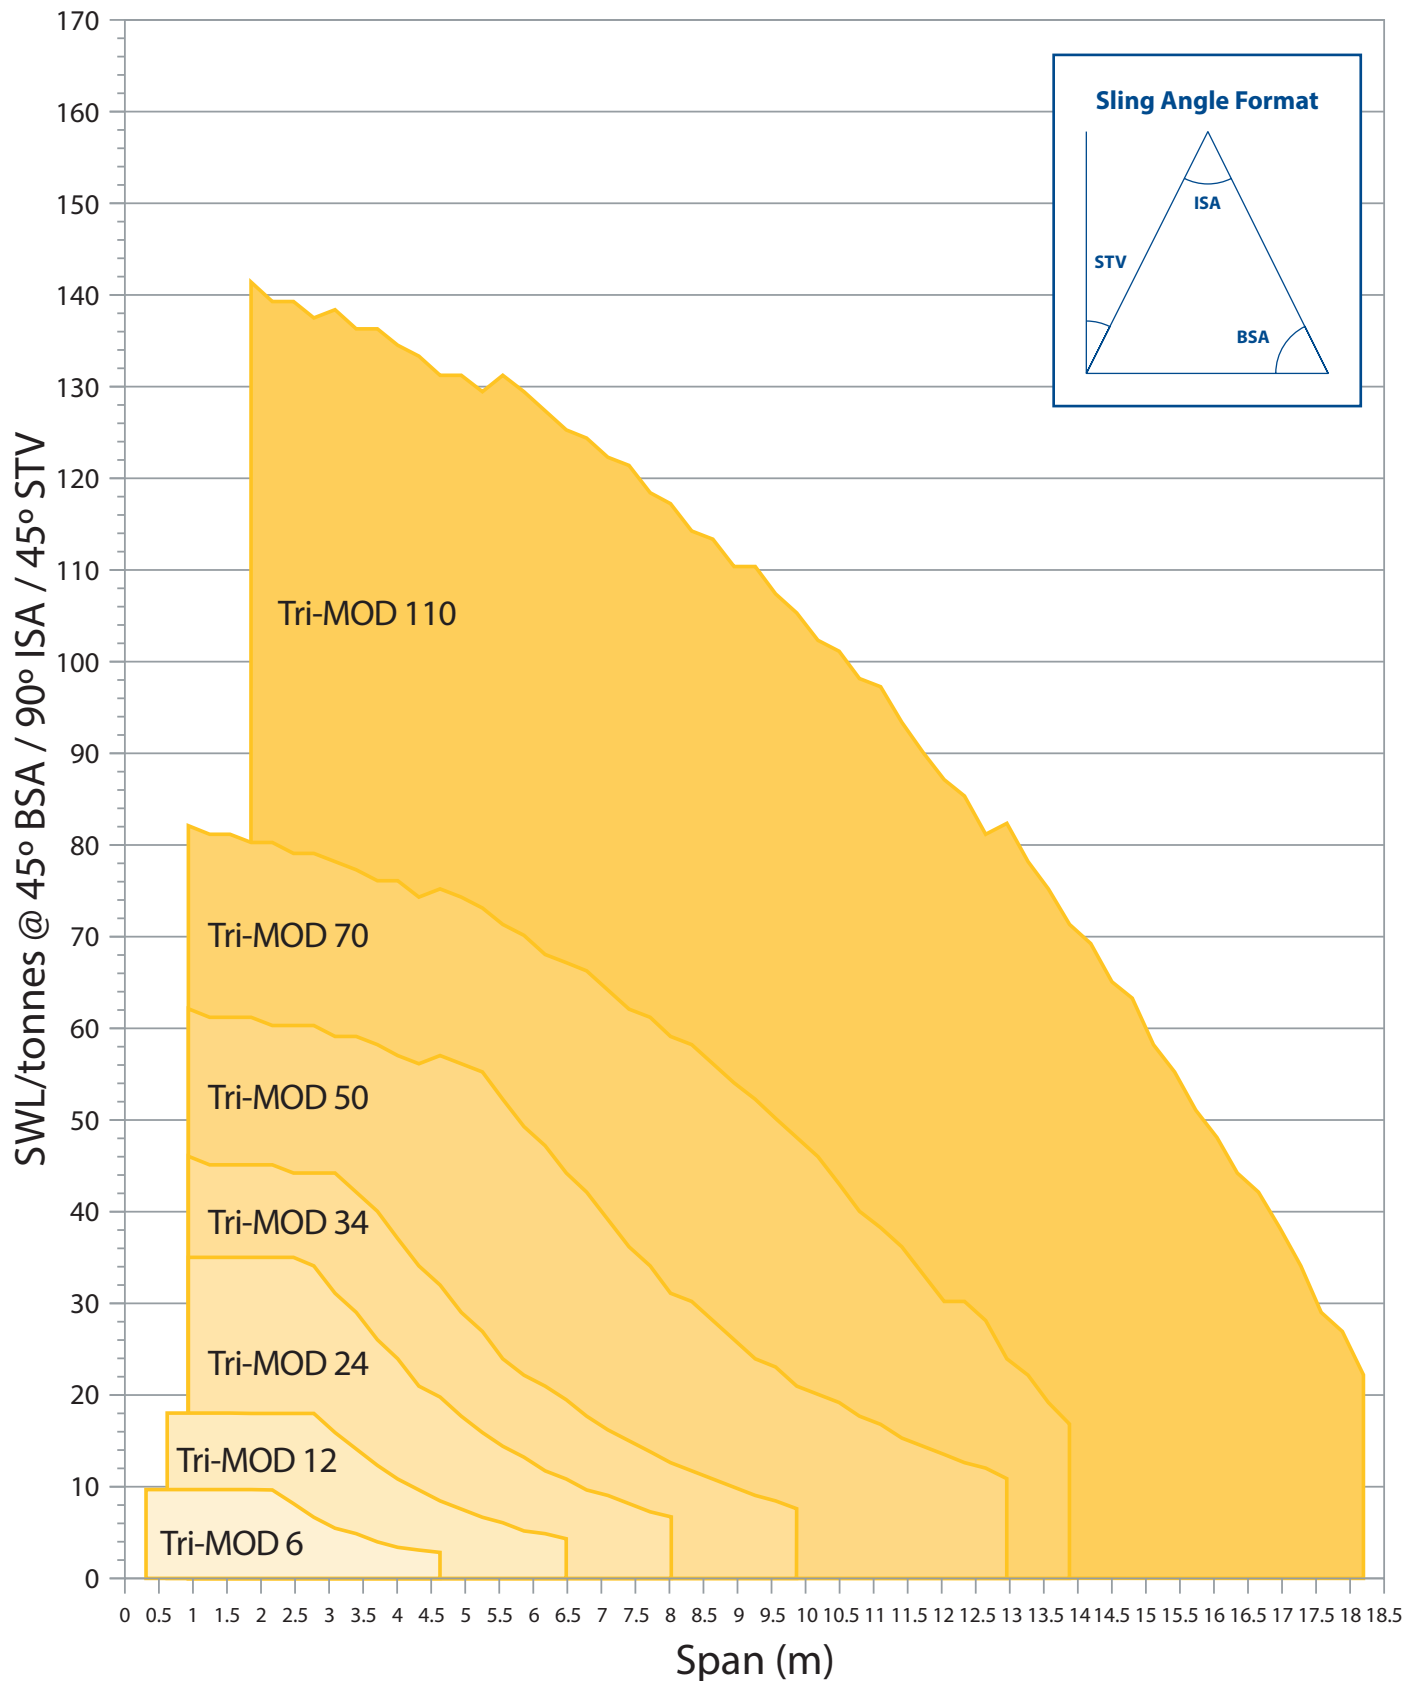

## Load v Span Chart - Modulift Tri-MOD 30° STV

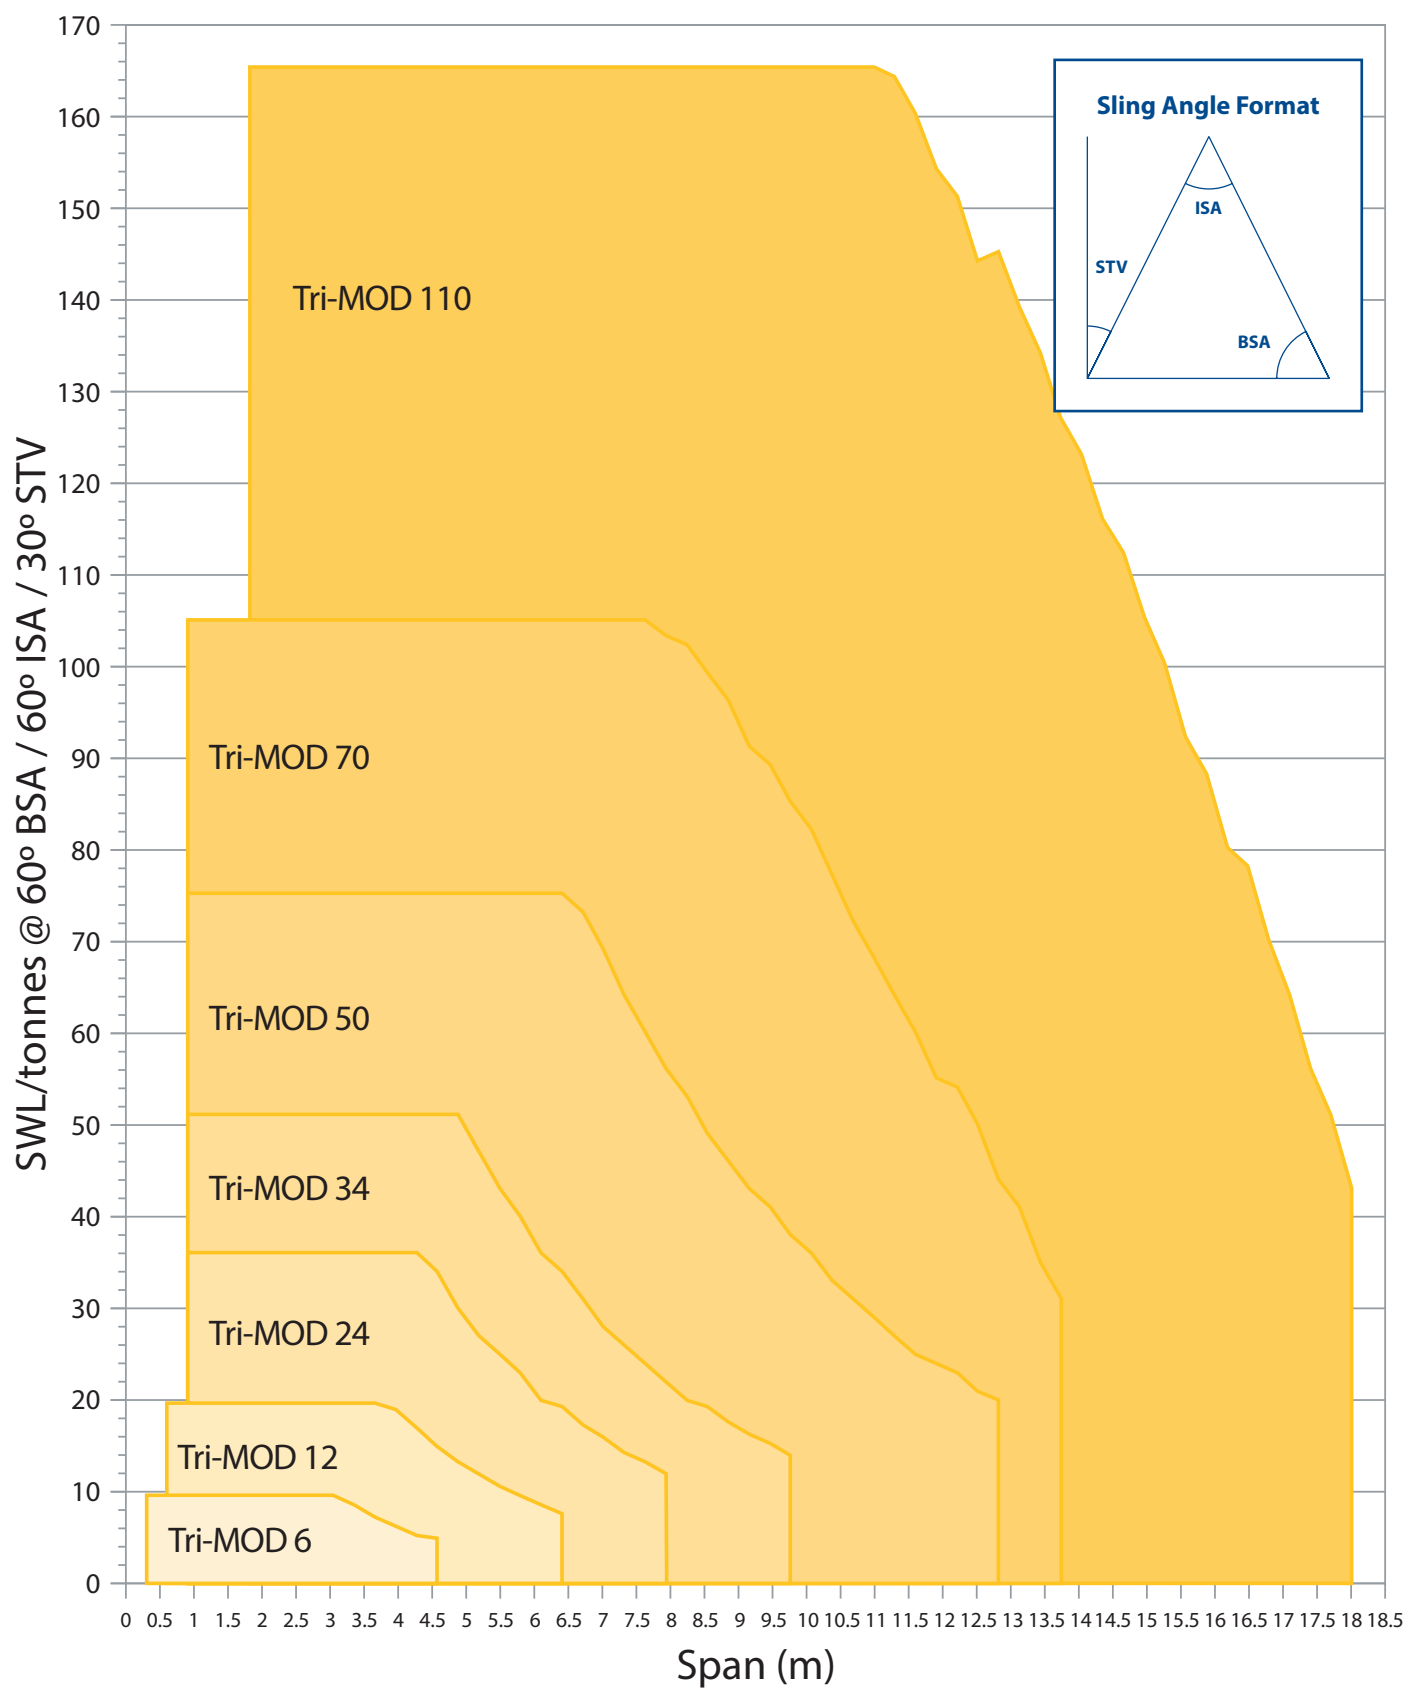

# The Multi-Point Beam

## The Multi-Point Beam is the most adaptable in the Modulift range

The Multi-Point gives unrivalled Modulift strength and reliability with additional features to suit different lifting scenarios.

With lifting points on the top and bottom, the Multi-Point Beam is an innovative piece of kit that can be reused for multiple lifts.

The Multi-Point can be supplied with or without swivel hook, allowing for tandem lifts where there is only one lower lifting point required. It can be used as a semi-spreader to give a steadier lift, and as a Lifting Beam where headroom is limited.



### The Standard Multi-Point Beam



### The Multi-Point Beam with Optional Swivel Hook






## One Beam, Many Uses

The Multi-Point Beam is an essential piece of equipment for use across a whole host of lifting applications. Helping you lift even the most heavy, long or awkward item, and saving rigging time in the process. The Multi-Point is engineered for multiple use giving greater flexibility than a standard beam. A fully adjustable and modular lifting solution.


### Semi-Spreader Beam



### Lifting Beam for Low Headroom Applications

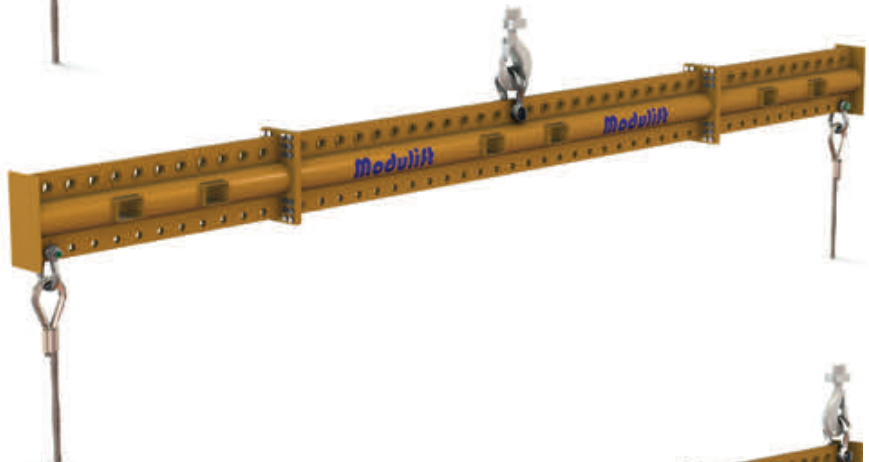

### Tandem Lift

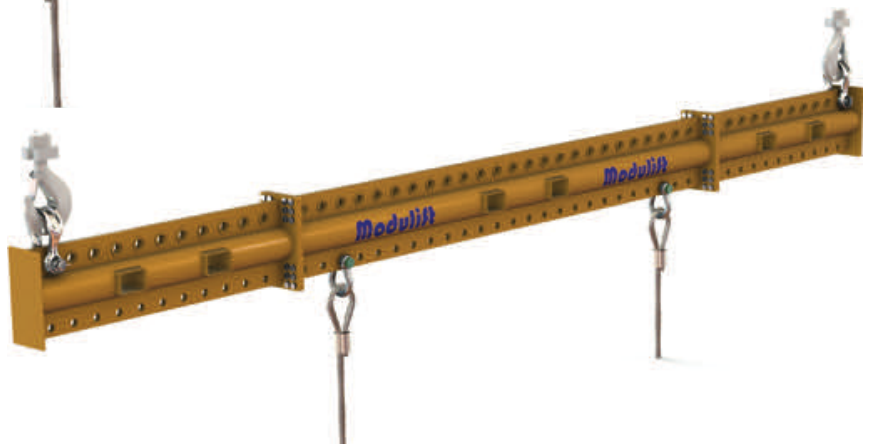

## Why choose the Multi-Point Beam?

- Versatile - can be used as a lifting beam, semi-spreader or for tandem lifts
- Fully adjustable – beam can be reused over many lifts in different set-ups
- Modular design – different length struts are available
- Optional hook – available with or without swivel hook

# CLS - Clamp Lifting System

**The Modulift CLS clamp lifting system provides a safe, fast, and adjustable beam, enabling users to lift from multiple points!**


The MOD CLS clamps are stocked as a boxed product for immediate shipping that eliminates delays incurred waiting for alternative solutions, which often have to be manufactured to order.

The MOD CLS is currently available in several sizes from 8.5t to 27t capacity, depending on configuration, and offered with four clamps as standard to adjust the lifting points to enable flexibility between a single top lifting point (lifting beam) or two top lifting points (semi spreader beam).

The pre-assembled clamps are supplied ready to fit on the beam. The beam is able to be pre-marked to assist with clamp placement for all configurations shown on our User Instructions.


Additional clamps can be purchased to enable multiple lower lifting points to be utilized.

Now  
available  
with a WLL  
of 27t

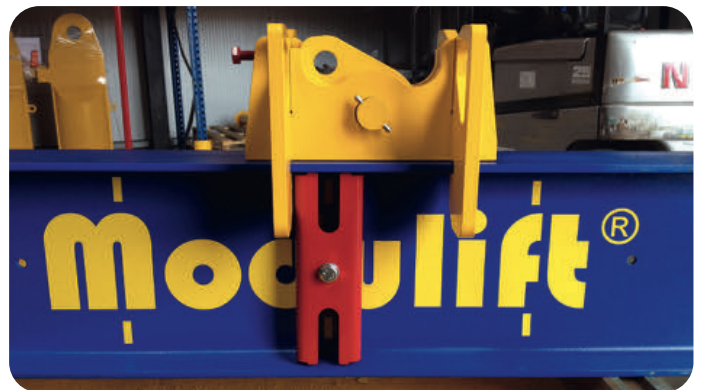

## System Benefits

- Available next day as a boxed off-the-shelf product
- Adjustable lifting points and low headroom capability
- Easy to convert between a Lifting Beam and Spreader Beam
- Spans of up to 6m and capacities of up to 8.5t depending on configuration

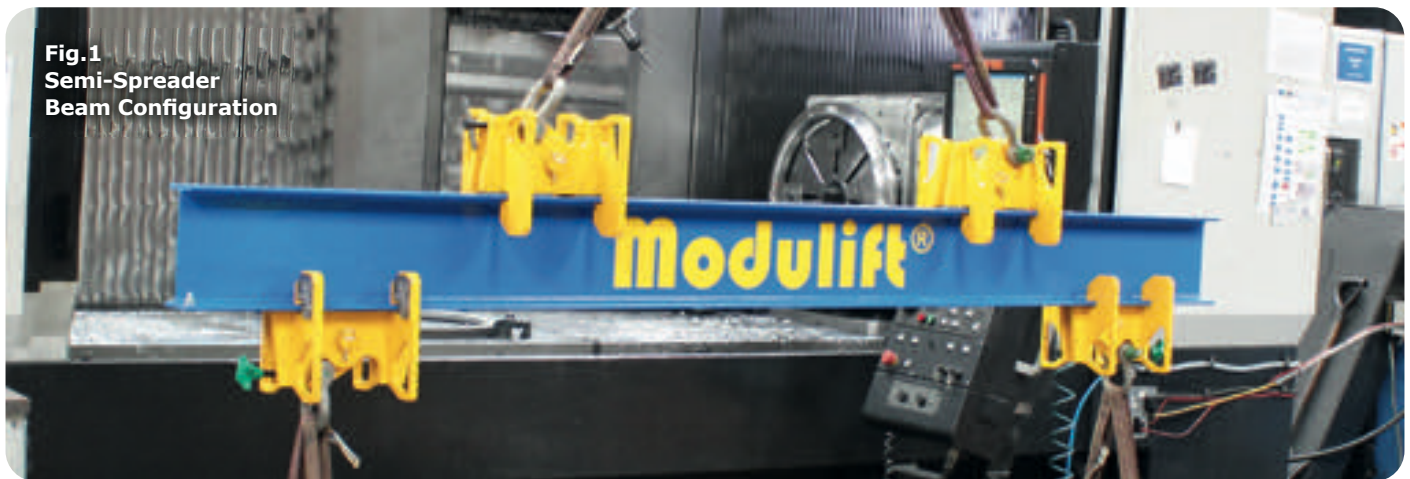

## MOD CLS Specification

- The MOD CLS is rated at 8.5t WLL at 3m span (spreader arrangement). See Load Tables for WLL at other configurations.
- 'Sling to Vertical',  $\beta$ , up to 30 degrees maximum.
- The top Lifting Beam Clamp is rated at 6.5t WLL (vertical) and 4.4t WLL (0–30° STV).
- The bottom Lifting Beam Clamp is rated at 4.75t WLL (vertical).

### WLL v Span Semi-Spreader configuration (2 top lugs, Fig. 1)

If your exact spans are not noted in the table, then please round the spans up or down to the values that will give you the lowest SWL.

| WLL (t)             |      | A – Top Clamp Span (m) |      |      |      |      |      |      |
|---------------------|------|------------------------|------|------|------|------|------|------|
|                     |      | <0.5                   | 1    | 2    | 3    | 4    | 5    | 6    |
| B – Bottom Span (m) | <0.5 | 8.5                    | 8    | 7    | 3.75 | 2.25 | 1.25 | 0.8  |
|                     | 1    | 8                      | 8.5  | 8    | 5.25 | 2.75 | 1.5  | 1    |
|                     | 2    | 7.5                    | 8    | 8.5  | 7.75 | 4    | 2.25 | 1.25 |
|                     | 3    | 4.25                   | 6.25 | 8    | 8.5  | 6    | 3    | 2    |
|                     | 4    | 2.25                   | 3    | 4.75 | 8    | 8    | 4.5  | 2.25 |
|                     | 5    | 1.25                   | 1.75 | 2.25 | 3.75 | 7    | 7.5  | 3.5  |
|                     | 6    | 0.8                    | 1    | 1.25 | 2    | 3    | 5.25 | 6.25 |

### Lifting Beam configuration (1 top lug, Fig. 2)

| B – Bottom Span (m) | ≤ 2 | ≤ 3  | ≤ 4  | ≤ 5  | ≤ 6 |
|---------------------|-----|------|------|------|-----|
| WLL (t)             | 6.2 | 4.25 | 2.25 | 1.25 | 1   |

Contact Modulift if you need a specific WLL value for a specific span or arrangement not covered on the tables above.



# Subsea Spreader Beams

**The Modulift Subsea Spreader Beam has an open section design, therefore being suitable for water submersion by eliminating the risks of any cavity or pressure issues.**



The Subsea Spreader Beam series is available for order while for more job specific requirements or high QA lifts, the Modulift engineering team can design custom made lifting alternatives.

Complying with 'DNV-OS-H206 – Loadout, Transport and Installation of Subsea Objects', the Modulift Subsea range is designed to safely lift loads up to up to 570t.



As with regular Spreader Beams they are fully and correctly assembled when combined with the recommended end units, drop links and shackles top and bottom, which also allows for the options to use ROV shackles where necessary too. Their unique modular elements will as with all Modulift products, provide a versatile and efficient option for deep water lifting and offshore lifting.



## System Benefits

- DNV compliant
- Deep water lifting system
- Lightweight design
- Modular

## Load v Span Charts - Modulift Subsea Spreader Beam Range

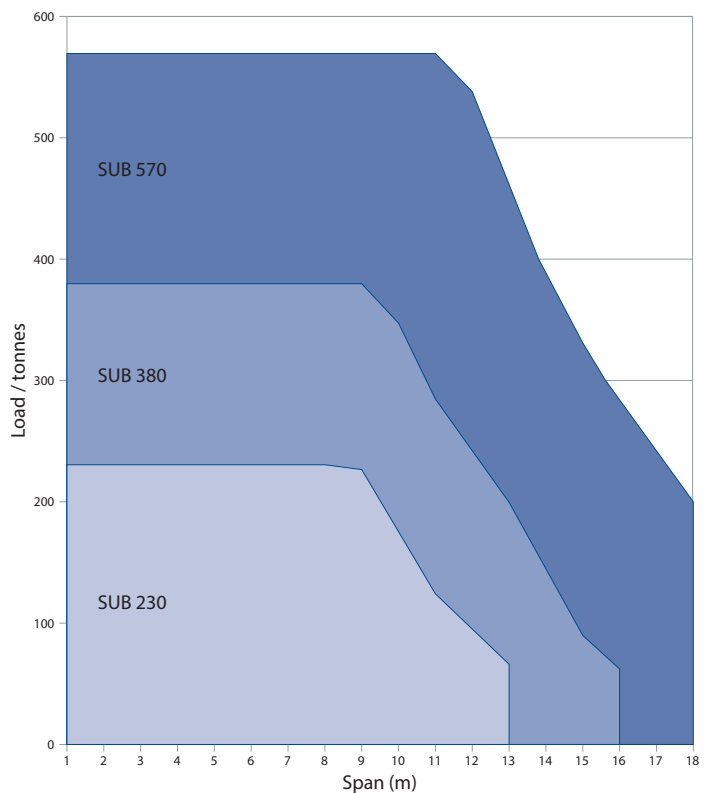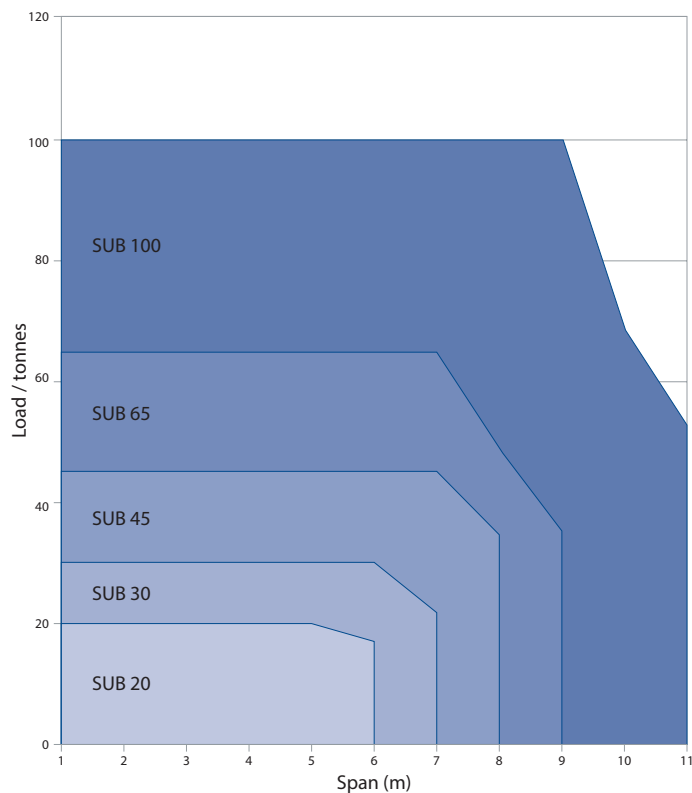

## Subsea Spreader Range Load vs Span Chart 30° STV

| Span / m     | SUB 20 | SUB 30 | SUB 45 | SUB 65 | SUB 100 | SUB 230 | SUB 380 | SUB 570 | Min. sling length / m |
|--------------|--------|--------|--------|--------|---------|---------|---------|---------|-----------------------|
| SWL / tonnes |        |        |        |        |         |         |         |         |                       |
| 1            | 20     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 1                     |
| 2            | 20     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 2                     |
| 3            | 20     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 3                     |
| 4            | 20     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 4                     |
| 5            | 20     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 5                     |
| 6            | 17     | 30     | 45     | 65     | 100     | 230     | 380     | 570     | 6                     |
| 7            |        | 22     | 45     | 65     | 100     | 230     | 380     | 570     | 7                     |
| 8            |        |        | 35     | 49     | 100     | 230     | 380     | 570     | 8                     |
| 9            |        |        |        | 36     | 100     | 228     | 380     | 570     | 9                     |
| 10           |        |        |        |        | 69      | 183     | 345     | 570     | 10                    |
| 11           |        |        |        |        | 53      | 128     | 285     | 570     | 11                    |
| 12           |        |        |        |        |         | 100     | 239     | 535     | 12                    |
| 13           |        |        |        |        |         | 66      | 198     | 455     | 13                    |
| 14           |        |        |        |        |         |         | 140     | 388     | 14                    |
| 15           |        |        |        |        |         |         | 90      | 327     | 15                    |
| 16           |        |        |        |        |         |         | 63      | 282     | 16                    |
| 17           |        |        |        |        |         |         |         | 238     | 17                    |
| 18           |        |        |        |        |         |         |         | 201     | 18                    |



# Lattice Spreader Beams




**Modulift's standard modular Lattice Beams are ideal for lifting longer, lighter loads. For example, long, flexible pipe sections or roof sheet packs that require multiple supports along the span.**

Modulift offer 3t and 5t capacities as standard, with spans up to 30m unsupported centrally, and up to 42m utilising a simple central support sling system. Please contact Modulift for more detail on this if unsure. For heavier more complex lifts, Modulift can also offer a custom solution lattice with capacities 5t–150t.


## Lifting Points/Load Connection Points 6–15m Span

● = connection point for cross bar, and/or connection point for sling to weld eye.  
LC = Lattice Connections  
CB = Cross Beams

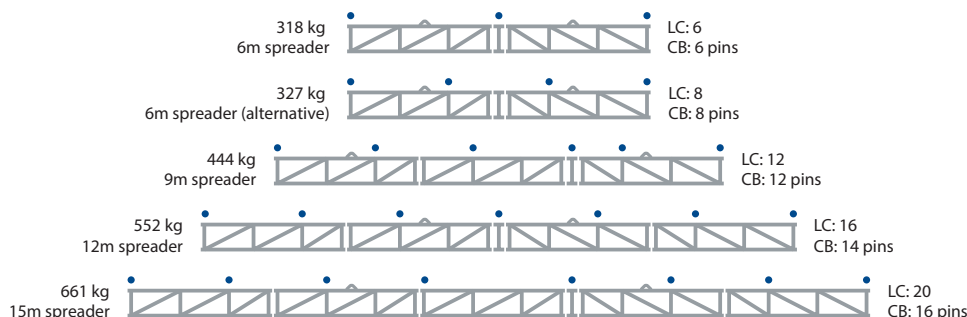


| Spreader                                           | Configuration (frame types) |                                                |   |   |   |   |  | No. of Crossbeams |
|----------------------------------------------------|-----------------------------|------------------------------------------------|---|---|---|---|--|-------------------|
| 6m                                                 | 2                           | 3                                              | 2 |   |   |   |  | 3 or 4            |
| 9m                                                 | 2                           | 1                                              | 3 | 2 |   |   |  | 6                 |
| 12m                                                | 1                           | 2                                              | 3 | 2 | 1 |   |  | 7                 |
| 15m                                                | 1                           | 2                                              | 1 | 3 | 2 | 1 |  | 8                 |
| 1=Type 1 Frame<br>2=Type 2 Frame<br>3=Type 3 Frame |                             | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |  |                   |

## Assembled 18m Lattice Spreader Beam

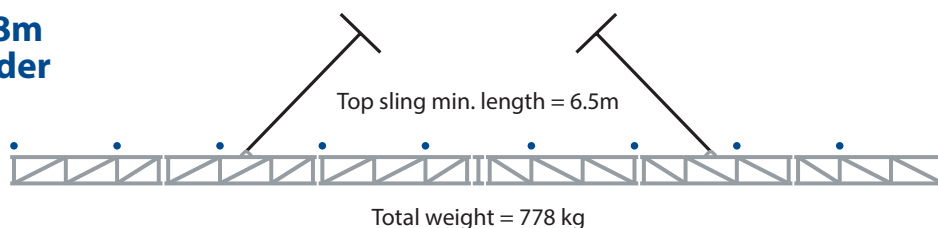


| Spreader                                              | Configuration (frame types) |   |                                                |   |   |   |   |  | No. of Crossbeams |
|-------------------------------------------------------|-----------------------------|---|------------------------------------------------|---|---|---|---|--|-------------------|
| 18m                                                   | 1                           | 2 | 1                                              | 3 | 1 | 2 | 1 |  | 10                |
| Type 1 Frame x4<br>Type 2 Frame x2<br>Type 3 Frame x1 |                             |   | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |  |                   |

## Assembled 21m Lattice Spreader Beam

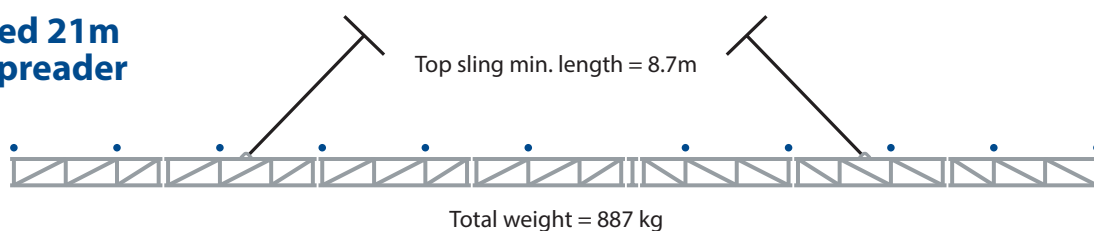


| Spreader                                              | Configuration (frame types) |   |                                                |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|-----------------------------|---|------------------------------------------------|---|---|---|---|---|-------------------|
| 21m                                                   | 1                           | 2 | 1                                              | 1 | 3 | 1 | 2 | 1 | 11                |
| Type 1 Frame x5<br>Type 2 Frame x2<br>Type 3 Frame x1 |                             |   | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |                   |

## Assembled 24m Lattice Spreader Beam

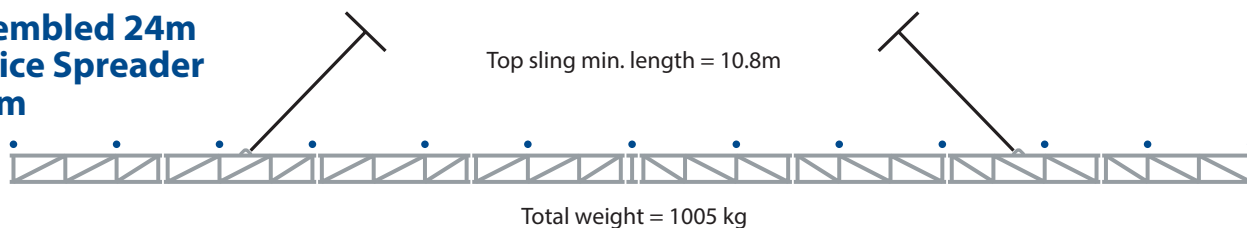

| Spreader                                              | Configuration (frame types) |   |                                                |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|-----------------------------|---|------------------------------------------------|---|---|---|---|---|-------------------|
| 24m                                                   | 1                           | 2 | 1                                              | 1 | 3 | 1 | 1 | 2 | 13                |
| Type 1 Frame x6<br>Type 2 Frame x2<br>Type 3 Frame x1 |                             |   | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |                   |


## Assembled 27m Lattice Spreader Beam

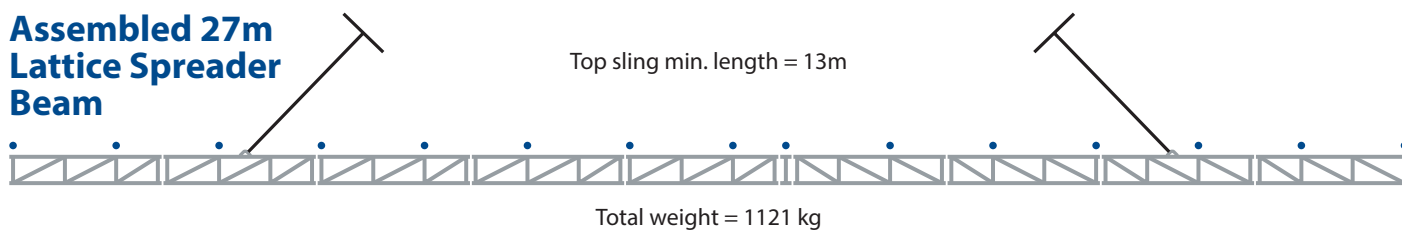

| Spreader                                              | Configuration (frame types) |   |                                                |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|-----------------------------|---|------------------------------------------------|---|---|---|---|---|-------------------|
| 27m                                                   | 1                           | 2 | 1                                              | 1 | 1 | 3 | 1 | 1 | 15                |
| Type 1 Frame x7<br>Type 2 Frame x2<br>Type 3 Frame x1 |                             |   | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |                   |


# Lattice Spreader Beams (continued)

## Assembled 30m Lattice Spreader Beam

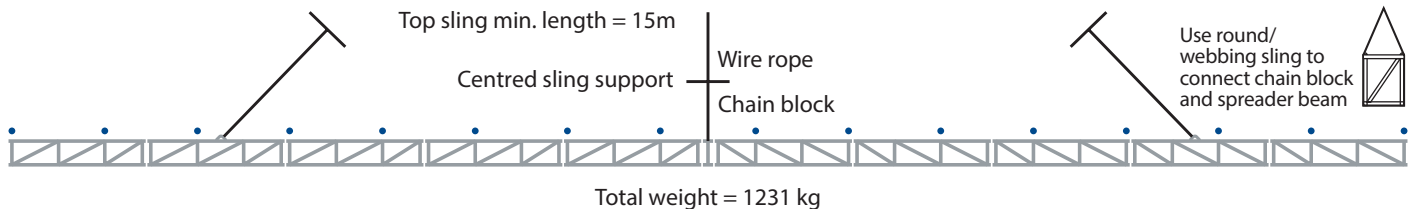


| Spreader                                              | Configuration (frame types)                    |   |   |   |   |   |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|------------------------------------------------|---|---|---|---|---|---|---|---|---|---|-------------------|
| 30m                                                   | 1                                              | 2 | 1 | 1 | 1 | 3 | 1 | 1 | 1 | 2 | 1 | 16                |
| Type 1 Frame x8<br>Type 2 Frame x2<br>Type 3 Frame x1 | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |   |   |   |   |   |                   |

## Assembled 33m Lattice Spreader Beam

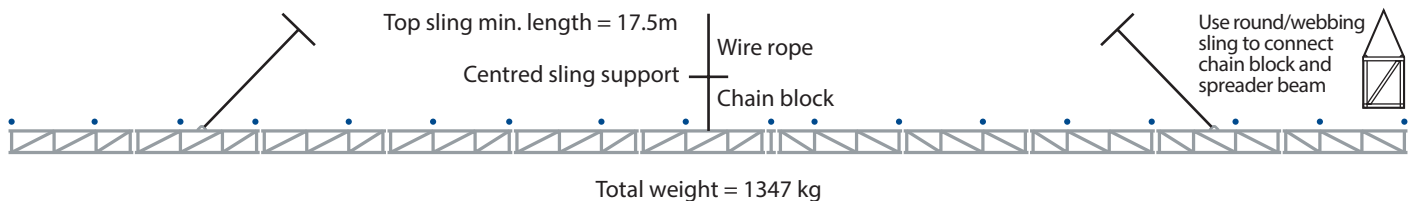


| Spreader                                              | Configuration (frame types)                    |   |   |   |   |   |   |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|-------------------|
| 33m                                                   | 1                                              | 2 | 1 | 1 | 1 | 1 | 3 | 1 | 1 | 1 | 2 | 1 | 18                |
| Type 1 Frame x9<br>Type 2 Frame x2<br>Type 3 Frame x1 | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |   |   |   |   |   |   |                   |

## Assembled 36m Lattice Spreader Beam

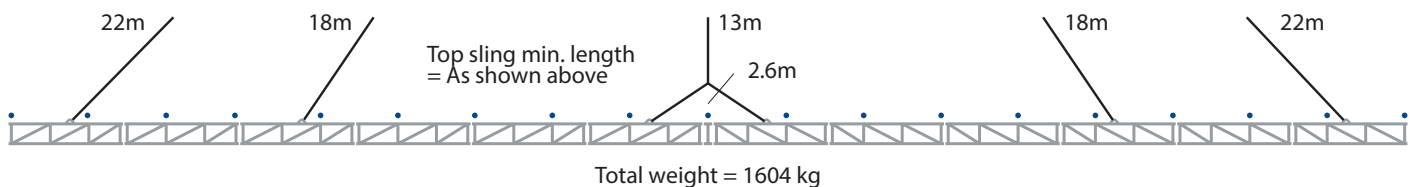


| Spreader                                              | Configuration (frame types)                    |   |   |   |   |   |   |   |   |   |   |   |   | No. of Crossbeams |
|-------------------------------------------------------|------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|-------------------|
| 36m                                                   | 2                                              | 1 | 2 | 1 | 1 | 2 | 3 | 2 | 1 | 1 | 2 | 1 | 2 | 19                |
| Type 1 Frame x6<br>Type 2 Frame x6<br>Type 3 Frame x1 | Maximum 1.5m overhang of roofing sheet per end |   |   |   |   |   |   |   |   |   |   |   |   |                   |

## Assembled 42m Lattice Spreader Beam

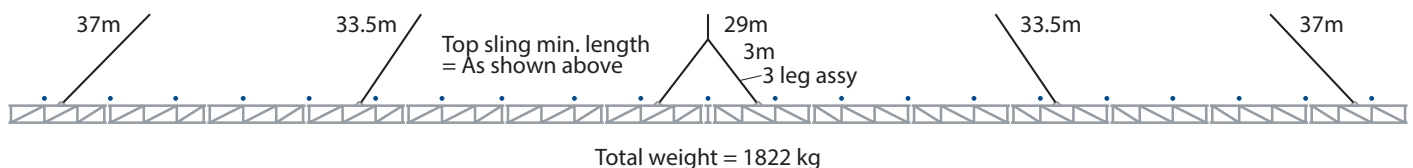

| Spreader                                              | Configuration (frame types) |   |                                                   |   |   |   |   |   |   |   |   |   |   |   |    | No. of Crossbeams |
|-------------------------------------------------------|-----------------------------|---|---------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|----|-------------------|
| 42m                                                   | 2                           | 1 | 1                                                 | 2 | 1 | 1 | 2 | 3 | 2 | 1 | 1 | 2 | 1 | 2 | 21 |                   |
| Type 1 Frame x8<br>Type 2 Frame x6<br>Type 3 Frame x1 |                             |   | Maximum 1.5m overhang<br>of roofing sheet per end |   |   |   |   |   |   |   |   |   |   |   |    |                   |

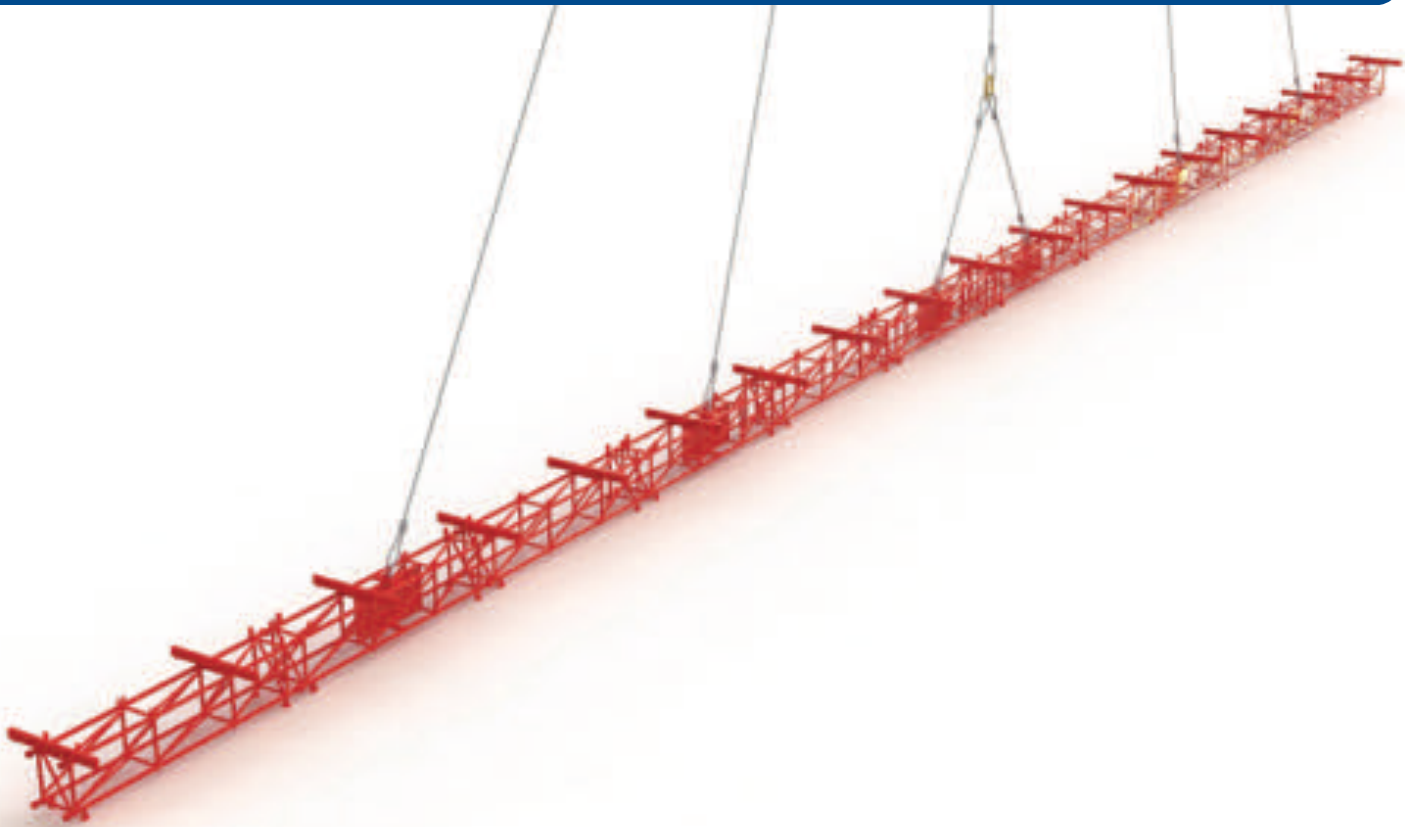



# Regulations, Standards and Compliance

Each Modulift Spreader Beam Series has been proven by being Proof Load Tested in the Modulift compression test rig, and all products have been designed in accordance with the standards listed below:

## UK & Europe Compliance

- BS EN 13155 Cranes – Safety – Non-fixed load lifting attachments
- DNV Standard for Certification DNVGL-ST-0378
- MOD 6 up to MOD 1100/2000 Type Approved by DNV (Spreader Beams Only)
- LOLER (Lifting Operations and Lifting Equipment Regulations)
- PUWER (Provision and Use of Work Equipment Regulations)
- EC Machinery Directive 2006/42/EC
- BS EN 1993-1: 2005: Eurocode 3

## USA Compliance

- ASME B30.20: For Below-the-Hook Lifting Devices
- ASME BTH-1: Design of Below-the-Hook Lifting Devices

## Australian Compliance

- AS 4991: Lifting Devices

## Worldwide Compliance

- ISO 17096: Cranes, Safety, Load Lifting Attachments

## DNV Standard for Certification

Modulift Spreader Beam designs conform to DNV Standard for Certification Lifting Appliances. Modulift is the first and only Spreader Beam Manufacturer in the world to have the globally recognised DNV Type Approval for all Spreader Beams up to 2000t capacity, in accordance with DNV Standard for Certification DNVGL-ST-0378, at no extra cost to the client. For those customers who require a higher level of quality standard, Modulift also provides further options for project specific 3rd party verification. When a project demands the highest level of certification Modulift are able to offer our customers varying degrees of additional DNV certification depending upon their individual QA requirements, including:

- Proof Load Test Survey Report and Record of Test
- DNV Certificate of Conformity for Manufacture & Test (CG3 in accordance with ILO convention 152)

All Modulift  
standard  
spreader  
beams are now  
**DNV Type  
Approved  
up to 2000t  
capacity**



## Ask Modulift about the Level of Options Available to Ensure Your Safe Lift

**Level 1. Standard Modulift Spreader Beams:** In accordance with BS EN 13155. Available CE Marked and supplied with a Certificate of Conformity and DNV Type Approval, up to 400t available off-the-shelf.

**Level 2. Individual Proof Load Testing of Modulift Spreader Beams:** Modulift offer an individual Proof Load Test service with or without 3rd party verification to those requiring a higher level of certification. Please ask for further information.

**Level 3. Modulift Spreader Beams with project specific DNV Certification:** Although our range of Spreader Beams are now DNV Type Approved, we can also offer project specific DNV certification of individual Spreader Beams. It is the ultimate in certification and quality control for the most demanding project specification; a Modulift Spreader Beam individually certified by DNV in terms of design, manufacturing and Proof Load testing. Supplied with a design review report and Certificate of Conformity for Manufacture and Test, issued by DNV.

# Engineered Products Custom Design

**We can design and manufacture a Custom Lifting Solution, providing expert engineering, manufacturing excellence and quality assurance.**

Because not every load fits into a standard mould, our engineering team are lifting industry experts who will work with you and your team, to custom design and build the ideal solution for your lifting requirements. With innovative thinking, we can develop the right equipment to meet your needs whether they be height, environment, weight, flexibility of use, speed of assembly, or transportation requirements to name but a few – we can design a custom solution for you.



Modulift have been building and supplying lifting equipment with high level QA requirements across the Oil & Gas, Renewable Energy, Offshore, Maritime, OEM, Aerospace and Heavy Haulage industries worldwide. We have extensive experience in delivering equipment for these critical projects successfully, on time, and to meet the project's individual requirements -we can design and manufacture a Custom Lifting Solution within 4–6 weeks!

Our sample Case Studies describe Custom Projects where we have either designed and manufactured an entirely 'Custom' lifting solution; Or we have adapted our standard designs/products -tailoring and manufacturing them to meet the highest level of QA standards.



## **Modulift offer a complete Design & Manufacturing service that incorporates key deliverables such as:**

- ITP / Quality Plan
- Full material traceability – 3.1 or 3.2
- Weld Book: WPQR, WPS, WQTC & Weld Mapping
- Procedures & Reports: NDT, Proof Load Testing, and painting

Our team of welder/fabricators are qualified to BS EN 287-1, with specification & qualification of weld procedures to BS EN ISO 15614-1. Welding can also be carried out in compliance with other international standards.

## **International Standards**

In addition there are several International Standards that Modulift's Spreader Beams can be designed to comply with, particularly in reference to offshore applications:

- DNV-ST-N001 – Marine Operations and Marine Warranty
- Lloyds Register: Code for Lifting Appliances in a Marine Environment
- API RP 2A-WSD
- OSHA CR 29 1926.251



## Engineered Products Custom Design (continued)





# Case Studies



## Construction

### Modulift Spreader Beams Lift 17 90,000-lb. Buildings

**Client:** Bryson Crane

Bryson Crane employed two spreader beams, manufactured by Modulift, below-the-hook of a Terex all-terrain crane to lift 17 90,000-lb. prefabricated buildings into position at a communications tower in Edgewater, Florida



## Breakbulk and Ports

### Modulift Spreader Beam supports Iceland's oldest company

**Client:** Heimir og Larus

A Modulift MOD 50 spreader beam with its maximum span of 13 metres, was the perfect partner for lifting four storage tanks, each at a height of 17 metres and weighing 25t for fishing and processing company, Ísfélag Vestmannaeyja hf

## Shipping and Maritime

### Modulift Beams Lift and Travel With Mooring Lines

**Client:** Bridon

Bridon-bekaert Ropes Group supplied a pair of Modulift spreader beams with a series of sheathed spiral strand mooring lines manufactured at the former's Neptune Quay facility in Newcastle, UK for Bluewater Energy Services



## Cargo, Transport and Logistics

### Modulift Spreader Frame Lifts Vehicle for Filming

**Client:** Pinewood Studios

A CMOD spreader frame was used beneath the hook of a mobile crane, lifting a 2000kg vehicle on two occasions during the one-day shoot. The frame combined with chain slings and clamps that attached the rig to the tyres



## Oil, Gas and Wind

### Modulift Lifts the Worlds Largest Gas Turbine!

**Client:** Rolls Royce

Modulift designed and built spreaders to lift the world's most powerful gas turbine, the Rolls-Royce MT30, into the Royal Navy's new aircraft carrier HMS Queen Elizabeth. Rolls Royce viewed the lifting of the gas turbine as a "significant milestone" in the Queen Elizabeth ship building programme

## Lifting Gear

### Modulift and Siemens Design Rig for Dockside Lifts

**Client:** Siemens

Two vertical Benson-type Heat Recovery Steam Generators, the largest HRSGs Siemens have ever constructed, were lifted with a rig utilising a total of 16 34t capacity MOD 34 beams in addition to slings, shackles, tie-plates, and other rigging gear





### ST3 Lifts Jacket Foundations for Wind Farm with Modulift Beams



**Modulift has supplied two large spreader beams to complete a rig that will lift 20 wind farm jacket foundations onto vessels at ST3 Offshore's dockside location in Szczecin, Poland, close to the country's northwestern border with Germany. The jackets are bound for Cuxhaven and will eventually be installed at the Borkum Riffgrund 2 offshore wind farm.**

The two beams, MOD 400/600s, both 8m-long, were used in an inverted configuration above another Modulift beam, an 800/1000, which was hired in from Schmidbauer GmbH & Co. KG. The beams combined with shackles and other rigging gear, including delta plates, to form the rig beneath the hooks of a rail-mounted, 117m-high, 1,400t capacity gantry crane.

The 400/600s offer up to 600t at 14m or 44 ft. and up to 24m or 78 ft. at a lower capacity, while the 800/1000 can lift up to 1,000t at 15m or 51 ft. and up to 26m or 85 ft. at a lower capacity. The foundation jackets weigh 700t apiece and stand 52m high. They are lifted in their entirety onto a barge that can transport three at a time.

John Baker, sales and marketing director at Modulift, explained that the top two 400/600 beams were used in an inverted (upside down) configuration to utilise the four hoist hooks on the crane, and allow the lower slings to come down to a single point on top of the lower 1,000t beam; below that again, two delta plates and a horizontal sling created the vertical angle for the bottom slings that attached the rig to the top of each jacket.

Baker added: "Modulift spreader beams are put into compression when loaded so another beam wouldn't have been suitable at the bottom of the rig between the delta plates because the forces




**“We are continuing to welcome greater demand from the wind energy sector and look forward to meeting many more challenges in the future.”**

applied are tensile rather than compressive. A wire rope grommet acted as a tie sling between the delta plates and created the vertical sling angle for the bottommost slings in the rig.” ST3’s facility is specifically designed for the production of transition pieces, jacket foundations and offshore wind foundation components and other large fabricated structures. In this case, the jacket foundations will be assembled at their destination with 10m-high suction buckets, used to anchor the structures. Water will be pumped out of the buckets to lower pressure and, combined with the weight of the foundation, the structures will sink to the sea floor.

At the time of writing, the first phase of loadout remains ongoing. The rig will stay in Szczecin for the duration of the project. A different lifting and rigging solution will take the weight of offload and installation at Borkum, which is one of the largest offshore power plants in Germany, with a capacity of 450MW, expected to supply electricity to nearly 500,000 households per year. Baker concluded: “It has been fascinating to spend time at the Szczecin site and work with the great team there to consult on this below-the-hook application. The inverted solution was an effective way to utilise the four hoists on the crane and further innovation was demonstrated by the delta plates further down the rig.”



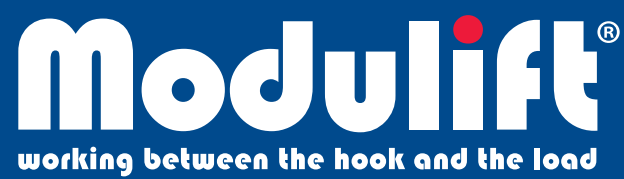

Modulift UK Ltd  
4 Holton Point, Holton Road  
Holton Heath Trading Park, Poole  
BH16 6FL, United Kingdom  
[www.modulift.com](http://www.modulift.com)

GE-UK  
© Copyright Modulift. All rights reserved.